

A red shield-shaped logo with the number '25' in white, indicating a 25th anniversary.

25

The KREISEL logo in white, bold, italicized capital letters on a dark blue rectangular background.

KREISEL®

The FIXIT GRUPPE logo, with 'FIXIT' in a bold, sans-serif font and 'GRUPPE' in a smaller, regular font, followed by the tagline 'BAUSTOFFE MIT SYSTEM' in a small, all-caps font.

FIXIT GRUPPE
BAUSTOFFE MIT SYSTEM

Catalogue

www.kreisel.pl/en



KREISEL®



experience

- ▶ on the Polish market for 25 years
- ▶ one of the leading manufacturers of construction chemicals
- ▶ winner of numerous awards and distinctions
- ▶ 6 production plants and an aggregate mine
- ▶ we form a part of the European FIXIT GRUPPE concern



modernity

- ▶ rich range of high-grade, modern building materials enabling construction, renovation and decoration of flats, houses and offices



certified
laboratories

- ▶ modern laboratories located in each factory in Poland
- ▶ systematic quality control of products in all stages of production



ecological
solutions

- ▶ raising pro-ecological awareness
- ▶ strategy oriented towards the highest standards
- ▶ ecological GREEN WAY Certificate products which meet requirements of European standards

List of products

1.1. Decorative renders 9

1. AKRYTYNK 010 acrylic render	10
2. SILIKATYNK 020 silicate render	10
3. SILIKATYNK Z 021 winter silicate render	10
4. ECO TYNK 022 ECO PROTECT ecological thin-layer render	11
5. NANOTYNK 031 SILIKON PROTECT nano-silicone render	11
6. SISITYNK 040 silicate-silicone render	11
7. BIOTYNK 042 MAX PROTECT polysilicone BIO-render	12
8. POZTYNK-SZ DR 061/BR 062 mineral thin-layer render	12

1.2. Mosaic render 13

9. MOZATYNK-S 051 mosaic acrylic render	13
---	----

1.3. Structural render 14

10. ARCHITECTURAL CONCRETE 055 polymer modelled, structural render	14
11. ROLTYNK 070 mineral decorative render	14

2. Thermal insulation system**2.1. Mortars for thermal insulation systems** 17NEW
NEW

12. LEPSTYR 210 ELASTIC elastic adhesive mortar for graphite and white styrofoam	21
13. STYRLEP 220 ELASTIC specialist elastic reinforcing adhesive to graphite and white styrofoam	21
14. LEPSTYR 210 adhesive for mounting styrofoam panels	21
15. LEPSTYR 210 EXTRA adhesive for mounting graphite styrofoam panels	22
16. LEPSTYR Z 211 winter adhesive for mounting styrofoam panels	22
17. LEPSTYR-W 230 adhesive for mounting mineral wool panels	22
18. LEPSTYR WG 231 adhesive for mounting lamella mineral wool panels in the garage system	23
19. STYRLEP 220 adhesive-reinforcing mortar for styrofoam	23
20. STYRLEP 220 EXTRA adhesive-reinforcing mortar for graphite styrofoam	23
21. STYRLEP-B 225 universal, white adhesive-reinforcing mortar for styrofoam and mineral wool	24
22. STYRLEP-W 240 adhesive-reinforcing mortar for mineral wool	24
23. STYRLEP Z 221 winter adhesive-reinforcing mortar for styrofoam panels	24

2.2. Primers under renders 25

24. TYNKOLIT-U 340 universal priming coat under thin-layer and mosaic plasters	25
25. TYNKOLIT-T 330 priming coat under mineral, acrylic and mosaic plasters	26
26. TYNKOLIT-SA 331 priming coat under silicate plasters	26
27. TYNKOLIT-SO 332 priming coat under silicone plasters	26
28. TYNKOLIT-SISI 333 priming coat under silicate-silicone plasters	27
29. TYNKOLIT Z-SA 341 winter priming coat under silicate plasters (SILIKATYNK Z-SA 021)	27
30. TYNKOLIT G-SA 342 priming coat under a structural paint (PAINT 071)	27

2.3. Decorative elements for thermal insulation systems 28

31. LAZUR acrylic	28
32. DECORATIVE FACADE PLANK	28
33. ELASTIC FACADE PLANK	28

2.4. Accessories for thermal insulation systems 29

34. REINFORCING MESH	29
35. SOCLE STRIP	29
36. PVC CORNER WITH REINFORCING MESH / ALUMINIUM	29
37. DRIP STRIP	30
38. EJOT TRIO	30

2.5. Additional systems 31

39. BALCONY AND TERRACE SYSTEM	31
40. ANTI-MOULD SYSTEM	31
41. TURBO-WG GARAGE SYSTEM	31

3. Paints**3.1. Exterior paints** 34

NEW

42. PRIMER PAINT 018	34
43. ACRYLIC PAINT 001	34
44. SILICATE PAINT 002	34
45. SILICONE PAINT 003	35
46. SISI PAINT 004 silicate-silicone paint	35
47. NANOTECH PAINT 006	35

48.	ELASTIC PAINT 007	36
49.	BIOPAINT 008	36
50.	ECO PAINT 009	36
51.	STRUCTURAL PAINT 071	37

3.2. Indoor paints 38

NEW

52.	PAINT PROFESSIONAL 013	38
53.	ACRYLIC PAINT SUPER WHITE 012	38
54.	INTERIOR PAINT colour 014	38
55.	LATEX PAINT 011	39

4. Tile products 41

4.1. Tile adhesives MULTI line 41

56.	TILE ADHESIVE 100 2 in 1 levelling-adhesive grout, C1T class	42
57.	UNI MULTI 101 indoor tile adhesive, C1 class	42
58.	MULTI 102 basic, frost-proof adhesive, C1T class	42
59.	ELASTI MULTI Specjal 104 elastic, universal adhesive, C2TE class	43
60.	GRES MULTI 105 elastic adhesive for gres, C2T class	43
61.	EXPRESS 106 quick-setting, elastic adhesive for all types of tiles, C2FT class	43
62.	READY-TO-USE ADHESIVE FOR TILES 111, D2E class	44

4.2. Tile adhesives EXPERT line 45

63.	EXPERT 1 freezeproof tile adhesive, C1T class	45
64.	EXPERT 2 elastic gres tile adhesive, C2TE class	45
65.	EXPERT 2 WHITE, elastic adhesive for all types of tiles, C2TE class	45
66.	EXPERT 3 deformable adhesive for all types of tiles, C2TES1 class	46
67.	EXPERT 4 highly-deformable white adhesive for all types of tiles, C2TES2 class	46

4.3. Tile adhesives GEL line 47

NEW

68.	GEL ADHESIVE 1 elastified, C1TE class	47
69.	GEL ADHESIVE 2 with nanoparticles, C2TE class	47
70.	GEL ADHESIVE 3 white, C2TE class	47
71.	GEL ADHESIVE 4 deformable, C2TES1 class	48

NEW

NEW

4.4. Grouts 49

72.	GROUT EPOXI 710 epoxide pointing mortar, 1-10 mm	50
73.	NANOTECH GROUT 730 mortar for pointing with nanoparticles, 1-20 mm	50
74.	SILVER GROUT 731 specialist grout with nanoparticles of silver, 1-20 mm	50
75.	SILICONE NANOTECH 720 silicone sealing compound	51

5. Stone products 53

NEW

NEW

NEW

NEW

76.	KAMLEP PLUS 108 white, elastic adhesive mortar for natural stone	54
77.	FASADE STONE ADHESIVE, C1T class	54
78.	GYPSUM STONE ADHESIVE 681	54
79.	READY-TO-USE STONE ADHESIVE 111K, D2E class	55
80.	GROUT FOR FACADE STONE 702	55

6. Clinker products 57

81.	POZMUR-KL NANO 130 masonry mortar with trass for clinker elements	58
82.	KLINKIER MULTI 112 elastic adhesive for clinker tiles, C2TE class	58
83.	CLINKER GROUT 701 specialist mortar with trass for pointing clinker covering	58
84.	FRONTA 1001 impregnant for clinker	59

7. Primers 61

7.1. Universal primers 61

85.	GRUNTOLIT-W 301 aqueous priming agent	62
86.	GRUNTOLIT-SG 302 deeply penetrating priming agent	63
87.	GRUNTOLIT-SO 305 specialist priming agent under silicone and silicate paints	63
88.	PRIMER UNDER FINISH COATS 306	63

7.2. Primers under gypsum, cement-lime plasters 64

89.	GRUNTOBET 310 primer under gypsum, cement-lime plasters	64
90.	GRUNTOLIT-K 311 concentrated primer under plasters, gypsum adhesives and anhydrite screeds	64
91.	GRUNTOLIT-SK 313 concentrated primer under plasters, gypsum adhesives and anhydrite screeds	64

92.	FOLBIT 800 internal liquid foil	68
93.	FOLBIT EXTRA 805 external liquid foil	68
94.	BUDOSZCZEL-H 810 single-component, waterproof mortar for balconies	68
95.	AQUASZCZEL 820 double-component, cement-polymer waterproof mortar	69
96.	SEALING TAPE	69
97.	WALL CUFF	69
98.	FLOOR CUFF	70
99.	INTERNAL AND EXTERNAL CORNER	70
100.	DYSPERBITUM 830 dispersion bitumen-rubber mass	71
101.	STYRBITUM 832 dispersion adhesive mass	71

9. Gypsum products and finishes

102.	MANUAL-APPLICATION GYPSUM PLASTER 650	74
103.	MACHINE-SPRAYED GYPSUM PLASTER 651	74
104.	MACHINE-SPRAYED light GYPSUM PLASTER 651L	74
105.	MACHINE-SPRAYED HARD GYPSUM PLASTER 651T	75
106.	CONSTRUCTION GYPSUM PLASTER 610	75
107.	GYPSUM ADHESIVE 680	75
108.	GYPSUM 691 mortar for jointing plasterboards	76
109.	GYPSUM PUTTY 690 universal gypsum putty, 1-10 mm	76
110.	GYPSUM FINISHING COAT 601 white gypsum finishing coat, up to 3 mm	76
111.	SUPER WHITE FINISHING COAT 604	77
112.	GIPSEL EXTRA 600 ready-to-use finishing coat, layer up to 2 mm	77
113.	GIPSEL PLUS 603 ready-to-use gypsum finishing coat, layer up to 2mm	77
114.	POZGLADŹ 602 white cement-dolomite finishing coat, layer up to 5 mm	78
115.	LIME FINISH 660 white, ecological lime finish, layer up to 3 mm	78
116.	LIME-CEMENT FINISH 662 freezeproof finish for cement-lime plasters, layer up to 5 mm	78

10. Concrete repair system

117.	RAPID SET ASSEMBLY MORTAR 425 fast-binding cement mortar	82
118.	CEMENT MORTAR 451 contact and anti-corrosive mortar in the concrete repair system	82
119.	REPAIR MORTAR 456 repair mortar 5-50 mm in the concrete repair system	82
120.	PLASTER 460 repair finishing coat 1-10 mm in the concrete repair system	83

11. Renovation

121.	INJECTION AND IMPREGNATION LIQUID 900 liquid for impregnation of walls	86
122.	RENOVATION RENDERING COAT 910	86
123.	RENOVATION SUBSTRATE PLASTER 920 wide-pore, lime-cement substrate plaster, 10-20 mm	86
124.	RENOVATION PLASTER 921 grey, with trass, lime-cement plaster, 10-25 mm	87
125.	RENOVATION PLASTER 922 white, fine-grained lime-cement plaster, 10-20 mm	87
126.	RENOVATION LIME PLASTER 923 white, lime plaster, 10-20 mm	87
127.	RENOVATION FINISH 930 lime-cement finish, layer approx. 3 mm	88
128.	RENOVATION MORTAR 940 reinforced with fibre, fine-grained, lime-cement reparation mortar, 2-15 mm	88

12. Subfloors

129.	SELF-LEVELLING UNDERLAYMENT 200 internal, thick-layer anhydrite screed, 20-60 mm	92
130.	SELF-LEVELLING UNDERLAYMENT 201 internal, universal anhydrite screed, 3-60 mm	92
131.	SELF-LEVELLING SCREED 202, internal, universal anhydrite screed, 2-20 mm, 3h	92
132.	RENOGRUNT 410 cement, thin-layer self-levelling screed, 2-20 mm, 5h	93
133.	RENOGRUNT 411 cement, medium-layer, self-levelling screed, 5-35 mm, 6h	93
134.	RENOGRUNT 412 cement, fast-binding, self-levelling screed, 2-20 mm, 2h	93
135.	RENOGRUNT 414 self-levelling concrete for wood substrates and under parquet, 2-30 mm	94
136.	SCREED 420 freezeproof internal grout which spreads, 15-60 mm	94
137.	GIGA CONCRETE 440 high strength GIGA CONCRETE 40 MPa, freezeproof, from 25 mm	94
138.	CONCRETE SCREED M-15 441 cement, universal, freezeproof floor screed, 25-80 mm	95
139.	CONCRETE B-25 442, cement, universal, freezeproof floor screed, 10-80 mm	95
140.	QUICK-SETTING SCREED 444 quick-setting cement subfloor, 25-80 mm	95
141.	QUICK-SETTING CONCRETE B-30 445 quick-setting, high strength cement mortar, 25-100 mm	96
142.	CONCRETE B-30 446 high strength concrete mortar, freezeproof, from 25 mm	96
143.	STRONG CONCRETE B-20 universal concrete mortar, freezeproof, 25-100 mm	96
144.	LEVELLING MORTAR 428 universal, freezeproof mortar for levelling walls and floors, 2-50 mm	97

13. Masonry mortars

13.1. Masonry mortars 103

145.	POZMUR 115 M5 masonry mortar	100
146.	POZMUR 116 M10 strong masonry mortar	100
147.	POZMUR 117 M15 construction masonry mortar	100
148.	THERMAL INSULATION MORTAR 120	101
149.	PUSTLEP 140 masonry mortar for glass hollow bricks	101

13.2. Winter masonry mortars 102

150.	MURLEP BZ 121 M5 winter, white, thin-layer masonry mortar	102
151.	MURLEP BZ 122 M10 winter, white, thin-layer masonry mortar	103
152.	MURLEP Z 123 M5 winter, thin-layer masonry mortar	103
153.	MURLEP Z 124 M10 winter, thin-layer masonry mortar	103

13.3. Aerated concrete masonry mortars 104

154.	MURLEP 125 M5 thin-layer masonry mortar	104
155.	MURLEP B 126 M5 white, thin-layer masonry mortar	105
156.	MURLEP 127 M10 thin-layer masonry mortar	105
157.	MURLEP B 128 M10 white, thin-layer masonry mortar	105

NEW

14. Plastering mortars 107

158.	HEAT-INSULATING PLASTER 520 heat insulating cement-lime plaster, 5-30 mm	108
159.	CEMENT RENDERING COAT 550	108
160.	POZTYNK 560 traditional, manual plastering mortar, 8-25 mm	108
161.	SMOOTH SPRAY APPLIED PLASTER 500 smooth, freezeproof cement-lime spray applied plaster, 5-15 mm	109
162.	SPRAY APPLIED PLASTER 501 freezeproof cement-lime spray applied plaster, 5-20 mm	109
163.	SUPER LIGHT SPRAY APPLIED PLASTER 503SL machine-applied, cement-lime plaster, ultra-light, 5-25 mm	109
164.	LIGHT WHITE PLASTER 511L machine-applied, cement-lime plaster, 5-15 mm	110
165.	SPRAY APPLIED PLASTER 561 machine-applied, cement-lime plaster, 5-25 mm	110
166.	LIGHT SPRAY APPLIED PLASTER 561L machine-applied, cement-lime plaster, light, 5-25 mm	110

15. Protecting and cleaning agents 113

167.	ANTYGRAFFITI 1006 anti-graffiti protective coating	114
168.	RESIDUE REMOVER 1007 cement and lime sediment remover	114
169.	SEPTOBUD 1008 biocide	114
170.	HYDROMUR-W 1010 water-based hydrophobizing agent	115

16. Additional materials 117

16.1. Additional materials 117

171.	SAND FOR SANDPITS 098	117
172.	DECORATIVE QUARTZ SAND 099	117

16.2. Aggregates 118

173.	AGGREGATE KALETA-5	118
174.	AGGREGATE KALETA-5 SUPER	118

16.3. Colour charts 119

175.	MOSAIC RENDER SAMPLE 051	122
176.	ARCHITECTURAL CONCRETE 055 - MODEL STRUCTURES	123
177.	COLOUR CHART „TRENDY”	123
178.	COLOUR CHART „CALIFORNIA”	124
179.	COLOUR CHART Color Design	125
180.	COLOUR CHART NANOTECH GROUT 730, SILVER GROUT 731	130
181.	COLOUR CHART SILICONE NANOTECH 720	130
182.	COLOUR CHART: POZMUR-KL NANO 130, CLINKER GROUT 701, GROUT FOR FACADE STONE 702	130
183.	COLOR FACADE BOARDS	131

Decorative renders



Table 1. Properties of decorative plasters

	 Mineral POZTYNK-SZ 061	 Acrylic AKRYTYNK 010	 Silicate SILIKATYNK 020	 Silicate-silicone SISITYNK 040	 Silicone SILIKON PROTECT 031	 Polysilicone MAX PROTECT 042	 Ecological ECOTYNK 022
Easy plaster coating	● ●	● ● ● ●	● ● ●	● ● ● ●	● ● ● ●	● ● ● ●	● ● ●
Water vapour permeability	● ● ● ●	●	● ● ● ●	● ● ●	● ● ●	● ● ●	● ● ● ●
Moisture release	● ● ●	●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
CO ₂ permeability	● ● ● ●	●	● ● ● ●	● ● ●	● ● ●	● ● ●	● ● ● ●
Mechanical strength	●	● ● ●	● ●	● ● ●	● ● ●	● ● ● ●	● ● ●
Soiling resistance	● ● ●	● ●	● ●	● ●	● ● ●	● ● ● ●	● ●
Resistance to algae growth	● ● ●	● ●	● ● ●	● ● ●	● ● ●	● ● ● ●	● ● ●
Elasticity	●	● ● ●	● ●	● ● ●	● ● ●	● ● ● ●	● ●
Resistance to natural ageing (UV, frost, ozone)	● ●	●	● ●	● ●	● ● ●	● ● ● ●	● ● ●
Resistance to impacts of industrial atmosphere	●	● ● ●	● ●	● ● ●	● ● ●	● ● ● ●	● ● ●
The range of colours	●	● ● ● ●	● ●	● ● ● ●	● ● ● ●	● ● ● ●	● ● ●

● ● ● ● Very good ● ● ● Good ● ● Satisfactory ● Low

Table 2. Consumption and coverage of decorative plasters, depending on structure and granulation

Type	Approximate plaster consumption per 1sqm and coverage from a 25 kg packaging	
	Mineral plasters (POZTYNK-SZ 061 and 062)	Dispersive plasters (AKRYTYNK 010, SILIKATYNK 020, SILIKON PROTECT 031, SISITYNK 040, MAX PROTECT 042)
0,5 mm	-	1,0 kg (25,0 m ²)
Fleecy texture plaster 1,0 mm	2,1 kg (11,9 m ²)	1,6 kg (15,6 m ²)
Fleecy texture plaster 1,5 mm	2,5 kg (10,0 m ²)	2,4 kg (10,4 m ²)
Fleecy texture plaster 2,0 mm	2,9 kg (8,6 m ²)	3,5 kg (7,1 m ²)
Fleecy texture plaster 3,0 mm	4,3 kg (5,8 m ²)	5,0 kg (5,0 m ²)
1.0 mm pitted (rilled) texture	2,0 kg (12,5 m ²)	-
1.5 mm pitted (rilled) texture	-	1,2 kg (21,0 m ²)
2.0 mm pitted (rilled) texture	2,8 kg (8,6 m ²)	2,4 kg (10,4 m ²)
3.0 mm pitted (rilled) texture	4,1 kg (6,1 m ²)	3,7 kg (6,7 m ²)


AKRYTYNK 010

Acrylic render



Ready-to-use, dyed plaster mortar based on dispersed acrylic resin. For creating thin-layer indoor and outdoor use plaster coats. Incorporated in the TURBO thermal insulation system by KREISEL. After drying, creates an elastic layer, with good mechanical resistance and permanent colour properties. Suitable for spray application.

- grain sizes: 0,5 mm; 1,0 mm; 1,5 mm; 2,0 mm; 3,0 mm
- consumption: 1,5 mm - ca. 2,5 kg/m²
- coverage: ca. 10,0 m²/bucket/BR 1,5 mm



Bucket:

- 25 kg
- 33 pcs per pallet
- pallet weight: 872 kg


SILIKATYNK 020

Silicate render



Ready-to-use, dyed plaster grout based on potassium waterglass. For creating thin-layer indoor- and outdoor-use plaster coats. Incorporated in the TURBO-SA and TURBO-WSA thermal insulation systems by KREISEL. After drying, the grout creates a flexible, mold-resistant and durable plaster layer. Suitable for spray application.

- grain sizes: 0,5 mm; 1,0 mm; 1,5 mm; 2,0 mm; 3,0 mm
- consumption: 1,5 mm - ca. 2,5 kg/m²
- coverage: ca. 10,0 m²/bucket/BR 1,5 mm



Bucket:

- 25 kg
- 33 pcs per pallet
- pallet weight: 872 kg


SILIKATYNK Z 021

Winter silicate render



Ready-to-use, dyed plaster mortar based on potassium waterglass, intended for use in low temperatures - above 0°C. Incorporated in the TURBO Z-SA thermal insulation system. Suitable for spray application. After drying, creates an elastic layer, with good mechanical resistance and permanent colour properties.

- grain sizes: 0,5 mm; 1,0 mm; 1,5 mm; 2,0 mm; 3,0 mm
- consumption: 1,5 mm - ca. 2,5 kg/m²
- coverage: ca. 10,0 m²/bucket/BR 1,5 mm



Bucket:

- 25 kg
- 33 pcs per pallet
- pallet weight: 872 kg


ECO TYNK 022 ECO PROTECT

Ecological thin-layer render



Ready to use plaster, based on ecological polymeric adhesives, natural fillers and aggregates, with Ag+ SILVER TECHNOLOGY biological protection system based on active silver. Thin-layer finishing coats for indoor and outdoor applications. It is included in the TURBO-ECO PROTECT and TURBO W-ECO PROTECT thermal insulation systems with the KREISEL Trademark. Once it is dry, it provides an elastic, durable finishing coat.

- grain sizes: 0,5 mm; 1,0 mm; 1,5 mm; 2,0 mm; 3,0 mm
- consumption: 1,5 mm - ca. 2,5 kg/m²
- coverage: ca. 10,0 m²/bucket/BR 1,5 mm



Bucket:

- 25 kg
- 33 pcs per pallet
- pallet weight: 872 kg


NANOTYNK 031 SILIKON PROTECT

Nano-silicone render



Ready-to-use, dyed plaster mortar based on nano-particle silicone resin. For performing thin-layer indoor- and outdoor-use plaster coats. Incorporated in the TURBO-SO PROTECT and TURBO-WSO PROTECT thermal insulation systems by KREISEL. Suitable for spray application. After drying, creates a hydrophobic, elastic and durable layer. The plaster offers self-cleaning properties, thanks to which it is more resistant to biological overgrowth.

- grain sizes: 0,5 mm; 1,0 mm; 1,5 mm; 2,0 mm; 3,0 mm
- consumption: 1,5 mm - ca. 2,5 kg/m²
- coverage: ca. 10,0 m²/bucket/BR 1,5 mm



Bucket:

- 25 kg
- 33 pcs per pallet
- pallet weight: 872 kg


SISITYNK 040

Silicate-silicone render



Ready-to-use, dyed plaster mortar based on potassium waterglass and silicone emulsion dispersion. For thin-layer indoor- and outdoor-use plaster coats. Incorporated in the TURBO-SISI and TURBO-WSISI thermal insulation systems by KREISEL. After drying, creates a hydrophobic, elastic and durable layer resistant to overgrowth. Suitable for spray application.

- grain sizes: 0,5 mm; 1,0 mm; 1,5 mm; 2,0 mm; 3,0 mm
- consumption: 1,5 mm - ca. 2,5 kg/m²
- coverage: ca. 10,0 m²/bucket/BR 1,5 mm



Bucket:

- 25 kg
- 33 pcs per pallet
- pallet weight: 872 kg


BIOTYNK 042 MAX PROTECT

Polysilicone BIO-render



Ready-to-use mass based on acrylic polymer, intended for installing finishing coats in humid rooms. For creating thin-layer indoor- and outdoor-use plaster coats. Suitable for spray application. After drying, creates a hydrophobic, elastic and durable layer. After drying, the plaster offers self-cleaning properties, thanks to which it is more resistant to biological overgrowth.

- grain sizes: 0,5 mm; 1,0 mm; 1,5 mm; 2,0 mm; 3,0 mm
- consumption: 1,5 mm - ca. 2,5 kg/m²
- coverage: ca. 10,0 m²/bucket/BR 1,5 mm



Bucket:

- 25 kg
- 33 pcs per pallet
- pallet weight: 872 kg


POZTYNK-SZ DR 061, BR 062

Mineral thin-layer render



Cement-based mortar, intended for manual execution of thin-layer dashed plaster structure. Incorporated in the TURBO and TURBO-W thermal insulation systems by KREISEL. After drying, the mortar creates a highly adhesive, vapour-permeable, durable plaster.

- grain sizes: 1,0 mm; 1,5 mm; 2,0 mm; 3,0 mm
- consumption: 2,0 mm - ca. 2,9 kg/m²
- coverage: ca. 8,6 m²/bag/BR 1,5 mm



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

MOZATYNK-S 051

Mosaic acrylic render

A set of products required for preparing coloured mosaic plaster in-store. To develop the colour, stir 4 packages of aggregate in a bucket with the decorative mica additive.


PRODUCTS:

BASE I -Acrylic adhesive



Adhesive for mixing with a single-fraction coloured aggregate (BASE II) to obtain colourful plastering mix.

- density of ready-to-use plaster: approx. 1,75 g/cm³
- temperature of use: from +5°C to +25°C
- storage: up to 12 months from the date of manufacture in undamaged factory packaging and at a temperature from +5°C to +25°C



Bucket BASE I:

- 4 kg
- 48 pcs per pallet

BASE II - Single-fraction coloured aggregate



Aggregate for mixing with adhesive (BASE I) to obtain colourful plastering mix.

- density of ready-to-use plaster: approx. 1,75 g/cm³
- temperature of use: from +5°C to +25°C
- grain size: 1,2 mm and 1,8 mm
- storage: for an indefinite period in undamaged factory packaging

Bag BASE II

- 4 pcs per bucket
- 3 kg

MICA - Decorative additive of mica flakes



Natural aggregate for mixing with adhesive (BASE I) and colourful aggregate (BASE II) to obtain colourful plastering mix.

- packaging: container with 0,25 kg of aggregate
- available colours: silver and black
- storage: BASE MICA - for an indefinite period in undamaged factory packaging.

Bucket MICA

- 1 pcs 4 pcs per bucket
- 0,25 kg


ARCHITECTURAL CONCRETE 055

Polymer modelled, structural render



Styled render, used to create a surface-level imitation of architectonic concrete, concretes and other modelled structures. These styled renders are available not only for creating concrete-like structures but a variety of effects can be achieved. The mortar allows the user to make structural imprints e.g. of a board, in order to construct a pattern. After hardening, the concrete layer is water-proof and freeze-proof, and is highly adhesive and resistant to weathering.

- grain sizes: 0,5 mm
- consumption: depends on the surface, from 1,2 kg/m²
- coverage: up to 12,5 m²/bucket



Bucket:

- 15 kg
- 33 pcs per pallet
- pallet weight: 534 kg




ROLTYNK 070

Mineral decorative render



Cement-based mortar, intended for manual execution of decorative, thin-layer plaster layers. Depending on the tools used, it is possible to model the plaster and achieve various, original textures. Indoor and outdoor use.

- grain sizes: 0,5 mm
- layer thickness: 2-5 mm
- consumption: from ca. 2,5 kg/m²
- coverage: from ca. 10 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

-
- AG+
- SILVER TECHNOLOGY



Places of use of KREISEL facade plasters:						
						
						
						
						
						
						

Legenda:

 RECOMMENDED
  POSSIBLE
  NOT RECOMMENDED

Thermal insulation system

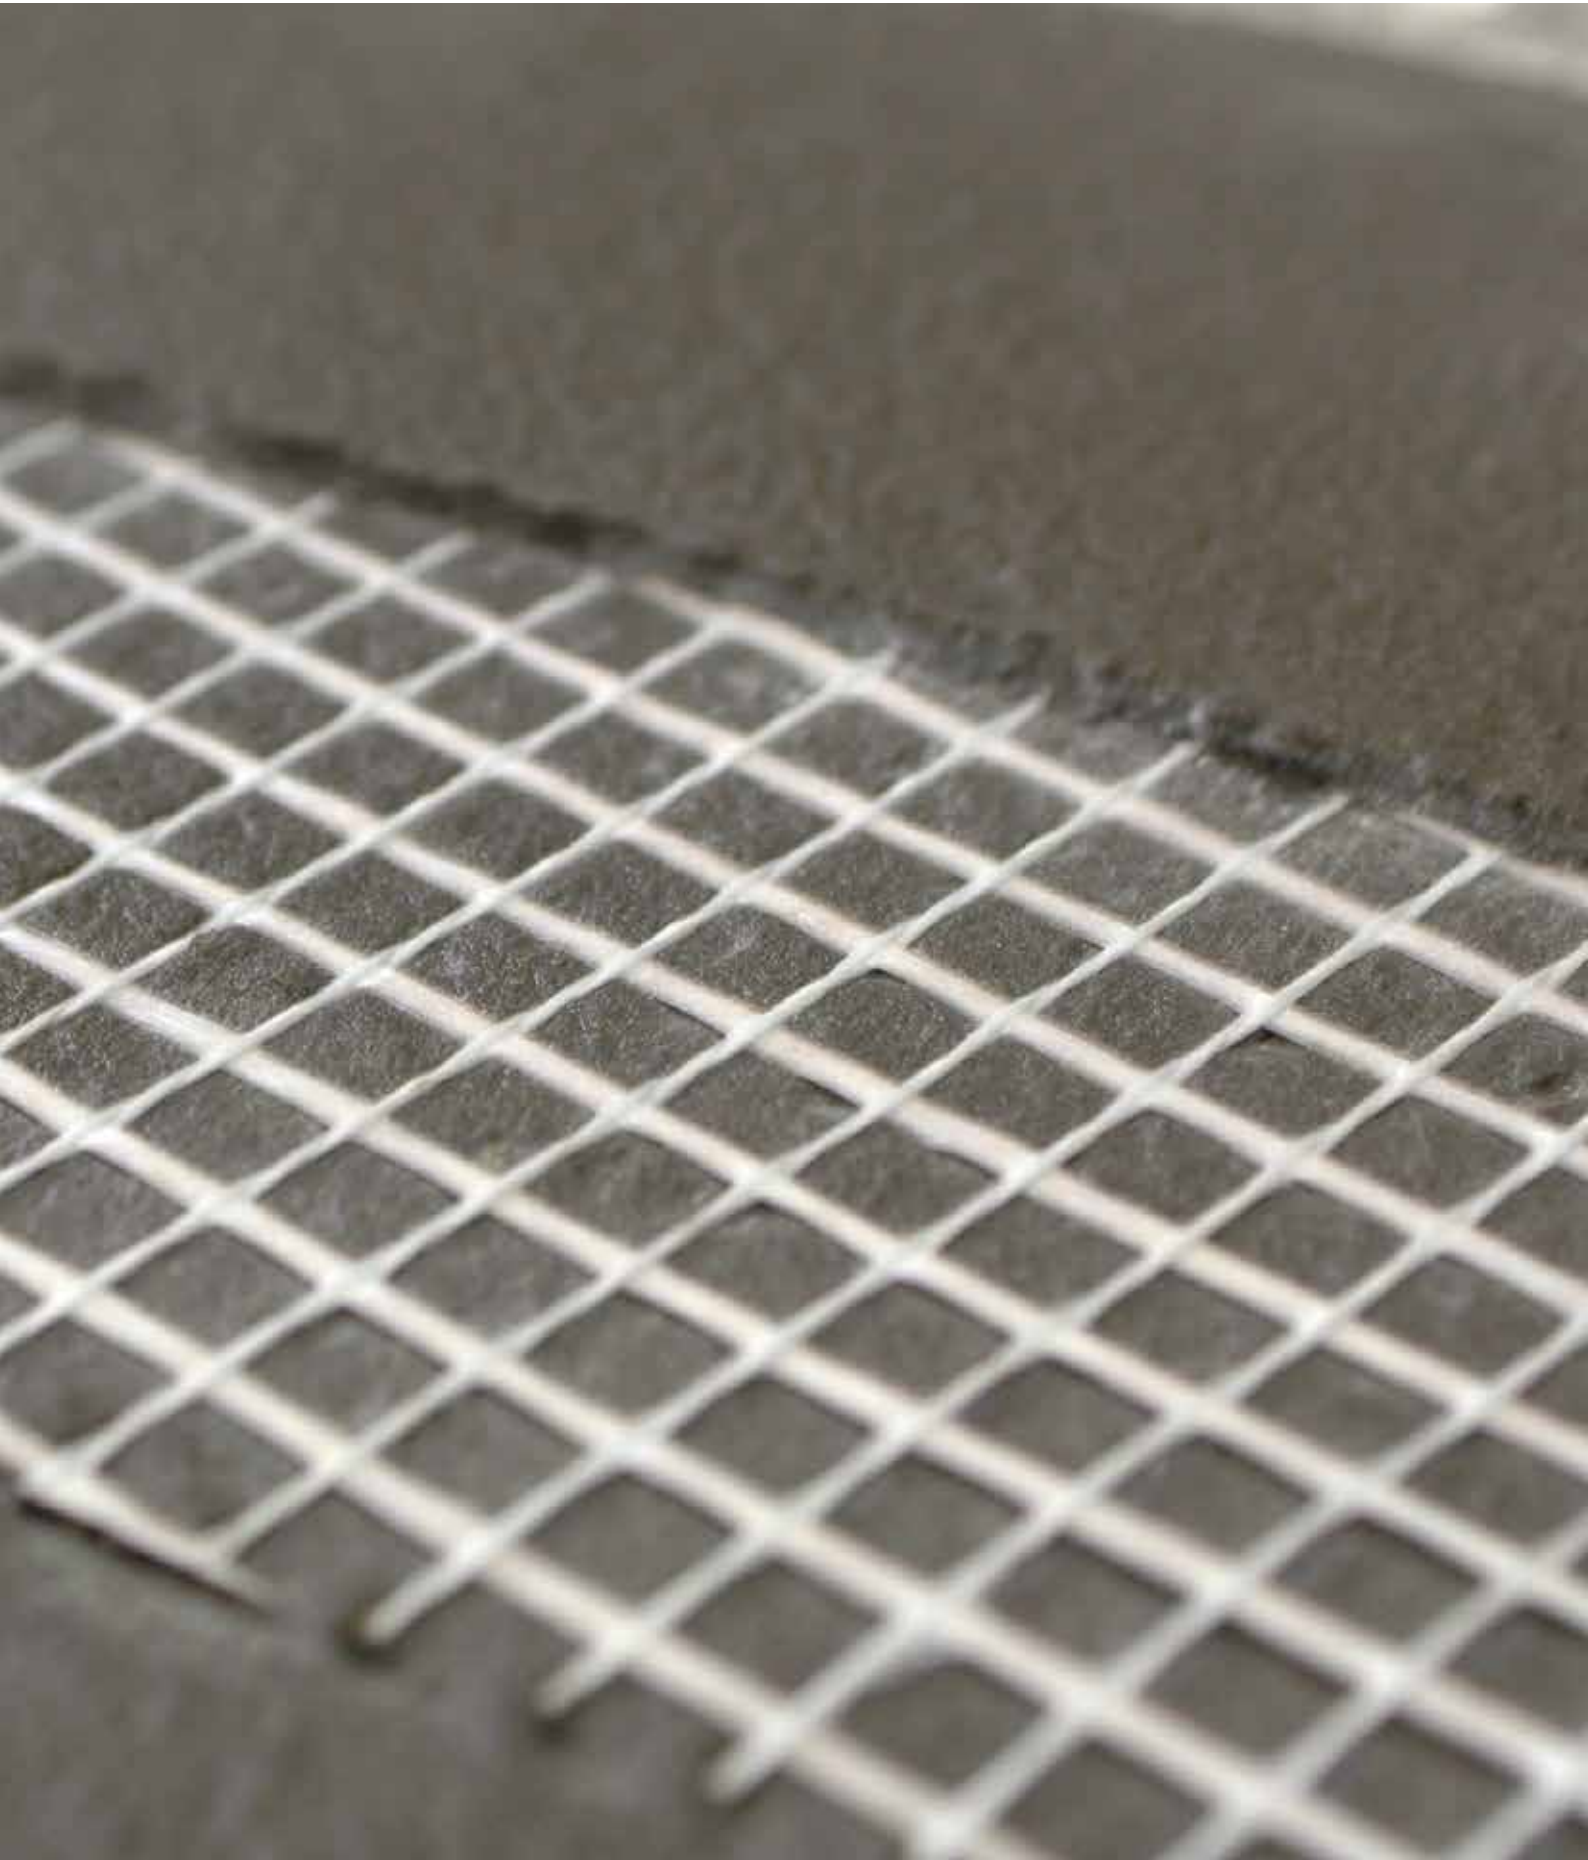


Table 3. Composition of thermal wall insulation systems

		 TURBO ECO PROTECT	 TURBO	 TURBO-S	 TURBO-SA	 TURBO Z-SA
STYROFOAM PANELS		●	●	●	●	●
MINERAL WOOL						
LEPSTYR 210	p. 21	●	●	●	●	
LEPSTYR 210 EXTRA	p. 22	●	●	●	●	
LEPSTYR ELASTIC 210	p. 21	●	●	●	●	
LEPSTYR Z 211	p. 22					●
LEPSTYR- W 230	p. 22					
LEPSTYR- WG 231	p. 23					
STYRLEP 220	p. 23	●	●	●	●	
STYRLEP 220 Extra	p. 23	●	●	●	●	
STYRLEP ELASTIC 220	p. 21	●	●	●	●	
STYRLEP Z 221	p. 22					●
STYRLEP-B 225	p. 24	●	●	●	●	
STYRLEP-W 240	p. 24					
TYNKOLIT-T 330	p. 26		●	●		
TYNKOLIT-SA 331	p. 26				●	
TYNKOLIT-SO 332	p. 26					
TYNKOLIT-SISI 333	p. 27					
TYNKOLIT-U 340	p. 25	●	●	●	●	
TYNKOLIT-Z-SA 341	p. 27					●
TYNKOLIT-G-SA 342	p. 27					
POZTYNK-SZ 061/062	p. 12		●			
AKRYTYNK 010	p. 10			●		
SILIKATYNK 020	p. 10				●	
ECOTYNK 022	p. 11	●				
SILIKATYNK Z-SA 021	p. 10					●
SILIKON PROTECT 031	p. 11					
SISITYNK 040	p. 11					
BIOTYNK 042	p. 12					
STRUCTURAL PAINT 071	p. 37					

					
		TURBO-SISI	TURBO-MAX PROTECT	TURBO-W ECO PROTECT	TURBO-W
STYROFOAM PANELS		●			
MINERAL WOOL				●	●
LEPSTYR 210	p. 21	●	●		
LEPSTYR 210 EXTRA	p. 22	●	●		
LEPSTYR ELASTIC 210	p. 21	●	●		
LEPSTYR Z 211	p. 22				
LEPSTYR- W 230	p. 22			●	●
LEPSTYR- WG 231	p. 23				
STYRLEP 220	p. 23	●	●		
STYRLEP 220 Extra	p. 23	●	●		
STYRLEP ELASTIC 220	p. 21	●	●		
STYRLEP Z 221	p. 22				
STYRLEP-B 225	p. 24	●	●	●	●
STYRLEP-W 240	p. 24			●	●
TYNKOLIT-T 330	p. 26				●
TYNKOLIT-SA 331	p. 26				
TYNKOLIT-SO 332	p. 26		●		
TYNKOLIT-SISI 333	p. 27	●			
TYNKOLIT-U 340	p. 25	●	●	●	●
TYNKOLIT-Z-SA 341	p. 27				
TYNKOLIT-G-SA 342	p. 27				
POZTYNK-SZ 061/062	p. 12				●
AKRYTYNK 010	p. 10				
SILIKATYNK 020	p. 10				
ECOTYNK 022	p. 11			●	
SILIKATYNK Z-SA 021	p. 10				
SILIKON PROTECT 031	p. 11				
SISITYNK 040	p. 11	●			
BIOTYNK 042	p. 12		●		
STRUCTURAL PAINT 071	p. 37				



 TURBO-WSA	 TURBO-WSO PROTECT	 TURBO-W SISI	 TURBO-WG	 TURBO-R	 TURBO-GRAFIT
				●	●
●	●	●	●		
				●	
					●
					●
●	●	●			
			●		
				●	
					●
					●
●	●	●		●	●
●	●	●			
				●	●
●				●	●
	●			●	●
		●		●	●
●	●	●			●
			●		
				●	●
				●	●
●				●	●
					●
	●			●	●
		●		●	●
					●
			●		

Table 4. The scope of adhesive mortars, intended for thermal insulation systems

	 LEPSTYR 210	 LEPSTYR 210 ELASTYCZNY	 LEPSTYR 210 EXTRA	 LEPSTYR Z 211	 LEPSTYR-W 230	 LEPSTYR-WG 231
Styrofoam glueing	●	●	●	●	●	●
Graphite styrofoam glueing	●	●	●	●	●	●
Mineral wool glueing	●	●	●	●	●	●
System reinforcing layer on styrofoam	●	●	●	●	●	●
System reinforcing layer on graphite styrofoam	●	●	●	●	●	●
System reinforcing layer on styrofoam	●	●	●	●	●	●

● recommended ● not recommended

Table 5. The scope of adhesive-reinforcing mortars, intended for thermal insulation systems

	 STYRLEP 220	 STYRLEP 220 ELASTYCZNY	 STYRLEP 220 EXTRA	 STYRLEP Z 221	 STYRLEP-B 225	 STYRLEP-W 240
Styrofoam glueing	●	●	●	●	●	●
Graphite styrofoam glueing	●	●	●	●	●	●
Mineral wool glueing	●	●	●	●	●	●
System reinforcing layer on styrofoam	●	●	●	●	●	●
System reinforcing layer on graphite styrofoam	●	●	●	●	●	●
System reinforcing layer on styrofoam	●	●	●	●	●	●

● recommended ● not recommended

LEPSTYR 210 ELASTIC


NEW

Elastic adhesive mortar for graphite and white styrofoam



Elastic adhesive with improved adhesion to styrofoam and substrate. Characterised by very good working technical properties. Intended for fixing graphite and ordinary styrofoam in TURBO thermal insulation systems. Vapour permeable. On concretes, bricks, hollow bricks, plasters. Waterproof and freezeproof.

- grain sizes: up to 0,5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- consumption: avg ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

STYRLEP 220 ELASTIC


NEW

Specialist elastic reinforcing adhesive to graphite and white styrofoam



Specialist, elastic adhesive intended for embedding reinforcing mesh and fixing graphite and white styrofoam in TURBO thermal insulation systems. Characterised by very good working technical properties. Vapour permeable. On concretes, bricks, hollow bricks, plasters. Waterproof and freezeproof. It contains reinforcing fibres.

- grain sizes: up to 0,5 mm
- layer thickness: 3-5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- consumption: ca. 4-5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


LEPSTYR 210

Adhesive for mounting styrofoam panels



Adhesive for mounting styrofoam panels in thermal insulation systems dedicated for external walls. Can be applied on various types of mineral groundworks: concrete, cement-lime, ceramic, silicate, autoclaved aerated concrete, etc.

- grain sizes: up to 0,5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


LEPSTYR 210 EXTRA

Adhesive for mounting graphite styrofoam panels



Adhesive for mounting graphite and common Styrofoam panels in external thermal insulation systems. Can be applied on various types of mineral groundworks: concrete, cement-lime, ceramic, silicate, autoclaved aerated concrete, etc.

- grain sizes: up to 0,5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


LEPSTYR Z 211

Winter adhesive for mounting styrofoam panels



Intended for mounting Styrofoam panels in low temperature conditions - above 00. Can be applied on various types of mineral groundworks: concrete, cement-lime, ceramic, silicate, autoclaved aerated concrete, etc.

- grain sizes: up to 0,5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


LEPSTYR-W 230

Adhesive for mounting mineral wool panels



Mortar for bonding mineral wool in TURBO systems. It is vapour permeable and resistant to water and frost. On concrete, bricks, hollows and plasters. For lamella and ordinary wool.

- grain sizes: up to 0,5 mm
- concrete adhesion: $\geq 0,25$ MPa
- wool panels adhesion: $\geq 0,08$ MPa
- consumption: ca. 5 kg/m²
- coverage: ca. 5,0 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


LEPSTYR-WG 231

Adhesive for mounting lamella mineral wool panels in the garage system



Mortar designed for lamella mineral wool in thermal insulation systems over unheated rooms. Used on concrete floors, reinforced concrete, prefabricated and densely ribbed. It is vapour permeable and resistant to water and frost.

- grain sizes: up to 0,5 mm
- concrete adhesion: $\geq 0,25$ MPa
- wool panels adhesion: $\geq 0,08$ MPa
- consumption: ca. 5,5 kg/m²
- coverage: ca. 4,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


STYRLEP 220

Adhesive-reinforcing mortar for styrofoam



Joint mortar for embedding reinforcing mesh and sticking polystyrene in TURBO systems. Used on concrete, bricks, hollow bricks, plasters. It contains reinforcing fibers. It is waterproof and resistant to water and frost.

- grain sizes: up to 0,5 mm
- layer thickness: 3-5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


STYRLEP 220 EXTRA

Adhesive-reinforcing mortar for Graphite Styrofoam



Jointed mortar for embedding reinforcement mesh and glueing graphite styrofoam in TURBO systems. Suitable for concrete, bricks, hollows and plasters. It contains reinforcing fibers. It is resistant to water and frost.

- grain sizes: up to 0,5 mm
- layer thickness: 3-5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


STYRLEP-B 225

Universal, white adhesive-reinforcing mortar for styrofoam and mineral wool



Universal glue-reinforcing mortar for ordinary and graphite styrofoam as well as mineral wool. Highly hydrophobic, contains reinforcing fibers. The reinforcing layer made with this mortar does not require priming. It is resistant to water and frost.

- grain sizes: up to 1,0 mm
- layer thickness: 3-5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- wool panels adhesion: $\geq 0,08$ MPa
- consumption: ca. 5,5 kg/m²
- coverage: ca. 4,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


STYRLEP-W 240

Adhesive-reinforcing mortar for mineral wool



Mortar of reinforcing layer and mineral wool bonding in TURBO-W systems. Highly hydrophobic, contains reinforcing fibers. Suitable for concrete, bricks, hollows and plasters. It is resistant to water and frost.

- grain sizes: up to 0,8 mm
- layer thickness: 3-5 mm
- concrete adhesion: $\geq 0,25$ MPa
- wool panels adhesion: $\geq 0,08$ MPa
- consumption: ca. 5,5 kg/m²
- coverage: ca. 4,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


STYRLEP-Z 221

Winter adhesive-reinforcing mortar for styrofoam panels



Specialised mortar for use in low air temperatures above 0°C. Designed for embedding reinforcing mesh and sticking polystyrene in TURBO Z-SA system. It is vapour permeable and resistant to water and frost. Suitable for concrete, bricks, hollows and plasters.

- grain sizes: up to 0,5 mm
- layer thickness: 3-5 mm
- concrete adhesion: $\geq 0,25$ MPa
- styrofoam adhesion: $\geq 0,08$ MPa
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

Table 6. Plaster application options

	 TYNKOLIT-T 330	 TYNKOLIT-SA 331	 TYNKOLIT-SO 332	 TYNKOLIT-SISI 333	 TYNKOLIT Z-SA 341	 TYNKOLIT-U 340
Mineral POZTYNK-SZ 061	●	●	●	●	●	●
ROLYNK 070	●	●	●	●	●	●
Acrylic AKRYTYNK 010	●	●	●	●	●	●
Silicate SILIKATYNK 020	●	●	●	●	●	●
Silicate, winter SILKATYNK-Z 021	●	●	●	●	●	●
Silicone SILIKON PROTECT 031	●	●	●	●	●	●
Silicate-silicone SISITYNK 040	●	●	●	●	●	●
Biotynk MAX PROTECT 042	●	●	●	●	●	●
ECOTYNK 022	●	●	●	●	●	●
Mosaic MOZATYNK-S 050/051	●	●	●	●	●	●

● recommended ● not recommended

TYNKOLIT-U 340

Universal priming coat under thin-layer and mosaic plasters



Specialist primer with high opacity for final preparation of substrates before application of mineral, acrylic, silicate, silicone, mosaic and other plasters. With quartz aggregate. It reduces and levels absorptivity of substrates, facilitates the application of finishing coats and increases their bond strength. Used in TURBO thermal insulation systems.

- drying time: ca. 4 hours
- possibility of further works: after ca. 24 hours
- colour: white or coloured
- consumption: ca. 0,20-0,30 kg/m²
- coverage: up to 100 m²/20 kg

Bucket:

White/Colour:

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg

- 20 kg
- 33 pcs per pallet
- pallet weight: 740 kg



TYNKOLIT-T 330

Priming coat under mineral, acrylic and mosaic renders



The primer is intended for final preparation of substrates before application of mineral, acrylic and mosaic plasters. With quartz aggregate. It reduces and levels absorptivity of substrates, facilitates the application of finishing coats and increases their bond strength.

- drying time: ca. 4 hours
- possibility of further works: after ca. 24 hours
- colour: white or coloured
- consumption: ca. 0,20-0,30 kg/m²
- coverage: up to 100 m²/20 kg

Bucket:

White/Colour:

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg



- 20 kg
- 33 pcs per pallet
- pallet weight: 740 kg

TYNKOLIT-SA 331

Priming coat under silicate renders



The primer based on potassium water-glass is intended for final preparation of substrates before application of silicate plasters. With quartz aggregate. It reduces and levels absorptivity of substrates, facilitates the application of finishing coats and increases their bond strength.

- drying time: ca. 4 hours
- possibility of further works: after ca. 24 hours
- colour: white or coloured
- consumption: 0,20-0,30 kg/m²
- coverage: up to 100 m²/20 kg

Bucket:

White/Colour:

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg



- 20 kg
- 33 pcs per pallet
- pallet weight: 740 kg

TYNKOLIT-S0 332

Priming coat under silicone renders



The specialist primer based on silicone resins is intended for final preparation of substrates before application of silicone plasters. It reduces and levels absorptivity of substrates, facilitates the application of finishing coats and increases their bond strength.

- drying time: ca. 4 hours
- possibility of further works: after ca. 24 hours
- colour: white or coloured
- consumption: ca. 0,20-0,30 kg/m²
- coverage: up to 100 m²/20 kg

Bucket:

White/Colour:

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg



- 20 kg
- 33 pcs per pallet
- pallet weight: 740 kg

TYNKOLIT-SISI 333

Priming coat under silicate-silicone renders



The specialist primer is intended for final preparation of substrates before application of silicate-silicone plasters. It reduces and levels absorptivity of substrates, facilitates application of finishing coats and increases their bond strength.

- drying time: ca. 4 hours
- possibility of further works: after ca. 24 hours
- colour: white or coloured
- consumption: ca. 0,20-0,30 kg/m²
- coverage: up to 100 m²/20 kg

Bucket:

White/Colour:

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg



- 20 kg
- 33 pcs per pallet
- pallet weight: 740 kg

TYNKOLIT Z-SA 341

Winter priming coat under silicate renders (SILIKATYNK Z-SA 021)



The specialist primer is intended for application at lower temperatures over 0°C. It is intended for final preparation of substrates before application of silicate plasters. It reduces and levels absorptivity of substrates, facilitates application of finishing coats and increases their bond strength. Used in TURBO Z-SA winter system.

- drying time: ca. 12 hours
- possibility of further works: after ca. 24 hours
- colour: white or coloured
- consumption: ca. 0,20-0,30 kg/m²
- coverage: up to 100 m²/20 kg

Bucket:

White

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg



- 20 kg
- 33 pcs per pallet
- pallet weight: 740 kg

TYNKOLIT G-SA 342

Priming coat under a structural paint (PAINT 071)




The primer is intended for final preparation of substrates before application of a structural paint in TURBO-WG garage system. It reduces and levels absorptivity of substrates, facilitates application of structural paint finishing coats, increasing its bond strength.

- drying time: ca. 12 hours
- possibility of further works: after ca. 24 hours
- pH: ca. 8
- colour: white
- consumption: ca. 0,20-0,30 kg/m²
- coverage: up to 100 m²/20 kg

Bucket:

White

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg



- 20 kg
- 33 pcs per pallet
- pallet weight: 740 kg

LAZUR acrylic 1003*Colourful finishing of FACADE PLANK*

Lazur acrylic for finishing of FACADE PLANK. Resistant to UV. The colour imitates a natural tint of wood.

- consumption: approx. 0,10 l/m² in case of painting once
- coverage: up to 25 m²/2,5 l

**Bucket:**

- 2,5 l
- 100 pcs per pallet
- pallet weight: 350 kg
- 5 l
- 80 pcs per pallet
- pallet weight: 545 kg

DECORATIVE FACADE PLANK

Decorative panel with natural reproduction of wood grains in white. Milled edges give a unique, natural appearance to the facade. It is suitable for small areas and large areas of a surface facade. Adhesive 111 (mounting of plank) supplements the system, LAZUR Acrylic 1003 and waterproofing preparation HYDROMUR-W 1010 and ACRYLIC PAINT 001.

- dimensions of plank: 1980 mm x 160 mm x 10 mm
- area of 1 item: 0,26 m²

Packaging:

- cartons
- weight of pack 13 kg
- 3,16 m² (10 boards per packaging)

ELASTIC FACADE PLANK

Decorative, highly-elastic imitation of facade plank. Facade plank in white, for painting with LAZUR acrylic 1003 with reinforcing mesh. Thanks to the thinness of the plank, it can be covered with decorative thin-layer plaster. A plank must be pasted with special ready adhesive 111.

- dimensions of plank: 1980 mm x 160 mm x 3 mm
- area of 1 item: 0,312 m²

Packaging:


- cartons
- weight of pack 13 kg
- 3,16 m² p(10 boards per packaging)

REINFORCING MESH



Reinforcing mesh of fibreglass. It is used for creating a base coat in KREISEL thermal insulation systems. Alkaliproof.

- specific weight: approx. 145 g/cm² or 160 g/cm²
- size of mesh: 4x4 mm
- length of roll: 50 m
- width of roll: 1,1 m
- coverage: 1 m per 1 m²
- efficiency: 1 m²/ roll



Dimension:

- 55 m², 145 g/m²
- 55 m², 160 g/m²

SOCLE STRIP



Starter strip together with a socle profile used in TURBO thermal insulation systems. For systems with styrofoam and mineral wool. Protects the lower edge of a thermal insulation system. Made of durable PVC.

- width of strip: 55 mm, 100 mm
- width of profile: 50 mm, 100 mm
- length: 2,5 m



Starter strip:

- 2,5 m, 55 mm
- 2,5 m, 100 mm

Socle profile:

- 2,5 m, 50 mm
- 2,5 m, 100 mm

PVC CORNER WITH REINFORCING MESH / ALUMINIUM



Intended for protection of corners of buildings against damage, makes it possible to extend corners evenly. It may be used for styrofoam and mineral wool. Waterproof and freezeproof.

- length: 2,5 m



Dimension:

- 2,5 m
- 50 pcs per carton

DRIP STRIP



Strip intended for protection of walls against leaking. Creates rainwater breaks. Used for styrofoam and mineral wool. Ensures durable and elastic finishing of horizontal edges of facade. Made of PVC and mesh of glass fibre.

- length: 2,5 m



Dimension:

- 2,5 m
- 25 pcs per carton


EJOT TRIO

Mechanical coupling for TURBO thermal insulation systems




EJOT TRIO is a universal coupling, driven into a substrate to mechanically mount thermal insulation materials (EPS, XPS, hard mineral wool, lamella) to a wall. It is characterized by universality (one sleeve and three types of pivot). It is intended for beds of A type (e.g.: ordinary concrete), B (e.g.: ceramic full brick or silicate full brick), C (e.g.: silicate cored hollow brick and ceramic cavity hollow brick) and E (cellular concrete). One length of the coupling for use with different thicknesses of thermal insulation. Its adaptable anchoring zone makes it possible to adapt the pin to the type of wall.

- diameter of coupling sleeve: 10 mm
- diameter of plate: 60 mm
- minimum depth of mounting opening drilled: 35 mm (65 mm)
- minimum depth of anchoring: 30 mm (60 mm)




Type	Anchoring depth	Quantity in packaging
Plug with plastic stem		
TRIO TT 160	90-120 mm	200 pcs
TRIO TT 180	110-140 mm	150 pcs
TRIO TT 200	130-160 mm	150 spcs
TRIO TT 220	150-180 mm	100 spcs
Plug with plastic-sprayed steel stem		
TRIO TO 160	90-120 mm	200 pcs
TRIO TO 180	110-140 mm	150 pcs
TRIO TO 200	130-160 mm	150 pcs
TRIO TO 220	150-180 mm	100 spcs
TRIO TO 260	190-220 mm	100 pcs
TRIO TO 300	230-260 mm	100 pcs
Plug with plastic-sprayed steel stem		
TRIO TG 160	90-120 mm	200 pcs
TRIO TG 180	110-140 mm	150 pcs
TRIO TG 200	130-160 mm	150 pcs
TRIO TG 220	150-180 mm	100 pcs

BALCONY AND TERRACE SYSTEM



Specialist system for comprehensive installation of ceramic covering on a terrace or balcony slab. It is intended for new and renovated objects. The used components are resistant to thermal stress and changeable weather conditions.




Composition:

- GIGA CONCRETE 440, GROUT 420
- Primer: GRUNTOLIT-SG 302, EXPERT 5
- Balcony profile K30
- WATERPROOFING INSULATIONS: AQUASZCZEL 820, FOLBIT Extra 805
- Tile adhesives: KAMLEP PLUS 108, EXPERT 3, EXPERT 4, GEL ADHESIVE 2, GEL ADHESIVE 4
- Grouts: NANOTECH GROUT 730, SILICONE NANOTECH 720
- Balcony profile K30
- Connector L30
- Bumper OP 30
- Corner 90 to the balcony profile

ANTI-MOULD SYSTEM




Proven solution for cleaning and renovating biologically infected facades. Used on thin-layer plasters, coats of facade paints, concretes and other mineral beds. It is characterised by high effectiveness.




Composition:

- SEPTOBUD 1008
- GRUNTOLIT-SO 305
- Paints: SILICON 003, SISI 004, NANOTECH 006, BIOPAINT 008, ECOPAINT 009

TURBO-WG GARAGE SYSTEM



Thermal insulation system for ceilings above non-heated rooms and garage ceilings. It is based on mineral wool and special STRUCTURAL PAINT 071. It does not require mechanical mounting. This system is mainly characterised by high economy, it is a safe solution in all conditions.



Composition:

- LEPSTYR-WG 231
- TYNKOLIT G-SA 342
- STRUCTURAL PAINT 071

Paints

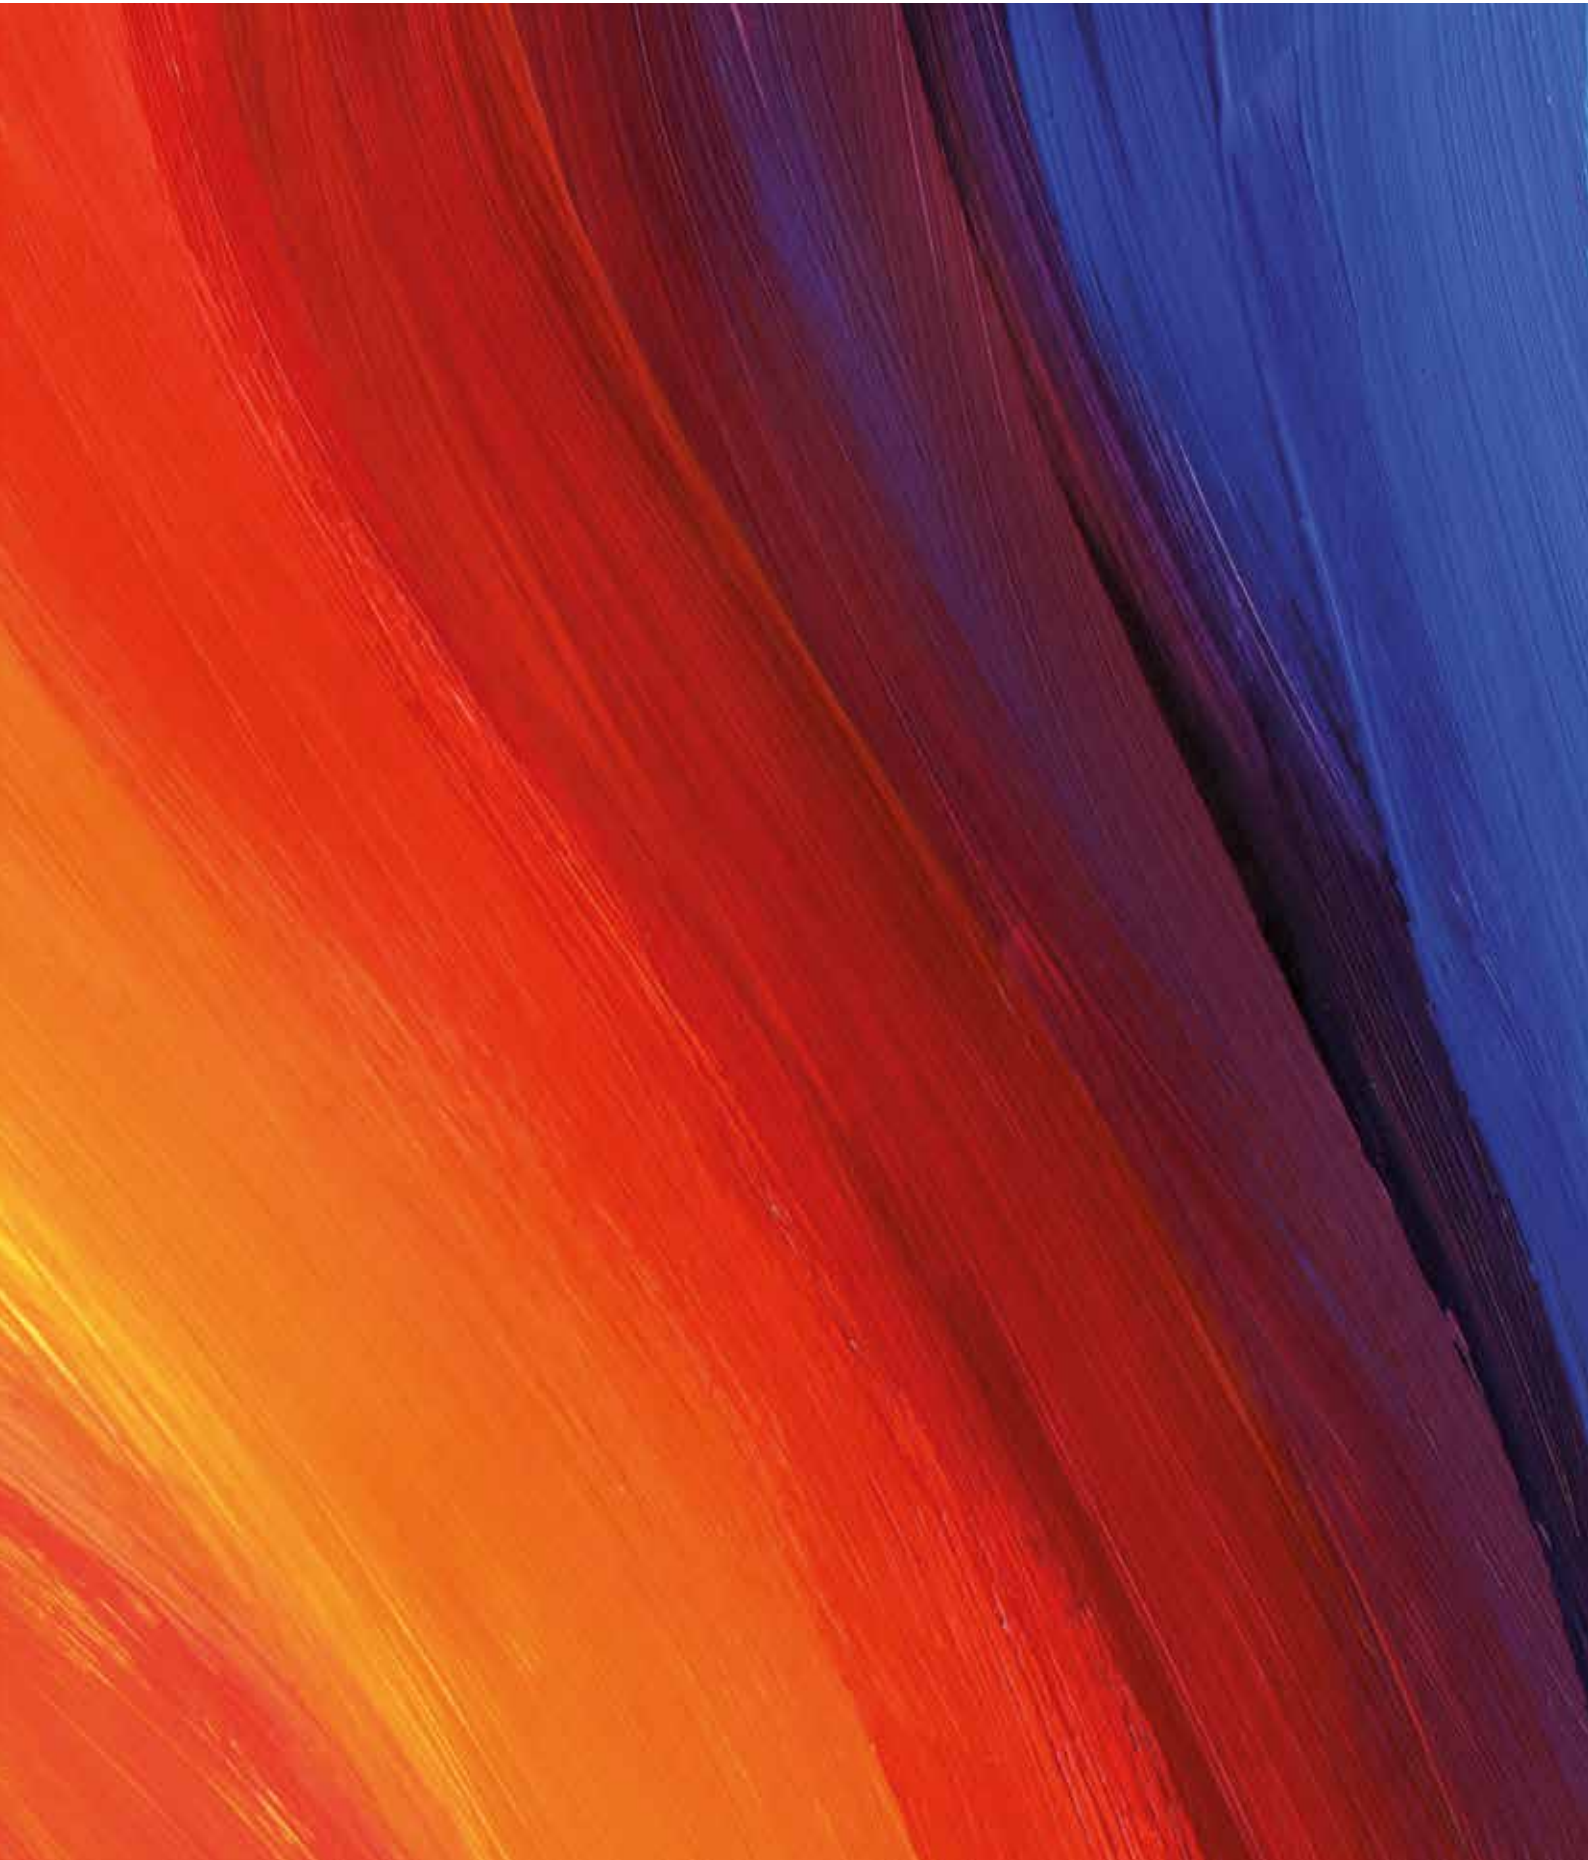


Table 7. Properties of outdoor paints

	 ACRYLIC PAINT 001	 SILICATE PAINT 002	 SILICONE PAINT 003	 SISI PAINT 004	 NANOTECH PAINT 006	 ELASTIC PAINT 007	 BIO PAINT 008	 ECO PAINT 009
Coverage	● ●	● ●	● ●	● ●	● ●	●	● ●	● ●
Coating quality	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
Resistance to washing	● ●	● ●	● ● ●	● ●	● ● ●	● ● ●	● ● ●	● ●
Resistance to scrubbing	● ● ●	● ●	● ● ●	● ●	● ● ●	● ● ●	● ● ●	● ●
Vapour permeability	●	● ● ●	● ● ●	● ● ●	● ● ●	●	● ● ●	● ● ●
Resistance to weather conditions	● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
Resistance to biological aggression	●	● ●	● ● ●	● ●	● ● ●	● ●	● ● ●	● ● ●
Resistance to soiling	●	● ●	● ● ●	● ●	● ● ●	● ● ●	● ● ●	● ● ●
Scratch bridging	●	●	●	●	●	● ● ●	●	●
Frost resistance	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
Water resistance	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
Indoor application	yes	yes	yes	yes	yes	yes	yes	yes
Outdoor application	yes	yes	yes	yes	yes	yes	yes	yes

● ● ● High ● ● Good ● Weak

PRIMER PAINT 018

NEW

Paint for bottom painting of substrate



Specialist acrylic paint with increased coverage for basecoat painting of a substrate before the application of a coloured topcoat paint. It evens out the substrate colour. Ideal before application of intense colours. After drying up, it is waterproof and freezeproof. Available in white or tinted in colour of facade paint. For all types of paints.

- drying up time of coating: ca. 12 hours
- bulk density: ca. 1,60 g/cm³
- consumption: ca. 0,20 l/m² per layer
- coverage: up to 5,0 m² /1l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 632 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 775 kg

ACRYLIC PAINT 001

Facade paint for traditional substrate



Ecological paint for decorative painting of substrates such as cement-lime, mineral plasters and plaster boards. High coverage, for application inside and outside buildings.

- diffusion factor μ : ≤ 13000
- drying up time of coating: ca. 12 hours
- consumption: ca. 0,15-0,30 l/m² per layer
- coverage: up to 100,0 m²/bucket 15 l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 632 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 775 kg

SILICATE PAINT 002

Siliceous facade paint for mineral substrate



Facade paint for mineral and renovation plasters, ideal for renovation of historic buildings. Highly vapour permeable, perfectly binds substrate. Ecological paint for painting cement-lime, lime, mineral plasters and plasterboard substrates. High coverage. For application inside and outside buildings.

- surface absorption coefficient: $< 0,46 \text{ kg}/(\text{m}^2/\text{h})$
- relative diffusion resistance: ca. 0,03 m
- drying up time of coating: ca. 12 hours
- consumption: ca. 0,15-0,30 l/m² per layer
- coverage: up to 100,0 m²/bucket 15 l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 632 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 775 kg

Exterior paints

KREISEL®

SILICONE PAINT 003

Facade silicone paint



Easily washable facade paint, ideal for all mineral substrates (cement-lime, lime plasters, concretes) and thermal insulation systems. Especially recommended for renovation of facades and historic buildings. Self-cleaning properties. Vapour permeable, resistant to UV and high coverage.

- diffusion factor μ : ≤ 920
- drying time of coating: ca. 12 hours
- consumption: ca. 0,15-0,30 l/m² per layer
- coverage: up to 100,0 m²/bucket 15 l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 632 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 775 kg

SISI PAINT 004

Facade silicate-silicone paint



Universal facade paint for all mineral substrates and thermal insulation systems. Especially recommended for substrates exposed to impact of environmental factors. Vapour permeable, washable with high coverage, for application inside and outside buildings.

- diffusion factor μ : ≤ 1450
- drying time of coating: ca. 12 hours
- consumption: ca. 0,15-0,30 l/m² per layer
- coverage: up to 100,0 m²/bucket 15 l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 648 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 795 kg

NANOTECH PAINT 006

Nano-silicone facade paint



Specialist facade paint with self-cleaning properties, ideal for all mineral substrates (cement-lime, cement plasters, concretes), thermal insulation systems and for renovation of historic buildings. Especially recommended for renovation of facades. Highly hydrophobic, easily washable, resistant to UV with high coverage. Intended for interiors and exteriors.

- diffusion factor μ : ≤ 1630
- drying time of coating: ca. 12 hours.
- consumption: ca. 0,15-0,30 l/m² per layer
- coverage: 100,0 m²/bucket 15 l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 632 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 775 kg

ELASTIC PAINT 007

Elastic silicone paint bridging shrinkable cracks



Specialist, durable, elastic facade paint for cracked places. Intended for painting decorative, cement-lime plasters and concretes. For renovation of facades. Vapour permeable, easily washable, resistant to scrubbing and highly resistant to UV.

- diffusion factor μ : ≤ 20000
- drying up time of coating: ca. 12 hours
- it bridges scratches up to 0,5 mm
- consumption: ca. 0,20-0,30 l/m² per layer
- coverage: up to 75,0 m²/bucket 15 l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 632 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 775 kg

BIOPAINT 008

Polysilicone facade paint resistant to biological growth



Innovative facade paint with the highest biological protection. Thanks to using the BIO PRUF system it is an ideal solution for places exposed to algae, mildew fungi growth (near forests, parks and large bodies of water). Used for painting all mineral, concrete beds and decorative plasters of all types. Vapour permeable, easily washable, resistant to scrubbing, elastic and highly hydrophobic.

- diffusion factor μ : ≤ 20000
- drying up time of coating: ca. 12 hours
- it bridges scratches up to 0,5 mm
- consumption: ca. 0,20-0,30 l/m² per layer
- coverage: up to 75,0 m²/bucket 15 l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 632 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 775 kg


ECO PAINT 009

Ecological facade paint



Innovative paint, based on ecological polymeric adhesives, natural fillers with the ECO PROTECT biological protection system based on active silver. It does not contain biocides. Intended for painting facades and interiors. It is appropriate for application on different kinds of thin-layer plasters, concrete substrates, cement-lime substrates, gypsum and other mineral substrates. High quality of coating, with decreased absorptivity.

- diffusion factor μ : ≤ 850
- drying up time of coating: ca. 12 hours
- consumption: ca. 0,15-0,30 l/m² per layer
- coverage: up to 100 m²/bucket 15l



Bucket:

- 5 l
- 80 pcs per pallet
- pallet weight: 632 kg

- 15 l
- 33 pcs per pallet
- pallet weight: 775 kg

STRUCTURAL PAINT 071*Mineral paint for garage system*

Mineral structural paint for machine-made decorative, white coating in thermal insulation system of garage ceilings TURBO-WG. Highly vapour permeable. Impact resistant.

- impact resistance: > 3 J
- bulk density: ca. 1,20 g/cm³
- grain size: 1,0 mm
- consumption ca: 1,3-3,0 kg m²
- coverage: up to 19,0 m²/bag 25 kg

**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

PAINT PROFESSIONAL 013

NEW
Developer paint for spray painting


Super white paint based on water dispersion of acrylic resin, intended for professional painting of interiors by pneumatic or hydrodynamic spraying. Perfect for painting fresh cement-lime or gypsum plasters.

- drying up time of coating: ca. 6 hours
- bulk density: ca. 1,45 g/cm³
- consumption: ca. 0,10 l/m² per layer
- coverage: up to 10,0 m² / 1 l


Bucket:

- 18 l
- 33 pcs per pallet
- pallet weight: 880 kg

ACRYLIC PAINT SUPER WHITE 012

Extra white paint for indoor applications


Paint for walls and ceilings in all rooms. Ideal for the first painting of finishes and gypsum plasters as well as cement-lime plasters. Good quality of coating and durability of whiteness, vapour permeable.

- drying up time of coating: ca. 6 hours
- bulk density: ca. 1,45 g/cm³
- consumption: ca. 0,10 l/m² per layer
- coverage: up to 10,0 m² / 1 l


Bucket:

- 10 l
- 33 pcs per pallet
- pallet weight: 501 kg

- 18 l
- 33 pcs per pallet
- pallet weight: 880 kg

INTERIOR PAINT colour 014

Interior acrylic paint with high quality, resistant to abrasion


High-quality acrylic paint for painting interiors. Ecological, non-drip, resistant to abrasion and scrubbing. With high quality of coating and high spreading rate. Intended for plasters, plasterboards and finishes.

- drying up time of coating: ca. 6 hours
- bulk density: ca. 1,42 g/cm³
- consumption: ca. 0,10 l/m² per layer
- coverage: up to 10,0 m² / 1 l


Bucket:

- 2,5 l
- 100 pcs per pallet
- pallet weight: 417 kg

- 5 l
- 80 pcs per pallet
- pallet weight: 654 kg

- 10 l
- 33 pcs per pallet
- pallet weight: 541 kg

LATEX PAINT 011

Mat, high-quality interior paint, resistant to scrubbing.



The highest-quality paint for walls and ceilings in residential, public and industrial rooms as well as health care buildings (consulting-rooms, operating rooms etc.). It is characterised by high quality of coating and high spreading rate. Non-drip. Used on plasters, plaster-boards and finishes.

- drying time of coating: ca. 2 hours
- bulk density: ca. 1,41 g/cm³
- consumption: ca. 0,080 l/m² per layer
- coverage: up to 12,5 m² / 1 l



Bucket:

- 2,5 l
- 100 pcs per pallet
- pallet weight: 389 kg
- 5 l
- 80 pcs per pallet
- pallet weight: 610 kg
- 10 l
- 33 pcs per pallet
- pallet weight: 504 kg

Table 8. Properties of indoor paints

	 LATEX PAINT 011	 ACRYLIC PAINT 012	 PAINT PROFESSIONAL 013	 INTERIOR PAINT COLOR 014
Coating quality	● ● ●	● ●	● ●	● ● ●
Coverage	● ● ●	● ●	● ●	● ●
Dry abrasion resistance	● ● ●	● ●	● ●	● ● ●
Wet abrasion resistance	● ● ●	●	●	● ●
Resistance to scrubbing	● ●	●	●	● ●
Ease of painting	● ● ●	● ●	● ●	● ● ●
Possibility of dyeing	● ● ●	● ●	● ●	● ● ●

● ● ● very good ● ● good ● low ● none

Tile products



Table 9. The scope of application of tile adhesives


							
	TILE ADHESIVE 100 2in1	UNI MUTLI 101	MULTI 102	ELASTI MULTI 104	GRES MULTI 105	EXPRESS 106	DISPERSION ADHESIVE 111
Class	C1T	C1	C1T	C2TE	C2T	C2FT	D2E
Bathrooms and kitchens	●	●	●	● ●	● ●	● ●	● ●
Terraces and balconies	●	●	●	● ●	● ●	● ●	● ●
Plasters, cement screeds	●	●	●	● ●	● ●	● ●	● ●
Plaster-cardboard (drywall) panels	●	●	●	● ●	● ●	● ●	● ●
Terrazzo, old tiles, bottom-of-wall oil coatings	●	●	●	● ●	●	● ●	●
Floor, wall heating systems	●	●	●	● ●	● ●	● ●	● ●
Facades, thermal insulation systems	●	●	●	● ●	●	● ●	● ●
OSBs and chipboards	●	●	●	●	●	●	● ●

● ● Best solutions ● Allowed solutions ● Not recommended solutions

TILE ADHESIVE 100 2 in 1*Levelling-adhesive grout, C1T class*

Elasticised adhesive for applying wall and floor tiles, as well as for levelling indoor and outdoor groundworks. For bathrooms and kitchens. Can be applied on concrete, cement-lime plaster, cement screed, non-plastered walls or other groundworks guaranteeing good adhesion of cement grout. Suitable for applying gres tiles on indoor surfaces. Contains arming fibres.

- adhesive thickness: up to 30 mm
- foot traffic: after 24 hours
- grouting: after 48 hours
- adjustability time: up to 15 min.
- consumption: ca. 18 kg/m²/1 cm
- coverage: ca. 1,4 m²/bag/1 cm


**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

UNI MULTI 101*Indoor tile adhesive, C1 class*

Thin-layer mortar intended for applying ceramic tiles on non-deforming indoor groundworks, for applying to solid bases such as plaster and concrete inside rooms.

- adhesive thickness: up to 5 mm
- foot traffic: after 24 hours
- grouting: after 48 hours
- adjustability time: up to 10 min.
- consumption: avg ca. 5,0 kg/m²
- coverage: ca. 5,0 m²/bag


**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

MULTI 102*Basic, frost-proof adhesive, C1T class*

Thin-layer mortar intended for applying ceramic tiles on non-deforming indoor groundworks for applying to solid bases such as plaster and concrete inside and outside rooms. Thixotropic waterproof and frost-resistant.

- adhesive thickness: up to 5 mm
- foot traffic: after 24 hours
- grouting: after 48 hours
- adjustability time: up to 10 min.
- consumption: ca. 5,0 kg/m²
- coverage: ca. 5,0 m²/bag

**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


ELASTI MULTI Special 104

Elastic, universal adhesive, C2TE class



Elastic layer mortar intended for applying ceramic clinker, terracotta gres tiles. Perfect for terraces, balconies and bathrooms and kitchens. On non-deforming indoor groundworks, solid bases, such as plaster. Thixotropic mortar about extended opened time.

- adhesive thickness: up to 5 mm
- foot traffic: after 24 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: ca. 4,5 kg/m²
- coverage: 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


GRES MULTI 105

Elastic adhesive for gres, C2T class



Perfect for sticking all types of gres tiles and clinker. Very good for terraces, balconies, bathrooms and kitchens and for plaster and concrete with underfloor heating.

- adhesive thickness: up to 5 mm
- foot traffic: after 24 hours
- grouting: after 48 hours
- adjustability time: up to 20 min.
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


EXPRESS 106

Quick-setting, elastic adhesive for all types of tiles, C2FT class



Intended for quick application of all tiles (clinker, terracotta gres tiles) Perfect for corridors, shop areas and terraces, balconies. Bathrooms, plaster and concrete with underfloor heating, liquid foils, sealing mortars and old facings.

- adhesive thickness: up to 5 mm
- foot traffic: after 4 hours
- grouting: after 4 hours
- adjustability time: up to 15 min.
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

READY-TO-USE ADHESIVE FOR TILES 111

Highly flexible dispersion adhesive, D2E class



Multifunctional, ready-to-use adhesive for ceramic, gypsum, stone tiles, etc. class D2E. Perfect for difficult bases, such as OSB boards. For use in bathrooms with underfloor heating. For use on plaster or concrete, liquid foils, sealing mortars and old facings. Waterproof and frost-resistant. For the assembly of decorative tiles and inside elements and outside.

- adhesive thickness: up to 5 mm
- foot traffic: after 24 hours
- grouting: after 72 hours
- adjustability time: up to 30 min.
- consumption: ca. 3,0 kg/m²
- coverage: 5,0 m²/bucket

Bucket:

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg
- 15 kg
- 33 pcs per pallet
- pallet weight: 542 kg




Table 10. The scope of application of tile adhesives

	 EXPERT 1	 EXPERT 2	 EXPERT 2 WHITE	 EXPERT 3	 EXPERT 4
Class	C1T	C2TE	C2TE	C2TES1	C2TES2
Bathrooms and kitchens	●	● ●	● ●	● ●	● ●
Terraces and balconies	●	●	●	● ●	● ●
Plasters, cement screeds	●	● ●	● ●	● ●	● ●
Plaster-cardboard (drywall) panels	●	●	●	● ●	● ●
Terrazzo, old tiles, bottom-of-wall oil coatings	●	●	●	● ●	● ●
Floor, wall heating systems	●	● ●	● ●	● ●	● ●
Facades, thermal insulation systems	●	●	●	● ●	● ●
OSBs and chipboards	●	●	●	●	● ●

● ● Best solutions ● Allowed solutions ● Not recommended solutions


EXPERT 1

Freezeproof tile adhesive, C1T class



For fixing ceramic tiles to rigid substrates. For traditional substrates such as plasters, concretes, screeds and for plasterboards.

- adhesive thickness: up to 10 mm
- foot traffic: 24 hours
- grouting: after 48 hours
- adjustability time: up to 10 min.
- adhesion: $\geq 0,5$ MPa
- consumption: ca. $5,0 \text{ kg/m}^2$
- coverage: ca. $5,0 \text{ m}^2/\text{bag}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


EXPERT 2

Elastic gres tile adhesive, C2TE class



For fixing gres and ceramic tiles, terracotta and clinker tiles. For terraces and balconies, for bathrooms and kitchens. For substrates such as plasters, concretes, plasterboards, liquid foils and screeds - also with floor heating system.

- adhesive thickness: up to 10 mm
- foot traffic: 24 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: ca. $4,5 \text{ kg/m}^2$
- coverage: ca. $5,5 \text{ m}^2/\text{bag}$




Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


EXPERT 2 WHITE

White, elastic adhesive for all types of tiles, C2TE class



For fixing tiles of natural stone as well as gres, ceramic, terracotta and clinker tiles. For terraces and balconies, for bathrooms and kitchens. For substrates such as plasters, concretes, screeds - also with floor heating system, plasterboards, liquid foils and sealing mortars.

- adhesive thickness: up to 10 mm
- foot traffic: 24 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: ca. $4,5 \text{ kg/m}^2$
- coverage: ca. $5,5 \text{ m}^2/\text{bag}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


EXPERT 3

Deformable adhesive for all types of tiles, **C2TES1** class



For all types and formats of tiles: gres, ceramic, terracotta and clinker. Intended for terraces, balconies, for swimming pools and bathrooms as well as for difficult substrates such as bases with floor heating system, old ceramic covering, terrazzo, chipboards and oil dados. It contains reinforcing fibres and rubber flour.

- adhesive thickness: up to 10 mm
- foot traffic: 24 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


EXPERT 4

Highly-deformable white adhesive for all types of tiles, **C2TES2** class



Intended for difficult substrates such as bases with floor heating system, old ceramic covering, terrazzo, chipboards, OSBs and oil dados. Intended for all types and formats of tiles. Ideal for natural stone and for terraces, balconies, for swimming pools and saunas. It contains reinforcing fibres and rubber flour.

- adhesive thickness: up to 10 mm
- foot traffic: 24 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: ca. 5,0 kg/m²
- coverage: ca. 5,0 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

GEL ADHESIVE 1 elastified


NEW

Quick-setting, elastic tile adhesive, **C2FT** class



Intended for quick application of all tiles (clinker, terracotta gres tiles) Perfect for corridors, shop areas and terraces, balconies. Into bathrooms to plaster and concrete with underfloor heating, liquid foils, sealing mortars and old facings.

- adhesive thickness: 2 - 15 mm
- foot traffic: after 24 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: avg ca. 4,5 kg/m²
- coverage: ca. 5,0 m²/ bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


GEL ADHESIVE 2 with nanoparticles

Elastic tile adhesive with nanoparticles, **C2TE** class



Modern fine-grained glue for all kinds and formats of tiles. For application on difficult substrates such as oil dados, old tiles, underfloor heating, terraces and balconies. Easy to apply, contains supplements which improve working properties. Add water to desired consistency.

- adhesive thickness: up to 15 mm
- foot traffic: after 12 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

- 5 kg
- 4 pcs per carton
- 128 pcs per pallet
- pallet weight: 670 kg

GEL ADHESIVE 3 white


NEW

White, elastic gel adhesive for all types of tiles, **C2TE** class



Modern, fine-grained adhesive for fixing all types of stone, concrete, gypsum tiles as well as: ceramic, gres tiles. Used on difficult substrates: oil dados, old ceramic tiles, floor heating. On terraces and balconies. White colour prevents discolouration. Easy application, highly adhesive, contains additives improving working properties.

- adhesive thickness: up to 15 mm
- foot traffic: after 12 hours
- grouting: after 36 hours
- adjustability time: up to 30 min.
- consumption: avg ca. 4,5 kg/m²
- coverage: ca. 5,0 m²/ bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

GEL ADHESIVE 4 deformable


NEW

Deformable, grey gel adhesive for all types of tiles, **C2TE S1** class



Modern, fine-grained adhesive for fixing mainly large tiles, quartz sinters and other types of ceramic, stone, concrete, gypsum tiles. Used on difficult substrates: oil dados, old ceramic tiles, floor heating. For terraces, balconies and facades as well as for swimming pools. It is characterised by high durability at joints and it compensates for stress between the tile and a substrate.

- adhesive thickness: 2-15 mm
- foot traffic: after 12 hours
- grouting: after 36 hours
- adjustability time: up to 30 min.
- consumption: avg ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/ bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

Table 11. The scope of application of tile adhesives

	 GEL ADHESIVE 1 ELASTIFIED	 GEL ADHESIVE 2 WITH NANOPARTICLES	 GEL ADHESIVE 3 WHITE	 GEL ADHESIVE 4 DEFORMABLE
Class	C1TE	C2TE	C2TE	C2TES1
Bathrooms and kitchens	●	● ●	● ●	● ●
Terraces and balconies	●	●	●	● ●
Plasters, cement screeds	●	● ●	● ●	● ●
Plaster-cardboard (dry-wall) panels	●	●	●	● ●
Terrazzo, old tiles, bottom-of-wall oil coatings	●	●	●	● ●
Floor, wall heating systems	●	● ●	● ●	● ●
Facades, thermal insulation systems	●	●	●	● ●
OSBs and chipboards	●	●	●	●

● ● Best solutions ● Allowed solutions ● Not recommended solutions

How to calculate the required amount of expansion grout?

The needed volume of cement joint mortar shall be determined by assuming the consumption rate of 2 g of dry mixture per 1 cubic centimetre of joint volume. This value takes into account approx. 20% of mortar loss for smoothing. Mortar demand shall be calculated by multiplying the consumption coefficient (see Table 12) by the joint length per 1 sq. m. of the surface (see Table 13) and by the area of the joined covering or lining.

Table 12. The average consumption of dry mortars for expansion joints in grams per 1 metre of joint length (assuming the consumption of 2 g/cubic centimetre)

Joint width mm	Joint depth, mm										
	5	6	7	8	9	10	11	12	13	14	15
Consumption coefficient, g/m											
2	20	24	28	32	36	40	44	48	52	56	60
3	30	36	42	48	54	60	66	72	78	84	90
4	40	48	56	64	72	80	88	96	104	112	120
5	50	60	70	80	90	100	110	120	130	140	150
6	60	72	84	96	108	120	132	144	156	168	180
7	70	84	98	112	126	140	154	168	182	196	210
8	80	96	112	128	144	160	176	192	208	224	240
9	90	108	126	144	162	180	198	216	234	252	270
10	100	120	140	160	180	200	220	240	260	280	300
11	110	132	154	176	198	220	242	264	286	308	330
12	120	144	168	192	216	240	264	288	312	336	360
13	130	156	182	208	234	260	286	312	338	364	390
14	140	168	196	224	252	280	308	336	364	392	420
15	150	180	210	240	270	300	330	360	390	420	450

Table 13. Joint length per 1 sq. m. of surface

Tile dimensions [cm]	Joint length [m/m²]	Tile dimensions [cm]	Joint length [m/m²]	Tile dimensions [cm]	Joint length [m/m²]
5 × 5	38,5	15 × 24,5	10,6	25 × 40	6,4
6 × 24,5	20,0	20 × 20	9,9	29,7 × 29,7	6,7
6,5 × 24,5	18,9	20 × 25	8,9	30 × 30	6,6
10 × 10	19,6	20 × 30	8,2	30 × 50	5,2
10 × 20	14,7	20 × 33,3	7,9	30 × 60	4,9
11,5 × 24	12,6	22,5 × 30	7,7	33,3 × 33,3	5,9
12 × 24,5	12,1	24 × 24	8,2	35 × 35	5,6
15 × 15	13,2	25 × 25	7,9	40 × 40	4,9
15 × 20	11,5	25 × 33,3	6,9	50 × 50	3,9
15 × 22,5	11,0	25 × 35	6,7	60 × 60	3,3


GROUT EPOXI 710

Epoxide pointing mortar, 1-10 mm



Mortar intended for pointing substrates which must meet high requirements for chemical and mechanical resistance e.g. swimming pools, industrial kitchens, sewage treatment plants and butcheries.

- foot traffic: after 24 hours
- compressive strength: ≥ 45 MPa
- chemical resistance: 35% sulphuric acid, 20% soda lye, 3% hydrochloric acid, 10% citric acid, 5% lactic acid
- classification according to PN-EN 13888:2010:RG
- coverage: for tile 30x30 cm and joint 4 mm - ca. 0,37 kg / m²



Bucket:

Grey, beige, white:

- 5 kg
- 96 pcs per pallet
- pallet weight: 330 kg


NANOTECH GROUT 730

Mortar for pointing with nanoparticles, 1-20 mm



Mortar based on nanotechnology intended for pointing wall and floor ceramic tiles, terracotta, gres, concrete tiles and tiles of natural and artificial stone not susceptible to discolouration. It is characterised by increased abrasion resistance. Colour table: page 130.

- foot traffic: after 6 hours
- compressive strength: ≥ 15 MPa
- flexural strength: $\geq 3,5$ MPa
- classification according to PN-EN: 13888:2010:CG2WA
- consumption: for tile 30x30 cm and joint 3 mm - ca. 0,45 kg/m²



Bag:

24 colours

- 2 kg
- 8 pcs per carton
- 240 pcs per pallet
- pallet weight: 542 kg

- 5 kg
- 4 pcs per carton
- 128 pcs per pallet
- pallet weight: 670 kg

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


SILVER GROUT 731

Specialist grout with nanoparticles of silver, 1-20 mm



Mortar intended for pointing all types of wall and floor tiles inside and outside buildings. Thanks to an addition of silver ions it is characterised by high resistance to biological growth. It makes it possible to obtain joints with low absorptivity with an effect of pearling. Colour table: page 130

- foot traffic: after 6 hours.
- compressive strength: ≥ 15 MPa
- flexural strength: $\geq 3,5$ MPa
- classification according to PN-EN: 13888:2010:CG2WA
- coverage: for tile 30x30 cm and joint 3 mm - 0,45 kg / m²



Bucket:

24 colours

- 2 kg
- 268 pcs per pallet
- pallet weight: 536 kg

SILICONE NANOTECH 720

Silicone sealing compound



Resistant to mildew fungi - compound for sealing couplings around wash-basins, baths, paddling pools and shower cubicles as well as for corner pointing of ceramic tiles, expansion joints, sealing pipes and connections with HW. Used as a universal sealing agent for filling slits between building materials and decorative elements.

Colour table: page 130

- time of complete hardening: 2 mm / 24 hours
- processing time: up to 25 min.
- resistance to temperatures: from -40°C to +180°C
- change of volume: ≤ 10%
- coverage: up to 16 m from a cartridge



Cartouches:

25 colours

- 280 ml
- 15 pcs per carton
- 1260 pcs per pallet
- weight carton: 4,2 kg
- pallet weight: 342 kg

Stone products



Table 14. Application of stone adhesives

	 KAMLEP PLUS 108	 FASADE STONE ADHESIVE 102K	 READY-TO-USE STONE ADHESIVE 111K	 GYPSUM STONE ADHESIVE 681
Base	cement	cement	cement	gypsum
Colour	white	grey	white	white
Class	C2TE	C1T	D2E	-
APPLICATION:				
Indoor	● ●	● ●	● ●	● ●
Outdoor	● ●	●	●	●
DECORATIVE STONE:				
Gypsum	●	●	● ●	● ●
Cement	● ●	● ●	● ●	●
Concrete	● ●	● ●	● ●	●
NATURAL STONE:				
Marble	● ●	●	● ●	●
Travertine	● ●	●	● ●	●
Granite	● ●	●	● ●	●

● ● Best solutions ● Allowed solutions ● Not recommended solutions


KAMLEP PLUS 108

White, elastic adhesive mortar for natural stone, C2TE class



Intended for applying tiles and calibrated natural stone panels (marble, limestone, sandstone, granite, etc.) both on rigid and deforming groundworks. Can also be used for applying all types of ceramic tiles (ceramic, clinker, gres), including large tiles. Intended for balconies and terraces, for humid rooms, to be applied on cement and anhydrite screed with floor heating.

- layer thickness: up to 15 mm
- foot traffic: after 18 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: avg ca. 4,5 kg/m²
- coverage: ca. 5,5 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


FASADE STONE ADHESIVE 102K

Freezeproof stone adhesive, C1T class



Freezeproof, basic cement adhesive for tiles of artificial stone: concrete, gypsum and of conglomerate. It is characterised by high bond strength and easy use. Ideal for interiors. Suitable for substrates of cement, cement-lime, gypsum plasters. Waterproof after hardening.

- layer thickness: up to 5 mm
- foot traffic: after 24 hours
- grouting: after min 48 hours
- adjustability time: up to 10 min.
- consumption: ca. 4,0 kg/m²
- coverage: ca. 3,0 m²/ bag



Bucket:

- 12 kg
- 33 pcs per pallet
- pallet weight: 604 kg


GYPSUM STONE ADHESIVE 681

Gypsum adhesive for stone tiles



Gypsum adhesive for gypsum tiles imitating stone, brick etc. It is characterised by very high bond strength and easy use. Ideal for interiors. Suitable for substrates of cement, cement-lime, gypsum plasters, for plasterboards.

- layer thickness: up to 10 mm
- grouting: after 24 hours
- adjustability time: up to 10 min.
- consumption: avg ca. 3,0 kg/m²
- coverage: ca. 4,0 m²/ bucket



Bucket:

- 12 kg
- 33 pcs per pallet
- pallet weight: 604 kg

NEW

NEW


READY-TO-USE STONE ADHESIVE 111K

NEW

Ready-to-use stone adhesive, D2E class

Specialist, ready-to-use adhesive for stone, concrete, gypsum tiles and tiles of stone conglomerate. Characterised by easy application and high bond strength on a wall. It is highly adhesive to difficult substrates such as OSBs, chipboards, plasterboards. For application inside and outside buildings. White. Ideal also for mosaic tiles.

- layer thickness: up to 5 mm
- foot traffic: 24 hours
- grouting: after 72 hours
- adjustability time: up to 30 min.
- consumption: avg ca. 3,0 kg/m²
- coverage: ca. 2,3 m²/ bucket

**Bucket:**

- 7 kg
- 80 pcs per pallet
- pallet weight: 604 kg

GROUT FOR FACADE STONE 702


NEW

Grout for facade stone

Mortar for pointing boards and tiles of artificial and natural facade stone. It is also suitable for clinker and other types of ceramic lining. Since it contains trass there is a smaller risk of salt efflorescence. It makes it possible to obtain joints with high stability of colour and bond strength. For application inside and outside rooms.

Colour table: page 130

- joint width: from 5 to 25 mm
- foot traffic: after 24 hours
- compressive strength: ≥ 15 MPa
- consumption: depends on size of tiles and joint width

**Bag:**

White, graphite, sand, light grey, grey, brick-red, brown, black:

- 5 kg
- 4 pcs per carton
- 128 pcs per pallet
- pallet weight: 1230 kg

Clinker products

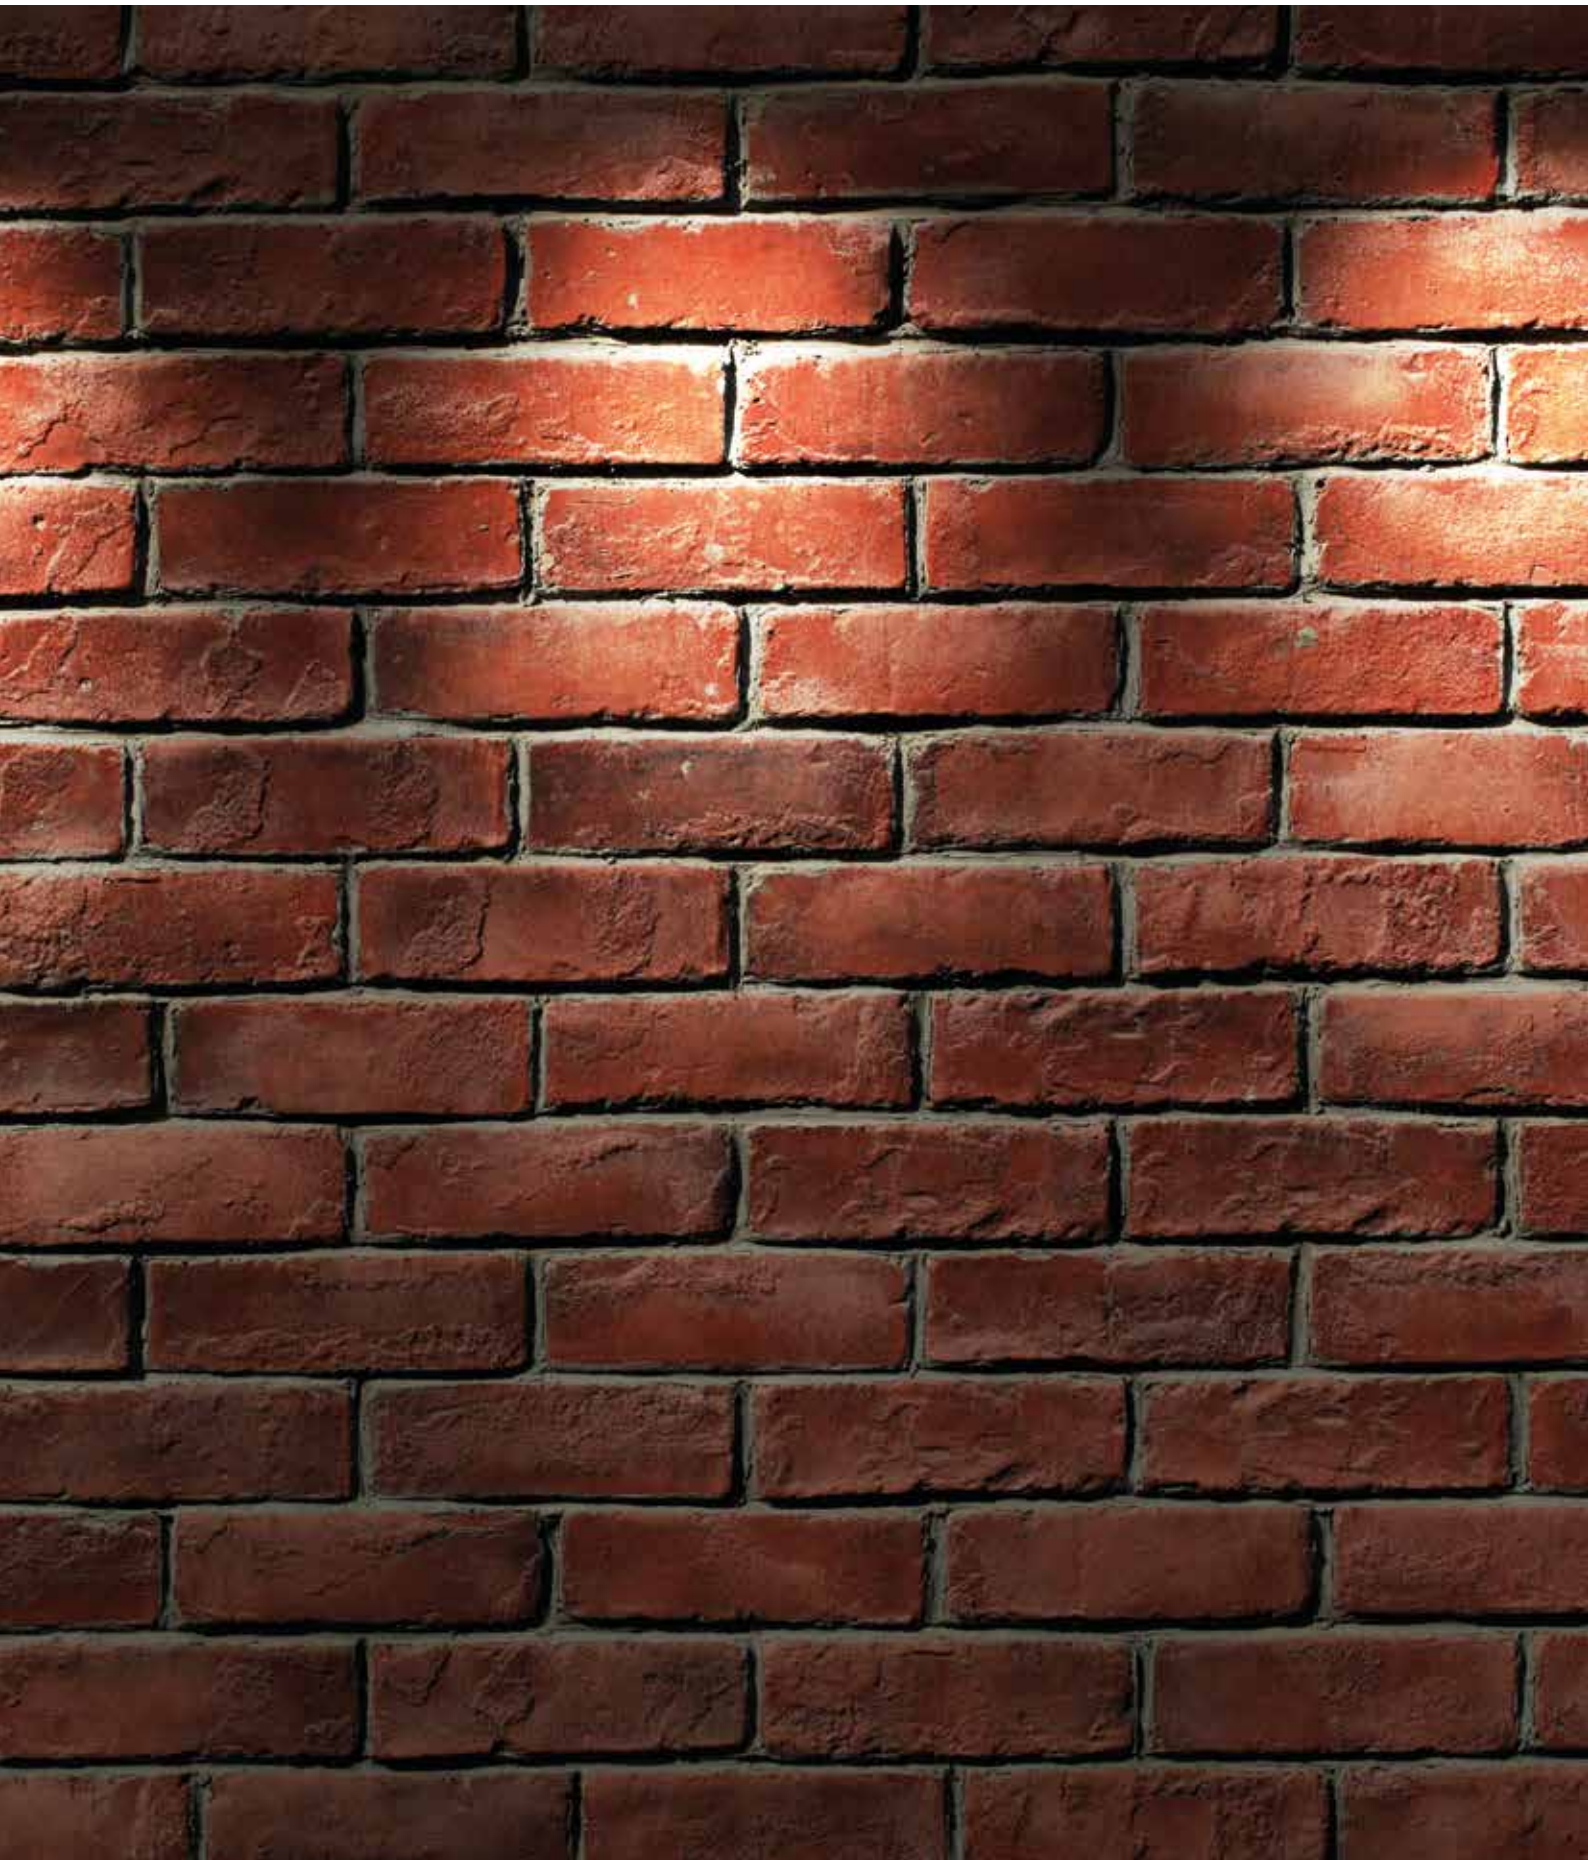


Table 15. Clinker products

	 POZMUR-KL NANO 130	 KLINKIER MULTI 112	 CLINKER GROUT 701	 FRONTA 1001
Colour	white, light grey, graphite, black, sand, brown, brick red	grey	white, light grey, graphite, black, sand, brown, brick red	Colourless
Intended use	Bricklayer bricks	Gluing tiles	Grouting bricks and tiles	Impregnation
Contains trass	●	●	●	Not applicable
Grain sizes	1,2 mm	0,5 mm	0,5 mm	Not applicable
Class	M10	C2TE	CG2A	Not applicable
APPLICATION:				
Indoor	●	●	●	●
Outdoor	●	●	●	●
Frost resistance	●	●	●	●

● YES ● NO

POZMUR-KL NANO 130

Masonry mortar with trass for clinker elements



Mortar with nanotechnology for full-joint laying of bricks and clinker obverse moulders without additional pointing. For application inside and outside during construction of walls and facades of clinker elements. It effectively decreases a risk of efflorescence.

Colour table: page 138

- compressive strength: M10
- flexural strength: $\geq 2,5$ MPa
- joint strength: $\geq 0,15$ N/mm²
- grain sizes: 0-2 mm
- consumption: wall thickness 25 cm - 110 kg/m²



Bag:

White, graphite, sand, light grey, grey, brick-red, brown, black:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


KLINKIER MULTI 112

Elastic adhesive for clinker tiles, C2TE class



Intended for fast adhesion of all tiles (clinker, terracotta gres tiles). Perfect for terraces, balconies, bathrooms and concrete with underfloor heating, liquid foils, sealing mortars and old facings. Thixotropic waterproof and frost-resistant.

- adhesive thickness: up to 5 mm
- foot traffic: after 24 hours
- grouting: after 48 hours
- adjustability time: up to 30 min.
- consumption: avg ca. 4,5 kg/m²
- coverage: ca. 2,1 m²/bucket



Bucket:

- 10 kg
- 55 pcs per pallet
- pallet weight: 740 kg

CLINKER GROUT 701


Specialist mortar with trass for pointing clinker covering, 5-20 mm



Mortar for pointing tiles, bricks, clinker moulders, wall and floor ceramic, glass and concrete tiles. Trass content in its composition reduces the risk of salt efflorescence. It makes it possible to obtain joints with high stability of colour and bond strength. For internal and external application.

Colour table: page 138

- foot traffic: after 24 hours
- compressive strength: $\geq 25,5$ MPa
- classification according to PN-EN: 13888:2010:CG2W
- consumption: for bricks 6,5x25 cm and joint 10 mm - ca. 3,2 kg/m²



Bag:

White, graphite, sand, light grey, grey, brick-red, brown, black:

- 10 kg
- 96 pcs per pallet
- pallet weight: 990 kg

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

FRONTA 1001

Impregnant for clinker



For maintenance and protection of natural stone, tiles, clinker bricks and products of building ceramics. It seals porous structures and hinders penetration of dirt, without causing gloss or creating a surface layer. Ensures rustic appearance of substrates. Waterproof and freezeproof, hydrophobic and vapour permeable.

- drying up time: depending of ambient temperature
- density: 0,08 g/cm³
- colour: colourless after drying
- consumption: ca. 0,08-0,12 l/m² depending on absorbency and structure of groundwork
- coverage: up to 12,5 m²/package



Metal container:

- 1 l
- 12 pcs per carton
- carton weight: 14 kg

Primers



Table 16. Properties of priming agents

									
	EXPERT 5	EXPERT 6	GRUNTOLIT-W 301	GRUNTOLIT-SG 302	GRUNTOLIT-SO 305	GRUNT POD GLADZIE 306	GRUNT BET 310	GRUNTOLIT-K 311	GRUNTOLIT-SK 313
Possibility of diluting	●	●	●	●	●	●	●	●	●
Colour after drying	Colourless	Colourless	Colourless	Colourless	Colourless	Blue	Red	Yellow	Green
Possibility of further works	4 h	12 h	24 h	24 h	24 h	24 h	24 h	12 h	24 h
To be applied under:									
Paints	●	●	●	●●	●●	●	●	●	●
Tile adhesives	●●	●●	●	●	●	●	●	●	●
Hydroinsulation systems	●●	●	●	●●	●	●	●	●	●
Cement screeds	●●	●	●	●●	●	●	●	●	●
Anhydrite screeds	●	●	●	●	●	●	●	●●	●●
Finish surfaces	●	●	●	●●	●	●●	●	●	●
Gypsum plasters	●	●	●	●	●	●	●●	●●	●●
Cement-lime plasters	●	●	●	●	●	●	●●	●	●

●● Best solutions ● Allowed solutions ● Not recommended solutions


GRUNTOLIT-W 301

Aqueous priming agent



Universal primer intended for levelling absorptivity, stabilisation and reinforcement of dusty substrates. It increases bond strength and facilitates application of paint coats, building mortars and tile adhesives.

- drying time: ca. 2-4 hours
- possibility of further works: after ca. 24 hours
- colour: colourless after drying
- consumption: ca. 0,05-0,30 l/m² depending on absorbency and structure of groundwork
- coverage: up to 100 m²/5 l



Plastic container:

- 1 l
- 12 pcs per carton
- carton weight: 13 kg

- 5 l
- 120 pcs per pallet
- pallet weight: 642 kg

- 20 l
- 30 pcs per pallet
- pallet weight: 648 kg

GRUNTOLIT-SG 302

Deeply penetrating priming agent



Deeply penetrating agent for priming absorptive substrates. Mainly used before interior or exterior paints and before creating finishes (gypsum, lime-cement, polymer), ceramic covering and wallpapers.

- drying time: ca. 2-4 hours
- possibility of further works: ca. 24 hours
- colour: colourless after drying
- consumption: ca. 0,05-0,30 l/m²
- coverage: up to 100 m²/5 l



Plastic container:

- 1 l
- 12 pcs per carton
- carton weight: 13 kg

- 5 l
- 120 pcs per pallet
- pallet weight: 642 kg

GRUNTOLIT-SO 305

Specialist priming agent under silicone and silicate paints



Priming agent, based on silicone resin for priming beds before painting with silicone paints (SO), silicate paints (SA) and silicate-silicone paints (SISI). It reduces and levels absorptivity, reinforces substrates, facilitates painting and increases bond strength of paint to substrates.

- drying time: ca. 2-4 hours
- possibility of further works: after ca. 24 hours
- colour: colourless after drying
- consumption: ca. 0,05-0,30 l/m²
- coverage: up to 100 m²/5 l



Plastic container:

- 5 l
- 120 pcs per pallet
- pallet weight: 642 kg

PRIMER UNDER FINISH COATS 306*Priming agent with quartz aggregate*

Priming agent under gypsum, dispersion, limestone or cement-limestone finish coats. It makes application of finish coats easier and improves bond strength to substrate, reduces and levels its absorptivity, without decreasing vapour permeability. Resistant to alkaline compounds.

- drying time: ca. 4 hours
- possibility of further works: after ca. 24 hours
- colour: after drying BLUE
- consumption: ca. 0,20-0,30 kg/m²
- coverage: up to 75 m²/15 kg

**Bucket:**

- 15 kg
- 33 pcs per pallet
- pallet weight: 542 kg

GRUNTOBET 310

Primer under gypsum, cement-lime plasters



Primer intended for final preparation of concrete, reinforced-concrete and mineral substrates before application of gypsum, cement-lime plasters. It contains quartz aggregate increasing bond strength of layers applied. It improves bond strength of plasters, facilitates their application as well as levels and reduces absorptivity of beds.

- drying time: ca. 12 hours
- possibility of further works: after ca. 24 hours
- colour: after drying RED
- consumption: ca. 0,25-0,35 kg/m²
- coverage: up to 80 m²/20 kg



Bucket:

- 20 kg
- 24 pcs per pallet
- pallet weight: 522 kg

GRUNTOLIT-K 311

Concentrated primer under plasters, gypsum adhesives and anhydrite screeds



Highly concentrated priming agent for final preparation of substrates before application of plasters, gypsum adhesives and anhydrite screeds. Used for priming all extensively absorptive and weakened substrates.

- drying time: ca. 2-4 hours
- possibility of further works: after ca. 12 hours
- colour: after drying YELLOW
- dilution: from 1:1 to 1:5
- coverage: from 0,08 kg/m² in undiluted state
- coverage: up to 200 m²/15 kg



Bucket:

- 15 kg
- 24 pcs per pallet
- pallet weight: 402 kg


GRUNTOLIT-SK 313

Concentrated primer under gypsum plaster and anhydrite screeds



Concentrated priming agent for final preparation of substrates before application of plasters, gypsum adhesives and anhydrite screeds. It reduces and levels absorptivity of substrates, facilitates plastering, screeds and application of gypsum adhesives.

- drying time: ca. 2-4 hours
- possibility of further works: after ca. 24 hours
- colour: after drying GREEN
- dilution: from 1:1 to 1:3
- consumption: from 0,10 kg/m² in undiluted state
- coverage: up to 150 m²/15 kg



Bucket:

- 15 kg
- 24 pcs per pallet
- pallet weight: 402 kg



Machine-sprayed hard gypsum plaster 651T




reinforced with fibers



easy to work with



ensures a healthy microclimate



higher surface strength

Waterproof insulation systems



Table 17. Properties and application areas of waterproof insulation systems

				
	FOLBIT 800	FOLBIT EXTRA 805	BUDOSZCZEL-H 810	AQUASZCZEL 820
Insulation type	fluid foil	fluid foil	single-component, cement-polymer	double-component, cement-polymer
Temperature of use	+5 °C do +25 °C			
Drying time of 1 layer	approx. 3 hours	approx. 3 hours	approx. 4 hours	approx. 5 hours
Possibility of further works	min. 18 hours of drying	min. 18 hours of drying	min. 3 hours of drying	min. 3 hours of drying
Min. number of applied layers	2			
Minimal layer thickness	1,0 mm	1,0 mm	2,0 mm	2,0 mm
Resistance to water under pressure	≥ 0,5 MPa	≥ 0,5 MPa	≥ 0,5 MPa	≥ 0,5 MPa
Frost resistance	NO	YES	YES	YES
Adhesive strength to concrete	≥ 0,5 MPa	≥ 0,5 MPa	≥ 1,0 MPa	≥ 1,5 MPa
Scratch bridging	up to 2,5 mm	up to 0,75 mm	up to 0,75 mm	up to 1,5 mm
Application areas				
Kitchens, bathrooms	● ●	● ●	●	●
Sealing of old ceramic linings	●	●	● ●	●
Industrial kitchens and laundries, showers without shower tubs.	●	●	● ●	●
Industrial premises	●	●	●	● ●
Balconies	●	● ●	● ●	● ●
Terraces	●	● ●	●	● ●
Swimming pools	●	●	●	● ●
Underground parts of buildings				
a) horizontal insulation systems	●	●	●	● ●
b) vertical insulation systems				
- light	●	●	●	● ●
- medium	●	●	●	● ●
- heavy	●	●	●	● ●

● ● Best solution ● Allowed solutions ● Not recommended solutions

FOLBIT 800

Internal liquid foil



Single-component, ready for use liquid compound. For internal use with waterproof insulation systems on substrates such as concrete, cement-lime plasters, gypsum and screed. After having dried up, it forms a seamless, durable and elastic insulation coating.

- watertightness with pressure of 0,5 MPa
- laying floor tiles: after 18-24 hours
- colour: blue
- consumption: ca. 1,40 kg/m² / 1 mm layer thickness
- coverage: ca. 5 m²/1 mm / 7 kg



Bucket:

- 4 kg
- 100 pcs per pallet
- pallet weight: 444 kg

- 7 kg
- 80 pcs per pallet
- pallet weight: 605 kg

- 21 kg
- 33 pcs per pallet
- pallet weight: 740 kg


FOLBIT EXTRA 805

External liquid foil



Single-component, ready for use liquid compound. For use inside and outside with water-proof insulation systems on difficult substrates such as terraces and balconies etc. After having dried up, it forms a highly water tight coating with strong adhesion to the substrate.

- watertightness with pressure: 0,5 MPa
- laying floor tiles: after 18-24 hours
- colour: green
- consumption: ca. 1,40 kg/m² / 1 mm layer thickness
- coverage: ca. 5 m²/1 mm / 7 kg



Bucket:

- 4 kg
- 100 pcs per pallet
- pallet weight: 444 kg

- 7 kg
- 80 pcs per pallet
- pallet weight: 605 kg

- 21 kg
- 33 pcs per pallet
- pallet weight: 740 kg

BUDOSZCZEL-H 810

Single-component waterproof mortar for balconies



Mortar for waterproof insulation systems in rooms with increased humidity. For sealing the surface of containers and swimming pools, insulating external walls and protecting terraces and balconies. It bridges scratches up to 0,75 mm.

- minimum number of layers: 2
- layer thickness: 2-5 mm
- drying time: ca. 4 hours
- suitability-for-use time after mixing: 60 min.
- consumption: ca. 1,5 - 1,7 kg/m² for thickness of 1 mm
- coverage: ca. 16 m²/1 mm layer thickness



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

AQUASZCZEL 820

Double-component, cement-polymer waterproof mortar



Intended for underground waterproof insulation systems in areas which have contact with ground water and water basins, swimming pools, terraces and balconies. Used for insulating agricultural buildings: animal waste tanks, cesspools etc. It bridges scratches up to 1.5 mm.

- minimum number of layers: 2
- layer thickness: 2-4 mm
- drying time: ca. 4 hours
- suitability-for-use time: up to 60 min.
- consumption: ca. 1,5-1,7 kg/m²/1 mm
- coverage: ca. 16 m²/1 mm layer thickness

Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

Bucket:

- 10,8 kg
- 42 pcs per pallet
- pallet weight: 499 kg



SEALING TAPE




Used for protection against penetration of humidity and water where two surfaces overlap. Intended as a sealant for bathrooms, shower cubicles, terraces, balconies and swimming pools. For internal and external application.

- features: high insulation power and elasticity
- composition: polyester fabric TPE
- width of sealing: 7 cm
- dimensions: 10 or 50 m/12 cm

Length:

- 50 m
- 10 m



WALL CUFF



Used for protection against penetration of humidity and sealing of pipe and installation passageways. For application inside and outside rooms.

- features: high insulation power and elasticity
- composition: polyester fabric TPE
- dimensions: 120 x 120 mm

Packaging:


- 25 pcs
- 2 pcs



FLOOR CUFF

Used for protection against penetration of humidity and sealing of pipe and installation passageways. For internal and external application.

- features: high insulation power and elasticity
- composition: polyester fabric TPE
- dimensions: 350 x 350 mm


**Packaging:**

- 10 pcs
- 1 pcs

INTERNAL AND EXTERNAL CORNER

Used for protection against penetration of humidity and water where two surfaces overlap in corners. Intended as a sealant in bathrooms, shower cubicles, terraces, balconies and swimming pools. For internal and external application.

- features: high insulation power and elasticity
- composition: polyester fabric TPE
- width of sealing: 7 cm



- Internal corner - 1 pcs
- External corner - 1 pcs

Table 18. Application scope of bituminous materials

Stosowanie	DYSERBITUM 830	STYRBITUM 832
Renovation of roofing systems	●	●
Bituminous primer	●	●
Styrofoam adhesive	●	●
XPS adhesive	●	●
Horizontal insulation systems	●	●
Light vertical insulation systems	●	●
Heavy vertical insulation systems	●	●

● Allowed solutions ● Not recommended solutions


DYSERBITUM 830

Dispersion bitumen-rubber mass



Grout intended for applying Styrofoam and extruded panels and as hydro-insulation for foundations, basements and terraces. Primarily intended for renovation and maintenance of roofing. As sub-floor hydraulic insulation of terraces, balconies, basements, garages, irregularly shaped surfaces, as well as for creating permanently elastic hydro-insulation, water-tight layers of underground building parts (foundation slabs, foundations, etc.).

- colour: black
- single layer thickness: 1 mm
- number of mass layer: 2-4
- drying time: ca. 6 hours/layer
- consumption: 0,8-1,2 kg/m²



Bucket:

- 10 kg
- 55 pcs per pallet
- pallet weight: 580 kg

- 20 kg
- 33 pcs per pallet
- pallet weight: 690 kg


STYRBITUM 832

Dispersion adhesive mass



Intended for fixing styrofoam panels and panels of extruded styrofoam. For making under-floor hydro-insulations of terraces, balconies, basements and garages. Used for vertical and horizontal underground insulations of parts of buildings.

- colour: black
- single layer thickness: up to 2 mm
- number of mass layer: 2-4
- drying time - hydro-insulation: 3-5 days
- drying time - adhesive: up to 14 days
- consumption: 0,6-1,2 kg/m²



Bucket:

- 18 kg
- 33 pcs per pallet
- pallet weight: 624 kg

Gypsum products and finishes



Table 19. Properties of smooth surface finish products


							
	GYPSUM FINISH 601	GYPSUM FINISH 604	GYPSUM 602	GIPSEL EXTRA 600	GIPSEL PLUS 603	LIME FINISH 660	CEMENT- LIME FINISH 662
Base	gypsum	gypsum	cement and dolomite	resin	polymers	white	cement and lime
Colour	white	snow white	white	snow white	snow white	white	grey
Thickness layers	up to 3 mm	up to 3 mm	up to 5 mm	up to 2 mm	up to 2 mm	up to 3 mm	up to 5 mm
Ready-made product	●	●	●	●	●	●	●
Water resistance	●	●	●	●	●	●	●
Frost resistance	●	●	●	●	●	●	●
Dry processing (grinding)	●	●	●	●	●	●	●
Wet processing	●	●	●	●	●	●	●
Mechanical application	●	●	●	●	●	●	●
Application area							
Wet premises	●	●	●	●	●	●	●
Facades	●	●	●	●	●	●	●
Gypsum plasters	●	●	●	●	●	●	●
Cement-lime plasters	●	●	●	●	●	●	●
Lime plasters	●	●	●	●	●	●	●
Drywalls	●	●	●	●	●	●	●

● is present ● is not present

MANUAL-APPLICATION GYPSUM PLASTER 650

Intended for manual application of gypsum and smooth indoor plasters in rooms with a humidity of over 70%. Also intended for the manual application of plaster mortars under paints, or quality plasters on walls and ceilings made of autoclaved, aerated concrete, ceramic elements, lime-sandstone, concrete elements, etc. Indoor use.

- ultimate compressive strength: $\geq 2,0 \text{ N/mm}^2$
- working time: up to 120 minutes
- grain sizes: 0-1,2 mm
- consumption: ca. $8,5 \text{ kg/m}^2$ per 1 cm of mortar layer thickness
- coverage: up to $2,5 \text{ m}^2$ for thickness of 1 cm/bag

**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

MACHINE-SPRAYED GYPSUM PLASTER 651

Intended for machine-spray application of gypsum and smooth indoor plasters in rooms with a humidity of less than 70%. Suitable for mechanic and manual application of gypsum plaster grouts, under paint coats or quality plasters on walls and ceilings made of autoclaved aerated concrete, ceramic or lime-sandstone, concrete elements, etc. Indoor use.

- ultimate compressive strength: $\geq 2,0 \text{ N/mm}^2$
- working time: up to 180 minutes
- grain sizes: 0-1,2 mm
- consumption: ca. 10 kg/m^2 per 1 cm of mortar layer thickness
- coverage: up to $3,0 \text{ m}^2$ for thickness of 1 cm/bag

**Bag:**

- 30 kg
- 40 pcs per pallet
- pallet weight: 1230 kg

MACHINE-SPRAYED light GYPSUM PLASTER 651L

Machine-applied mortar for gypsum and smooth, light indoor plasters in rooms with a humidity of less than 70%. Intended for mechanic or manual application of gypsum plaster grouts under quality paints or plasters on walls and ceilings made of YTONG, HEBEL, etc. blocks, as well as ceramic, lime-sandstone, concrete surfaces. Indoor use.

- ultimate compressive strength: $\geq 2,0 \text{ N/mm}^2$
- working time: up to 180 minutes
- grain sizes: 0-1,2 mm
- consumption: ca. 8 kg/m^2 per 1 cm of mortar layer thickness
- coverage: up to $3,75 \text{ m}^2$ for thickness of 1 cm/bag

**Bag:**

- 30 kg
- 40 pcs per pallet
- pallet weight: 1230 kg

MACHINE-SPRAYED HARD GYPSUM PLASTER 651T

Machine-sprayed gypsum plaster with increased surface hardness



Intended for machine-spray application of gypsum, smooth, indoor plasters with increased surface hardness in rooms, in which air humidity does not exceed 70%. Suitable for mechanic or manual application of gypsum plaster grouts under paint coats or quality plasters on walls and ceilings made of autoclaved aerated concrete, ceramic or lime-sandstone, concrete elements.

- ultimate compressive strength: $\geq 6,0 \text{ N/mm}^2$
- working time: up to 180 minutes
- grain sizes: 0-1,2 mm
- consumption: ca. 10 kg/m^2 per 1 cm of mortar layer thickness
- coverage: up to $3,0 \text{ m}^2$ for thickness of 1 cm/bag



Bag:

- 30 kg
- 40 pcs per pallet
- pallet weight: 1230 kg


CONSTRUCTION GYPSUM PLASTER 610

Quick-setting gypsum binder



Environmentally friendly, universal gypsum binding agent with short setting time. Intended for filling groundwork unevenness, eliminating cavities and cracks, for mounting electrical installations, plaster strips, etc., as well as for jointing gypsum elements. Indoor use.

- ultimate compressive strength: $\geq 14 \text{ N/mm}^2$
- surface adhesion: $\geq 0,5 \text{ MPa}$
- working time: up to 8 minutes
- consumption: depending on the application method



Bag:

- 20 kg
- 54 pcs per pallet
- pallet weight: 1110 kg


GYPSUM ADHESIVE 680

Gypsum adhesive mortar



Adhesive intended for mounting plasterboards to various surfaces, as well as for gluing other gypsum elements. For mounting other gypsum elements and rigid boards constructed out of insulation materials to internal walls. For gypsum groundwork, brick and ceramic CMU surfaces, lime-sandstone block surfaces, elements constructed out of common and autoclaved aerated concrete. Indoor use.

- ultimate compressive strength: $\geq 6 \text{ N/mm}^2$
- concrete surface adhesion: $\geq 0,06 \text{ MPa}$
- working time: up to 10 minutes
- consumption: ca. $5,0 \text{ kg/m}^2$ for plasterboards
- coverage: up to 4 m^2 plasterboards



Bag:

- 20 kg
- 54 pcs per pallet
- pallet weight: 1110 kg


GYPSUM 691

Mortar for jointing plasterboards



Gypsum mortar for jointing plasterboards without reinforcing tape. Intended for jointing plasterboards with properly shaped edges without the use of reinforcing tape (reinforce non-factory, cut edges). Can be also used for filling cavities and levelling out mineral groundworks on indoor surfaces.

- ultimate compressive strength: $\geq 3,0 \text{ N/mm}^2$
- concrete surface adhesion: $\geq 0,25 \text{ MPa}$
- working time: up to 60 minutes
- consumption: ca. $1,0 \text{ kg/m}^2$ per 1 mm of layer thickness
- thickness layer: 3 mm
- coverage: up to $20,0 \text{ m}^2$ for thickness of 1 mm/bag



Bucket:

- 5 kg
- 200 pcs per pallet
- pallet weight: 1030 kg

Bag:

- 20 kg
- 54 pcs per pallet
- pallet weight: 1110 kg


GYPSUM PUTTY 690

Universal gypsum putty, 1-10 mm



Intended for repairing cavities, cracks, mounting electrical installations, for carrying out stucco works etc., and for jointing plasterboards using reinforcing tape. Can be used for various indoor mineral groundworks (concrete, cement-lime, ceramic, gypsum, etc.).

- ultimate compressive strength: $\geq 2,5 \text{ N/mm}^2$
- concrete surface adhesion: $\geq 0,25 \text{ MPa}$
- working time: up to 60 minutes
- consumption: ca. $1,0 \text{ kg/m}^2$ per 1 mm of layer thickness/bag
- coverage: up to $20,0 \text{ m}^2$ for thickness of 1 mm



Bag:

- 20 kg
- 54 pcs per pallet
- pallet weight: 1110 kg


GYPSUM FINISHING COAT 601

White gypsum finishing coat, layer up to 3 mm



Suitable for executing perfectly smooth layers under paints or quality plasters on walls and ceilings with cement-lime plasters, gypsum plasters, etc., or on plasterboard surfaces. For filling cavities and cracks. Indoor use.

- ultimate compressive strength: $\geq 2,0 \text{ N/mm}^2$
- surface adhesion: $\geq 0,1 \text{ MPa}$
- bonding onset: ≥ 50 minutes
- consumption: ca. $0,8 \text{ kg/m}^2$ per 1 mm of layer thickness/bag
- coverage: up to $25,0 \text{ m}^2$ for thickness of 1 mm



Bag:

- 20 kg
- 54 pcs per pallet
- pallet weight: 1110 kg


SUPER WHITE FINISHING COAT 604

Ultra white gypsum finishing coat, layer up to 3 mm



Suitable for creating perfectly smooth layers under paints or quality plasters on walls and ceilings with cement-lime plasters, gypsum plasters, etc., or on plasterboard surfaces. For filling cavities and cracks in plasters. Indoor use.

- ultimate compressive strength: $\geq 2,0 \text{ N/mm}^2$
- surface adhesion: $\geq 0,1 \text{ MPa}$
- suitability-for-use time: > 50 minutes
- consumption: ca. $0,8 \text{ kg/m}^2$ per 1 mm of layer thickness/bag
- coverage: up to $25,0 \text{ m}^2$ for thickness of 1 mm



Bag:

- 20 kg
- 54 pcs per pallet
- pallet weight: 1110 kg

GIPSEL EXTRA 600

Ready-to-use finishing coat, layer up to 2 mm



Ready-to-use compound for creating internal finishes, as well as in places with increased usable, thixotropic humidity. Appropriate to make ideally smooth layers under paints or noble plasters on walls and ceilings with cement-lime plasters, gypsum plasters or made of plasterboards. Intended for manual and machine application.

- bond strength to concrete substrate: $\geq 0,65 \text{ MPa}$
- bond strength to wooden substrate: $\geq 0,25 \text{ MPa}$
- bond strength to steel: $\geq 0,15 \text{ MPa}$
- coverage: ca. $1,9 \text{ kg/m}^2$ for 1 mm of the layer thickness
- coverage: up to $20,0 \text{ m}^2$ / bag



Bucket:

- 20 kg
- 33 pcs per pallet
- pallet weight: 701 kg


GIPSEL PLUS 603

Ready-to-use gypsum finishing coat, layer up to 2 mm



Ready-to-use, acrylic polymer based product which is intended for creating finishing coats in humid rooms. Suitable for executing perfectly smooth layers under paints or quality plasters on walls and ceilings with cement-lime plasters, gypsum plasters, etc., or on plasterboard surfaces. Extra white. Indoor use.

- concrete surface adhesion: $\geq 0,50 \text{ MPa}$
- wooden surface adhesion: $\geq 0,15 \text{ MPa}$
- consumption: ca. $1,9 \text{ kg/m}^2$ per 1 mm of layer thickness/bag
- coverage: up to $20,0 \text{ m}^2$ / bag



Bucket:

- 1,5 kg
- 224 pcs per pallet
- pallet weight: 380 kg

Bucket:

- 20 kg
- 33 pcs per pallet
- pallet weight: 701 kg


POZGLĄDŹ 602

White cement-dolomite finishing coat, layer up to 5 mm



Intended for manual execution of indoor and outdoor finishing coats on walls and ceilings. Suitable for executing perfectly smooth layers under paints or quality plasters on walls and ceilings with cement-lime plasters, gypsum plasters, etc., or on plasterboard surfaces. Can be used in rooms with air humidity above 70%.

- concrete surface adhesion: $\geq 0,25$ MPa
- suitability-for-use time: up to 120 minutes
- consumption: ca. $1,25 \text{ kg/m}^2$ per 1 mm of layer thickness
- coverage: up to $20,0 \text{ m}^2$ for thickness of 1 mm



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


LIME FINISH 660

White, ecological lime finish, layer up to 3 mm



Ecological, traditional finish for manual application of lime finishing coats inside rooms. Diffusively open. Appropriate for creating smooth layers under paints or noble plasters on walls and ceilings with priming cement-lime plasters or on concrete beds. For rubbing wet, without abrading.

- bond strength to concrete substrate: $\geq 0,2$ MPa
- suitability-for-use time: up to 180 minutes
- coverage: ca. $1,25 \text{ kg/m}^2$ for 1 mm of the layer thickness
- coverage: up to $20,0 \text{ m}^2$ for thickness of 1 mm



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


LIME-CEMENT FINISH 662

Freezeproof finish for cement-lime plasters, layer up to 5 mm



Finish for manual application of lime-cement finishing coats on walls and ceilings inside and outside rooms. Appropriate to be used on concrete, cement substrates and facades. For rubbing wet, without abrading. Water-proof and freezeproof.

- bond strength to concrete substrate: $\geq 0,2$ MPa
- grain size: 0,5 mm
- suitability-for-use time: up to 180 minutes
- coverage: ca. $1,25 \text{ kg/m}^2$ for 1 mm of the layer thickness
- coverage: up to $20,0 \text{ m}^2$ for thickness of 1 mm



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg



www.kreisel.pl

Ready-to-use finishing coat GIPSEL EXTRA 600

- for wall and ceiling smoothing works
- to fill defects, scratches and cracks in plasters
- appropriate for wet (dustless) processing
- on concretes, cement plasters, cement-lime plasters, lime or gypsum plasters, drywalls
- on wooden and metal substrates
- for indoor application
- an ideal priming agent under the following paints
- acrylic
- extra white
- smooth

Concrete repair system




Table 20. Properties of mortars intended for repairs in concrete

	 MORTAR 451	 MORTAR 456	 MORTAR 460
Function	Contact and anticorrosive mortar	The main reprofiling layer	The reprofiling, finish layer
Layer thickness [mm]	< 3	5-50	1-10
Workability period after water addition (min.)	< 60	< 60	< 60
Water volume per 25 kg of mixture (l)	5,7	4,0	5,5
Medium coverage per 1 sq.m/1 mm in kgs	1,6	1,9	1,4
Compressive strength [MPa]	≥ 30,0	≥ 25,0	≥ 25,0
Bending strength [MPa]	≥ 5,0	≥ 5,0	≥ 5,0
Strength of adhesion to concrete [MPa]	≥ 1,5	≥ 0,8	≥ 1,5
Shrinkage after 28 days of hardening [%]	< 0,14	< 0,12	< 0,16
Capillary absorption [kg/sq.m. min. 0,5]	≤ 0,5	≤ 0,5	≤ 0,5
Granulation	up to 0,5 mm	up to 4,0 mm	up to 0,5 mm
Classification EN 1504-3	R2		

RAPID SET ASSEMBLY MORTAR 425*Fast-binding cement mortar*

Mortar intended for quick mounting of metal elements (anchors, supports) and other elements in the groundwork, for repairing cavities and sealing local soaking spots in walls, concrete pipes, etc.

- grain sizes: 0,5 mm
- working time: up to 10 minutes
- compressive strength after 3 hours: ≥ 10 MPa
- resistance to bending after 28 days: ≥ 25 MPa
- consumption: avg ca. $1,6 \text{ kg/m}^2$
- coverage: ca. $15,5 \text{ m}^2/\text{bag}$

**Bucket:**

- 2 kg/168 pcs per pallet
- pallet weight: 366 kg


Bag:

- 25 kg/48 pcs per pallet
- pallet weight: 1230 kg

CEMENT MORTAR 451*Contact and anti-corrosive mortar in the concrete repair system*

Mortar 451 is intended for executing contact layers (adhesive bridge) and to provide anti-corrosive protection in the concrete repair system. The system can be used to repair damaged reinforced concrete affected by mechanic or corrosive factors. The system is suitable for repairing repairing elements, such as: balconies, terraces, supports, piles, lintels, etc. It is a binding layer between the repaired concrete or reinforced concrete element and Mortar 456 or Plaster 460.

- grain sizes: 0,5 mm
- compressive strength: ≥ 30 MPa
- consumption: ca. $1,6 \text{ kg/m}^2/1 \text{ mm}$
- coverage: ca. $15,5 \text{ m}^2/\text{bag}$


**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

REPAIR MORTAR 456*Repair mortar in the concrete repair system, 5-50 mm*

Mortar 456 is intended for executing the primary, re-profiling repair layer in the concrete repair system. The system can be used to repair, damaged reinforced concrete affected by mechanic or corrosive factors. The system is suitable for repairing such elements as: balconies, terraces, supports, piles, lintels, etc. it may be also used to execute local repairs or fill minor cavities in other concrete surfaces (e.g. ASR).

- grain sizes: up to 4,0 mm
- compressive strength: ≥ 25 MPa
- consumption: ca. $1,9 \text{ kg/m}^2/1 \text{ mm}$
- coverage: ca. $1,3 \text{ m}^2/\text{bag}$

**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


PLASTER 460

Repair finishing coat in the concrete repair system, 1-10 mm



Plaster 460 is intended for executing final finishing layers in the concrete repair system. The system can be used to repair concrete, damaged reinforced concrete affected by mechanic or corrosive factors. The system is suitable for repairing such elements as: balconies, terraces, supports, piles, lintels, etc. it may be also used to execute local repairs or fill minor cavities in other concrete surfaces (e.g. ASR).

- grain sizes: up to 0,5 mm
- compressive strength: ≥ 25 MPa
- consumption: avg ca. 1,4 kg/m²/1 mm
- coverage: ca. 17,8 m²/bag

**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

Renovation system



Table 21. Properties of products for renovation works

	 RENOVATION RENDERING COAT 910	 RENOVATION SUBSTRATE PLASTER 920	 RENOVATION PLASTER 921	 RENOVATION PLASTER 922	 RENOVATION PLASTER 923	 RENOVATION FINISH 930
Layer thickness	4-5 mm	10-20 mm	10-25 mm	10-20 mm	10-20 mm	up to 3 mm
Compressive strength	CS IV	CS III	CS II	CS II	CS I	CS I
Adhesion	> 0,5 MPa	≥ 0,2 MPa	> 0,2 MPa	≥ 0,2 MPa	> 0,1 MPa	> 0,2 MPa
Open porosity	-	> 45 %	> 40 %	> 40 %	-	-
Granulation	up to 2,0 mm	up to 2,0 mm	up to 2,0 mm	up to 0,5 mm	up to 0,5 mm	up to 0,5 mm

Table 22. Selection of products depending on the degree of salinity

Degree of salinity	Configuration of layers	Layer thickness	Technological break
Low	Obrzutka (rendering coat) 910	< 5,0 mm	3 days
	Renovation plaster 921 lub 922	10,0-20,0 mm	1 day/1 mm of layer
	Lime-cement surface finish (Gładz wapienno-cementowa) 930	< 5,0 mm	3 days to painting
Medium	Obrzutka (rendering coat) 910	< 5,0 mm	3 days
	Renovation plaster 920 or 921	10,0-20,0 mm	1 day/1 mm of layer
	Renovation plaster 921 or 922	10,0-20,0 mm	1 dzień/1 mm warstwy
	Lime-cement surface finish (Gładz wapienno-cementowa) 930	Surface finish < 3 mm	3 days to painting
High	Obrzutka (rendering coat) 910	< 5,0 mm	3 days
	Renovation substrate plaster 920	> 10,0 mm	1 day/1 mm of layer


INJECTION AND IMPREGNATION LIQUID 900

Liquid for impregnation of walls, pressure and gravitational injections



Specialist, organo-silicone agent for making a horizontal membrane (reconstruction of horizontal insulation) and for impregnation of porous materials. This agent is also suitable for priming beds before painting with silicate paints. Waterproof and freezeproof.

- pH: 12
- dilution with impregnation: 1:2-1:3
- coverage - impregnation: from 0,15 l/m²/1 cm
- coverage - injection: from 1,2l/rm of wall - 50 cm wide



Plastic container:

- 5 l
- 120 pcs per pallet
- pallet weight: 642 kg

RENOVATION RENDERING COAT 910

Renovation rendering coat



For mechanical or manual making of renovation plaster rendering coat under substrate plasters. It does not limit vapour permeability. Product consistent with guidelines of the WTA. For application inside and outside buildings.

- grain size: up to 2,0 mm
- category: CS IV
- layer thickness: 4-5 mm
- consumption: avg ca. 6-8 kg/m²
- coverage: ca. 5 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

RENOVATION SUBSTRATE PLASTER 920

Wide-pore, lime-cement substrate plaster, 10-20 mm



Specialist, wide-pore plaster intended for mechanical or manual application of renovation substrate plasters in places burdened with salts in a medium or high degree. It does not limit vapour permeability. Hydrophobic, with high porosity. It accumulates crystallising salts. Consistent with guidelines of the WTA.

- grain sizes: up to 2,0 mm
- category: CS III
- open porosity: > 45 %
- consumption: avg ca. 12,0 kg/m²/1 cm
- coverage: ca. 2,5 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

RENOVATION PLASTER 921

Grey, with trass, lime-cement plaster, 10-25 mm



Hydrophobic plaster, with high porosity, intended for mechanical or manual application of renovation plasters in places burdened with salts in a low, medium and high degree. It does not limit vapour permeability. It accumulates crystallising salts. Consistent with guidelines of the WTA.

- grain size: up to 2,0 mm
- category: CS II
- open porosity: > 40 %
- consumption: avg ca. 11,0 kg/m²/1 cm
- coverage: ca. 2,7 m²/bag



Bag:

- 30 kg
- 40 pcs per pallet
- pallet weight: 1230 kg

RENOVATION PLASTER 922

White, fine-grained lime-cement plaster, 10-20 mm



Plaster intended for mechanical or manual application of renovation plasters in places burdened with salts in a low, medium and high degree. It does not limit vapour permeability. Hydrophobic, with high porosity. It accumulates crystallising salts. Consistent with guidelines of the WTA.

- grain size: up to 0,5 mm
- category: CS II
- open porosity: > 40 %
- consumption: avg ca. 11,0 kg/m²/1 cm
- coverage: ca. 2,7 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

RENOVATION LIME PLASTER 923

White, lime plaster, 10-20 mm



Ecological lime plaster intended for mechanical or manual making of renovation plasters in places burdened with salts in a low and medium degree. It does not limit vapour permeability. Consistent with guidelines of the WTA.

- grain size: up to 0,5 mm
- category: CS I
- consumption: avg ca. 13,0 kg/m²/1 cm
- coverage: ca. 2,3 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

RENOVATION FINISH 930

Lime-cement finish, layer approx. 3 mm



Finish intended for smooth finishing of historic building renovation system. It does not limit vapour permeability, for rubbing wet. Intended for renovation of destroyed facades. Waterproof and freezeproof. Consistent with guidelines of the WTA.

- grain size: up to 0,5 mm
- category: CS I
- consumption: avg ca. 1,1 kg/m²/1 mm
- coverage: ca. 22,7 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


RENOVATION MORTAR 940

Reinforced with fibre, fine-grained, lime-cement repair mortar, 2-15 mm



Reparation and levelling mortar for reconstruction and filling of holes, renovation of surface of facades. Intended for renovation of cornices, reparation of scratches and cracks of facades and for puttying surface of walls. Quick-setting, waterproof and freezeproof.

- grain size: up to 0,5 mm
- compressive strength: > 10 MPa
- consumption: avg ca. 7,7 kg/m²/0,5 cm
- coverage: ca. 3,7 m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

Color Design...

Paint for indoor applications - COLOR 014

Based on newly produced raw materials our high quality, emulsion acrylic paint is characterised by its high strength, high coverage, durability and resistance to abrasion. It is the perfect paint for cement, cement-lime and gypsum plasters, gypsum finish surfaces, other mineral substrates and drywall panels for internal applications. This paint is intended for manual application using traditional tools such as a roller and a brush. It can also be used for spray machine application. We offer a broad range of 704 colours with the choice of 2.5, 5.0 and 10 litre packages, all of which are available at commercial sale points with our paint and plaster mixers.

Don't forget!

Any trace of grease, oil and other contaminations will compromise the coverage of the paint. The substrate must be cleaned with a detergent and all organic and fungal growth must be removed. The substrate must also be free from old paint layers to avoid delamination after application of the new paint layer. Make sure to protect areas that do not require painting and ensure that the substrate is primed with a suitable primer e.g. with GRUNTOLIT-SG 302 by KREISEL.



Subfloors



Table 23. Scope of subfloor applications I

								
	RENOGRUNT 410	RENOGRUNT 411	RENOGRUNT 412	RENOGRUNT 414	SCREED 420	SELF-LEVELLING UNDERLAYMENT 200	SELF-LEVELLING UNDERLAYMENT 201	SELF-LEVELLING SCREED 202
	Self-levelling screeds, liquidized							
Floor heating systems	●	●	●	●	●	●	●	●
Thermal insulation (floating subfloor)	●	●	●	●	●	●	●	●
Separating layer (foil)	●	●	●	●	●	●	●	●
Layer bonded to a substrate	●	●	●	●	●	●	●	●
Terraces and balconies	●	●	●	●	●	●	●	●
Bathrooms and kitchens	●	●	●	●	●	●	●	●

● Recommended solutions ● Not recommended solutions

Table 24. Scope of subfloor applications II

								
	GIGA CONCRETE 440	CONCRETE B-30 446	CONCRETE GROUT M-15 441	CONCRETE B-25 442	QUICK- SETTING SCREED 444	QUICK- SETTING CONCRETE B-30 445	LEVELLING MORTAR 428	STRONG CONCRETE B-20
	Screeds, subfloor					Levelling grouts		
Floor heating systems	●	●	●	●	●	●	●	●
Thermal insulation (floating subfloor)	●	●	●	●	●	●	●	●
Separating layer (foil)	●	●	●	●	●	●	●	●
Layer bonded to a substrate	●	●	●	●	●	●	●	●
Terraces and balconies	●	●	●	●	●	●	●	●
Bathrooms and kitchens	●	●	●	●	●	●	●	●

● Recommended solutions ● Not recommended solutions

SELF-LEVELLING UNDERLAYMENT 200

Internal, thick-layer anhydrite screed, 20-60 mm



Anhydrite screed for manual and machine application. Used as a base under ceramic tiles, panels, parquets and floor lining. Used for floor heating system, on a distribution layer, thermal insulation and as a floating base.

- foot traffic: after 48 hours
- the possibility of applying further layers: after 14 days
- compressive strength: $\geq 35 \text{ N/mm}^2$
- classification: CA-C35-F7
- consumption: ca. $18,0 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,4 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

SELF-LEVELLING UNDERLAYMENT 201

Internal, universal anhydrite screed, 3-60 mm



Anhydrite grout, used as a base under ceramic tiles, panels, parquets, floor lining. Intended for manual and machine application. Used for floor heating system, on a distribution layer, thermal insulation, as a floating base and bound with substrate.

- foot traffic: after 48 hours
- the possibility of performing further layers: after 14 days
- compressive strength: $\geq 30 \text{ N/mm}^2$
- classification: CA-C30-F6
- consumption: ca. $18,0 \text{ kg/m}^2 / 1 \text{ cm}$
- coverage: ca. $1,4 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

SELF-LEVELLING SCREED 202

Internal, universal anhydrite screed, 2-20 mm



Thin-layer anhydrite grout for manual and machine application. A base under ceramic tiles, panels, floor lining, etc. Used for levelling anhydrite screeds, also on a floor heating system. For application inside rooms.

- foot traffic: po min. 48 godz.
- the possibility of applying further layers: after 7 days
- compressive strength: $\geq 30 \text{ N/mm}^2$
- classification: CA-C30-F5
- consumption: ca. $18 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,4 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

NEW

RENOGRUNT 410

Cement, thin-layer self-levelling screed, 2-20 mm



Screed intended for manual or mechanic application of levelling-finishing layers on indoor flooring bases. Ideal for levelling cement bases in heated flooring.

- foot traffic: after 5 hours
- the possibility of applying further layers: after 7 days
- compressive strength: $\geq 30 \text{ N/mm}^2$
- classification: CA-C30-F7
- consumption: ca. $15 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,7 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

RENOGRUNT 411

Cement, medium-layer, self-levelling screed, 5-35 mm



Screed intended for manual or mechanic application of levelling-finishing layers on indoor flooring bases. Ideal for levelling cement bases in heated flooring. It contains reinforcing fibers.

- foot traffic: after 6 hours
- the possibility of applying further layers: after 7 days
- compressive strength: $\geq 30 \text{ N/mm}^2$
- classification: CT-C30-F7
- consumption: ca. $15 \text{ kg/m}^2 / 1 \text{ cm}$
- coverage: ca. $1,7 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

RENOGRUNT 412

Cement, fast-binding, self-levelling screed, 2-20 mm



Screed intended for manual or mechanic application of levelling-finishing layers on indoor flooring bases. Fast drying times allow for the possibility of treading 2 hours after pouring the grout. Ideal for levelling cement bases in heated flooring. Quick binding allows for accelerated work pace.

- foot traffic: after 2 hours
- the possibility of applying further layers: after 24 hours
- compressive strength: $\geq 30 \text{ N/mm}^2$
- classification: CT-C30-F5
- consumption: ca. $15 \text{ kg/m}^2 / 1 \text{ cm}$
- coverage: ca. $1,7 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

RENOGRUNT 414

Self-levelling concrete for wood substrates and under parquet, 2-30 mm



Specialist cement self-levelling screed, ideal for difficult beds such as floor heating, OSBs, chipboards and other wood-based. Due to high shear strength it is ideal under parquets, pasted floors. It contains reinforcing fibres.

- foot traffic: after 3 hours
- the possibility of applying further layers: after 3 days (ceramic tiles)
- compressive strength: $\geq 25 \text{ N/mm}^2$
- classification: CT-C25-F6
- consumption: ca. $15 \text{ kg/m}^2 / 1 \text{ cm}$
- coverage: ca. $1,7 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

SCREED 420

Freezeproof external screed which spreads, 15-60 mm



Liquefied screed under ceramic tiles, panels, parquets and floor lining. Used for floor heating system, on a distribution layer, thermal insulation and as a floating base. On terraces and balconies.

- foot traffic: after 24 hours
- the possibility of applying further layers: after 14 days
- compressive strength: $\geq 35 \text{ N/mm}^2$
- classification: CT-C35-F7
- consumption: ca. $18 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,4 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

GIGA CONCRETE 440

High strength GIGA CONCRETE 40 MPa, freezeproof, from 25 mm



Specialist screed used for floor heating system, on a distribution layer, thermal insulation and as a floating subfloor. Intended for terraces and balconies and for fixing fence posts and making concrete elements. A base under ceramic tiles, panels, parquets.

- foot traffic: after 48 hours
- the possibility of applying further layers: after 28 days
- compressive strength: $\geq 40 \text{ N/mm}^2$
- classification: CT-C40-F6
- consumption: ca. $19,3 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,3 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

CONCRETE SCREED M-15 441

Cement, universal, freezeproof screed, 25-80 mm



A basic cement screed. Used on a distribution layer and as bound with substrate. A base under ceramic tiles, panels, parquets and for fixing fence posts.

- foot traffic: after 48 hours
- the possibility of applying further layers: after 28 days
- compressive strength: $\geq 16 \text{ N/mm}^2$
- classification: CT-C16-F4
- consumption: ca. $20 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,25 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

CONCRETE B-25 442

Cement, universal, freezeproof screed, 10-80 mm



A universal screed. Used for floor heating system, on a distribution layer, thermal insulation and as a floating base. A base under ceramic tiles, panels, parquets as well as on terraces and balconies. For fixing fence posts and making concrete elements.

- foot traffic: after 48 hours
- the possibility of applying further layers: after 28 days
- compressive strength: $\geq 25 \text{ N/mm}^2$
- classification: EN 1505-3:2005
- consumption: ca. $20 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,25 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

QUICK-SETTING SCREED 444

Quick-setting cement subfloor, 25-80 mm



A specialist, quick-setting screed. Used on a distribution layer and as bound with substrate. A base under ceramic tiles, panels and for fixing fence posts.

- foot traffic: after 24 hours
- the possibility of applying further layers: after 5 days
- compressive strength: $\geq 16 \text{ N/mm}^2$
- classification: CT-C16-F4
- consumption: ca. $18 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,25 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


QUICK-SETTING CONCRETE B-30 445

Quick-setting, high strength cement mortar, 25-100 mm



Mortar intended for quick fixing of e.g.: fence posts and making different concrete elements, for reparation of concrete beds with similar strength and other reparation works at home and in a garden. After drying up, it is waterproof and freezeproof. Ideal for making floor screeds. Bonds after 15 minutes.

- forms can be stripped after 2 hours
- operational load: after 24 hours
- compressive strength: $\geq 30 \text{ N/mm}^2$
- classification: EN 1504-3:2005
- consumption: ca. $20,0 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,25 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

CONCRETE B-30 446

High strength concrete mortar, freezeproof, from 25 mm



Mortar used for floor heating system, on a distribution layer, thermal insulation, as a floating base. On terraces and balconies. For fixing fence posts and making concrete elements. A base under ceramic tiles, panels, parquets, etc.

- foot traffic: after 48 hours
- the possibility of applying further layers: after 28 days
- compressive strength: $\geq 30 \text{ N/mm}^2$
- consumption: ca. $20,0 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,3 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

NEW


STRONG CONCRETE B-20

Universal concrete mortar, freezeproof, 25-80 mm



Mortar used for making different concrete elements and reparation works at home and in a garden for fixing posts. Used as a floor base for floor heating system, on a distribution layer, thermal insulation, as a floating base and on terraces and balconies.

- foot traffic: after 48 hours
- the possibility of applying further layers: after 28 days
- compressive strength: $\geq 20 \text{ N/mm}^2$
- classification: EN 1504-3:2005
- consumption: ca. $20,0 \text{ kg/m}^2 / 1 \text{ cm}$
- coverage: ca. $1,25 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


LEVELLING MORTAR 428

Universal, freezeproof mortar for levelling walls and floors, 2-50 mm



For levelling substrate before fixing tiles and styrofoam panels. For filling installation grooves, losses. Used on concrete, ceramic elements and cement-limestone plasters. For levelling floor bases.

- foot traffic: after 24 hours
- the possibility of applying further layers: after 2 days
- compressive strength: $\geq 20 \text{ N/mm}^2$
- classification: CT-C20-F5
- consumption: ca. $20,0 \text{ kg/m}^2/1 \text{ cm}$
- coverage: ca. $1,4 \text{ m}^2/\text{bag}/1 \text{ cm}$



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

Masonry mortars



Table 25. Properties of mortars

					
	POZMUR 115	POZMUR 116	POZMUR 117	THERMAL INSULATION MORTAR 120	PUSTLEP 140
Intended use:	general purpose	general purpose	general purpose	porous, thermal insulation clay blocks	glass blocks
Temperature of use	from +5 °C to +25 °C				
Colour	grey	grey	grey	grey	white and grey
Joint thickness	5-20 mm	5-20 mm	5-20 mm	10-15 mm	ca. 10 mm
Workability time period after mortar preparation in temperature of 20 °C	ca. 2 h	ca. 2 h	ca. 2 h	ca. 2 h	ca. 2 h
Average consumption per 1 sq. m. of wall surface	ca. 40 kg*	ca. 40 kg*	ca. 40 kg*	ca. 0 l**	ca. 18 kg
Compressive strength after 28 days of hardening	> 5,0 N/mm ²	> 10,0 N/mm ²	> 15,0 N/mm ²	> 2,5 N/mm ²	> 10,0 N/mm ²
Frost resistance	Yes	Yes	Yes	Yes	Yes
Water resistance	Yes	Yes	Yes	Yes	Yes
Thermal conductivity λ	<1,17W/m*K	<1,17W/m*K	<1,17W/m*K	<1,18W/m*K	<1,17W/m*K

* - Average consumption per 1 sq. m. of wall, built on width of 12 cm

** - Consumption when 38 cm blocks are used

POZMUR 115 M5

Masonry mortar



Indoor and outdoor use masonry mortar. Intended for erecting walls and pillars from ceramic, lime-sandstone, cement, concrete, autoclaved aerated concrete elements and other.

- compressive strength: M5
- joint strength: $\geq 0,15 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-2 mm
- consumption: autoclaved aerated concrete (thickness 24 cm) - 44 kg/m²



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

POZMUR 116 M10

Strong masonry mortar



Mortar for building elements with higher strength requirements. For application inside and outside, for construction of walls and pillars of ceramic, lime-sand, cement, concrete elements and elements of cellular concrete etc.

- compressive strength: M10
- joint strength: $\geq 0,15 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-2 mm
- consumption: autoclaved aerated concrete (thickness 24 cm) - 44 kg/m²



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

POZMUR 117 M15

Construction masonry mortar



This mortar is perfect for building foundation and construction walls. Intended mainly for building concrete blocks as well as bricks, especially those which require high mechanical strength from mortar. Suitable for construction of walls and pillars of ceramic, lime-sand, cement, concrete elements.

- compressive strength: M15
- joint strength: $\geq 0,15 \text{ N/mm}^2$
- reaction to fire: A1
- grain sizes: 0 - 2 mm
- bulk density dry mix: ca. 1,45 g/cm³
- coverage: ca. 1,88 kg/1 dm³



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

NEW

THERMAL INSULATION MORTAR 120

Masonry mortar for thermal insulation



Masonry mortar for erecting partitions with thermal insulation properties from blocks, CMUs and heat-retaining brick. Indoor and outdoor use.

- compressive strength: M2,5
- joint strength: $\geq 0,15 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-2 mm
- consumption: CMU block 38 cm wide - ca. 35 l/m²



Bag:

- 30 l
- 40 pcs per pallet
- pallet weight: 710 kg

PUSTLEP 140

Masonry mortar for glass hollow bricks



The mortar is intended for building internal and external walls of glass hollow bricks and for making reinforced peripheral ribs in these walls. It prevents movement of reinforcement laid in joints and prevents reinforcement from contact with glass surface of hollow bricks.

- compressive strength: M10
- joint strength: $\geq 0,15 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-2 mm
- consumption: ca. 18 kg/m² of wall of glass hollow bricks 19x19x8 cm.



Bucket:

Grey, white mortar:

- 15 kg
- 33 pcs per pallet
- pallet weight: 525 kg

Table 26. Properties of winter mortars

				
	MURLEP BZ 121	MURLEP BZ 122	MURLEP Z 123	MURLEP Z 124
Intended use	Building of structures from aerated concrete blocks or silicates with thin mortar joints			
Temperature of use	from 0 °C to 25 °C			
Colour	White	White	Grey	Grey
Joint thickness	1-3 mm			
Workability time period after mortar preparation in temperature of 20 °C	Approx. 3 hours in temperature of 10 °C			
Consumption	block 12 cm wide - approx. 3 kg/sq.m. block 24 cm wide - approx. 6 kg/sq.m. block 36 cm wide - approx. 9 kg/sq.m. the use of interlocking blocks will reduce mortar consumption by approx. 20%			
Compressive strength	> 5,0 N/mm ²	≥ 10,0 N/mm ²	> 5,0 N/mm ²	≥ 10,0 N/mm ²
Frost resistance	Yes	Yes	Yes	Yes
Water resistance	Yes	Yes	Yes	Yes


MURLEP BZ 121 M5

Winter, white thin-layer masonry mortar



White, thin-layer masonry mortar dedicated to low temperatures - above 0°C, for autoclaved aerated and silicate blocks. Indoor and outdoor use.

- compressive strength: M5
- joint strength: ≥ 0,30 N/mm²
- reaction to fire: class A1
- grain sizes: 0-0,5 mm
- joint thickness: up to 3 mm
- consumption: autoclaved aerated concrete (thickness 24 cm) - ca. 6 kg/m²



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


MURLEP BZ 122 M10

Winter, white thin-layer masonry mortar



White, thin-layer masonry mortar for building elements which require higher strength to thin joints of blocks of cellular concrete and silicate blocks. For application inside and outside in winter periods at temperatures of over 0°C.

- compressive strength: M10
- joint strength: $\geq 0,30 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-0,5 mm
- joint thickness: up to 3 mm
- consumption: autoclaved aerated concrete (thickness 24 cm) - ca. 6 kg/m²



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


MURLEP Z 123 M5

Winter, thin-layer masonry mortar



Thin-layer masonry mortar for low-temperature works - above 0°C, intended for autoclaved aerated and silicate blocks. Indoor and outdoor use.

- compressive strength: M5
- joint strength: $\geq 0,30 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-0,5 mm
- joint thickness: up to 3 mm
- consumption: autoclaved aerated concrete (thickness 24cm) - ca. 6 kg/m²



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg


MURLEP Z 124 M10

Winter, thin-layer masonry mortar



Mortar for building elements which require higher strength to thin joints of blocks of cellular concrete, gas concrete and silicate blocks. For application inside and outside in winter periods, at temperatures no lower than 0°C.

- compressive strength: M10
- joint strength: $\geq 0,30 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-0,5 mm
- joint thickness: up to 3 mm
- consumption: autoclaved aerated concrete (thickness 24cm) - ca. 6 kg/m²



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

Table 27. Properties of thin-layer mortars

	   			
	MURLEP 125	MURLEP-B 126	MURLEP 127	MURLEP B 128
Intended use	Building of structures from aerated concrete blocks or silicates with thin mortar joints			
Temperature of use	from +5 °C to 25 °C			
Colour	White	Grey	White	Grey
Joint thickness	1-3 mm			
Workability time period after mortar preparation in temperature of 20 °C	Approx. 3 hours			
Consumption	block 12 cm wide - approx. 3 kg/sq.m. block 24 cm wide - approx. 6 kg/sq.m. block 36 cm wide - approx. 9 kg/sq.m. the use of interlocking blocks will reduce mortar consumption by approx. 20%			
Compressive strength	> 5,0 N/mm ²	≥ 5,0 N/mm ²	> 10,0 N/mm ²	≥ 10,0 N/mm ²
Frost resistance	Yes	Yes	Yes	Yes
Water resistance	Yes	Yes	Yes	Yes


MURLEP 125 M5

Thin-layer masonry mortar



Mortar for making external and internal walls of blocks of cellular concrete linked with thin joints. It is also suitable to build walls of lime-sand blocks (silicate).

- compressive strength: M5
- joint strength: ≥ 0,30 N/mm²
- reaction to fire: class A1
- grain sizes: 0-0,5 mm
- joint thickness: up to 3 mm
- consumption: autoclaved aerated concrete (thickness 24 cm) - ca. 6 kg/m²




Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

MURLEP-B 126 M5*White, thin-layer masonry mortar*

White mortar for making external and internal walls of blocks of cellular concrete linked with thin joints. It is also suitable for building walls of lime-sand blocks (silicate).

- compressive strength: M5
- joint strength: $\geq 0,30 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-0,5 mm
- joint thickness: up to 3 mm
- consumption: autoclaved aerated concrete (thickness 24 cm) - ca. 6 kg/m^2


**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

MURLEP 127 M10*Thin-layer masonry mortar*

Mortar for making external and internal elements with higher strength requirements of blocks of cellular concrete and silicate blocks linked with thin joints.

- compressive strength: M10
- joint strength: $\geq 0,30 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-0,5 mm
- joint thickness: up to 3 mm
- consumption: autoclaved aerated concrete (thickness 24 cm) - ca. 6 kg/m^2


**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

MURLEP-B 128 M10*White, thin-layer masonry mortar*

White mortar for making external and internal walls of blocks of cellular concrete linked with thin joints. It is also suitable for building walls of lime-sand blocks (silicate).

- compressive strength: M10
- joint strength: $\geq 0,30 \text{ N/mm}^2$
- reaction to fire: class A1
- grain sizes: 0-0,5 mm
- joint thickness: up to 3 mm
- consumption: autoclaved aerated concrete (thickness 24 cm) - ca. 6 kg/m^2

**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

NEW

Plastering mortars



Table 28. Properties of cement-lime plasters I

				
	500	501	503SL	511L
Scope of use	5-15 mm	5-20 mm	5-25 mm	5-15 mm
Granulation max.	0,5 mm	1,4 mm	0,5 mm	0,5 mm
Colour	Grey	Grey	Grey	White
Thermal conductivity λ	$\leq 0,67$	$\leq 0,47$	$< 0,47$	$< 0,47$
Compressive strength	CSII	CSIII	CSII	CSII
Frost resistance	Yes	Yes	No	Yes
Water resistance	Yes	Yes	Yes	Yes
Coverage per 1 m ² / 1 cm	12,5 kg	13,0 kg	9,0 kg	12,5 kg

Table 29. Properties of cement-lime plasters II

				
	520	561	561L	560
Scope of use	5-30 mm	5-25 mm	5-25 mm	8-25 mm
Granulation max.	1,2 mm	0,6 mm	0,6 mm	1,4 mm
Colour	Grey	Grey	Grey	Grey
Thermal conductivity λ	0,12	$< 0,47$	$< 0,47$	$\leq 0,83$
Compressive strength	CSII	CSII	CSII	CSII
Frost resistance	Yes	No	No	Yes
Water resistance	Yes	Yes	Yes	Yes
Coverage per 1 m ² / 1 cm	12,5 l	14,0 kg	11,0 kg	18,5 kg

HEAT-INSULATING PLASTER 520

Heat insulating cement-lime plaster, 5-30 mm



Plaster intended for manual making of heat insulating finishing coats. It is especially advisable to plaster walls made of materials with high thermal insulating power (e.g. Ytong, Porothersm, expanded clay aggregate blocks and other). For application inside and outside buildings.

- grain sizes: up to 1,2 mm
- category: CS II
- thermal conductivity λ : $\leq 0,12$ W/m*K
- consumption: avg ca. $12,5$ l/m² / 1 cm
- coverage: ca. $2,3$ m²/bag



Bag:

- 30 l
- 40 pcs per pallet
- pallet weight: 1230 kg

CEMENT RENDERING COAT 550

Cement rendering coat



For mechanical or manual making of traditional cement plaster rendering coat under substrate plasters. On walls and masonry ceilings of blocks of cellular concrete, ceramic elements, silicate elements and on concrete beds. For application inside and outside buildings.

- grain sizes: up to 1,4 mm
- category: CS IV
- layer thickness: 4-5 mm
- consumption: avg ca. $6-8$ kg/m²
- coverage: ca. 5 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

POZTYNK 560

Traditional, manual plastering mortar, 8-25 mm



For manual making of traditional finishing coats. On walls and masonry ceilings of blocks of cellular concrete, ceramic elements, silicate elements and on concrete beds. For application inside and outside buildings.

- grain sizes: up to 1,4 mm
- category: CS II
- consumption: ca. $18,5$ kg/m² / 1 cm
- coverage: ca. $1,35$ m²/bag



Bag:

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

SMOOTH SPRAY APPLIED PLASTER 500

Smooth, freezeproof cement-lime spray applied plaster, 5-15 mm



The plaster is intended for mechanical or manual application of smooth thin-layer single-layer finishing coats. On walls and masonry ceilings of blocks of cellular concrete, ceramic elements, concrete elements. For application inside and outside buildings.

- grain sizes: up to 0,5 mm
- category: CS II
- consumption: avg ca. 12,5 kg/m²/ 1cm
- coverage: ca. 2,3 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

SPRAY APPLIED PLASTER 501

Freezeproof cement-lime spray applied plaster, 5-20 mm



The plaster is intended for mechanical or manual application of multi-layer finishing coats. On walls and masonry ceilings of blocks of cellular concrete, ceramic elements, concrete elements. For application inside and outside buildings and for humid rooms.

- grain sizes: up to 1,4 mm
- category: CS III
- consumption: avg ca. 13,0 kg/m²/ 1cm
- coverage: ca. 2,2 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

SUPER LIGHT SPRAY APPLIED PLASTER 503SL

Machine-applied, cement-lime plaster, ultra-light, 5-25 mm



This highly-efficient plaster is intended for mechanical or manual making of multi-layer finishing coats. On walls and masonry ceilings of blocks of cellular concrete, ceramic elements, concrete elements. Applied in humid rooms.

- grain sizes: up to 0,5 mm
- category: CS I
- consumption: avg ca. 9,0 kg/m²/ 1cm
- coverage: ca. 3,3 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

LIGHT WHITE PLASTER 511L

White, light, machine-applied, cement-lime plaster, 5-15 mm



The plaster is intended for mechanical or manual application of smooth single-layer finishing coats. On walls and masonry ceilings of blocks of cellular concrete, ceramic elements and concrete elements. For application inside and outside buildings and for humid rooms.

- grain sizes: up to 0,5 mm
- category: CS II
- consumption: avg ca. 12,5 kg/m²/ 1cm
- coverage: ca. 2,3 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

SPRAY APPLIED PLASTER 561

Machine-applied, cement-lime plaster, 5-25 mm



The plaster is intended for mechanical or manual application of smooth finishing coats. On walls and masonry ceilings of blocks of cellular concrete, ceramic elements and concrete elements.

- grain sizes: up to 0,6 mm
- category: CS II
- consumption: avg ca. 14 kg/m²/1 cm
- coverage: ca. 2,1 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg

LIGHT SPRAY APPLIED PLASTER 561L

Machine-applied, cement-lime plaster, light, 5-25 mm



The light plaster is intended for mechanical or manual application of smooth finishing coats. On walls and masonry ceilings of blocks of cellular concrete, ceramic elements and concrete elements. Waterproof, intended for indoor applications and in humid rooms.

- grain sizes: up to 0,6 mm
- category: CS II
- consumption: avg ca. 11 kg/m²/ 1cm
- coverage: ca. 2,7 m²/bag



Bag:

- 30 kg
- 42 pcs per pallet
- pallet weight: 1290 kg



www.kreisel.pl

No.	Product	Silo technique	Indoor	Outdoor
500	SMOOTH SPRAY APPLIED PLASTER	●	●	●
501	SPRAY APPLIED PLASTER	●	●	●
503SL	SUPER LIGHT SPRAY APPLIED PLASTER	●	●	○
511L	LIGHT WHITE PLASTER	●	●	●
520	HEAT-INSULATING PLASTER	○	●	●
561	SPRAY APPLIED PLASTER	●	●	○
561L	LIGHT SPRAY APPLIED PLASTER	●	●	○
550	CEMENT RENDERING COAT	●	●	●
560	POZTYNK PLASTER MORTAR	○	●	●

Protecting and cleaning agents

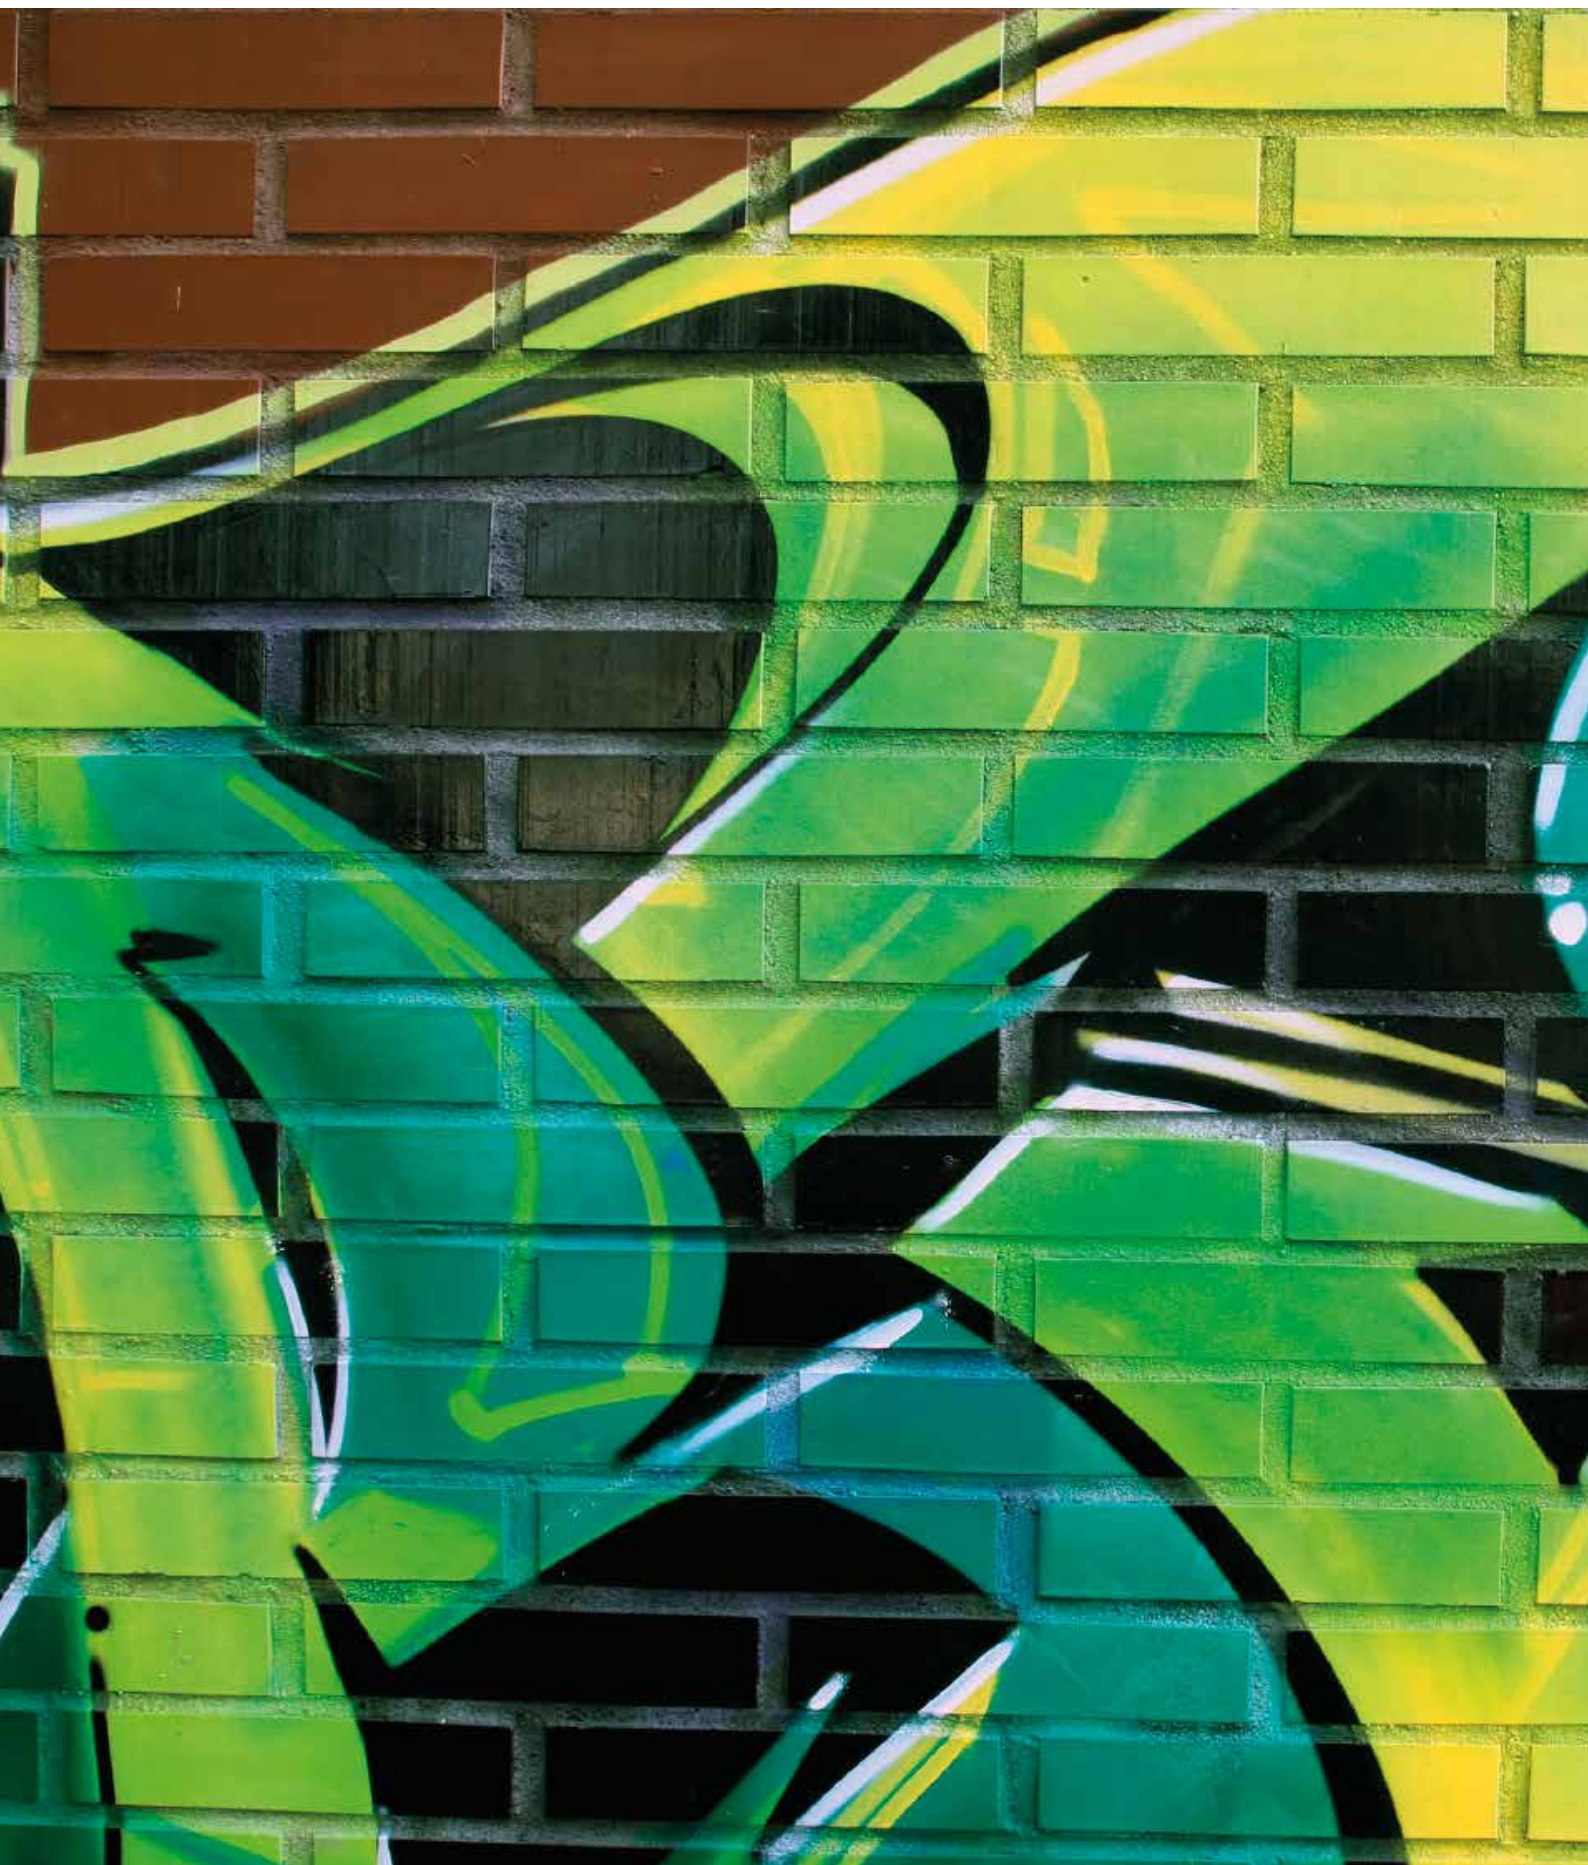


Table 30. Properties and application scope of protective and cleaning agents

	 ANTIGRAFFITI 1006	 RESIDUE REMOVER 1007	 SEPTOBUD 1008	 HYDROMUR-W 1010
Intended use	Protection against graffiti	Removal of cement residues	Aggressive biological disinfectant	Impregnation, hydrophobisation
Base	WATER	WATER	WATER	WATER
pH	7	2,5	3,5	6-8
Colour	Colourless	Colourless	Colourless	Colourless
Application areas				
Clinkerised elements	●	●	●	●
Ceramic tiles	●	●	●	●
Stone elements	●	●	●	●
Decorative plasters	●	●	●	●
Facade paints	●	●	●	●
Traditional plasters	●	●	●	●
Roof tiles	●	●	●	●
Steel	●	●	●	●
Noble metals	●	●	●	●
Plastics	●	●	●	●
Sanitary ceramics	●	●	●	●

● is present ● is not present

ANTYGRAFFITI 1006

Anti-graffiti protective coating



Dispersive solution creating a colourless protective coat, easily washable using pressurized hot water. After washing the coat must be restored to provide further protection. Intended for securing surfaces against spray paint; dedicated to cement-lime plasters, thin-layer dispersive plasters, facade paints, clinker cladding, stone cladding, etc. Do not apply on non-absorbent groundworks, such as: ceramic tiles, laminates, sheet metal.

- colour: colourless after drying
- layer drying-up time: ca. 24 hours
- number of layers: 2
- consumption: 0,2 - 0,7 l/m² depending of substrate absorbency
- coverage: up to 5 m²/1 kg



Bucket:

- 1 kg
- 8 pcs per carton
- carton weight: 9 kg

RESIDUE REMOVER 1007


Cement and lime sediment remover



Intended for non-aggressive removal of various types of cement and lime sediments. For washing dirt and stains produced by water-borne minerals, rust, etc. For cleaning ceramic tiles and other, clinker bricks, chrome-plated elements, noble metal elements, plastic elements, and varnished elements.

Indoor and outdoor use.

- bulk density: 1,05 g/cm³
- colour: colourless after drying
- layer drying-up time: depending on the temperature
- consumption: depending on the degree of staining



Plastic container:

- 1 l
- 12 pcs per carton
- carton weight: 13 kg


SEPTOBUD 1008

Biocide



Intended for removing microorganisms (algae, mold) on facades, plasters, etc. Also suitable for cleaning, disinfecting walls roofs, rustproof production devices, sanitary equipment, etc. Indoor and outdoor use.

- bulk density: 1,00 g/cm³
- colour: colourless after drying
- layer drying-up time: depending on the temperature
- pH: ca. 3,5
- consumption: ca. 0,15 - 0,2 l/m² depending on the degree of staining
- coverage: up to 35 m² /5 l



Plastic container:

- 0,5 l
- 12 pcs per carton
- carton weight: 6,7 kg

- 1 l
- 12 pcs per carton
- carton weight: 13 kg

- 5 l
- 120 pcs per pallet
- carton weight: 642 kg

HYDROMUR-W 1010

Water-based hydrophobizing agent



Intended for creating a hydrophobic film on absorbent surfaces of construction elements, both indoor and outdoor. For securing facades against the penetration of rainwater and aggressive compounds. Intended for mineral plasters (without gypsum content), stone cladding, concrete, terrazzo, mineral paint coats, ceramic brick walls, clinker, silicate surfaces, ceramic and cement roof tiles, cement-fiber panels, etc.

- bulk density: 1,00 g/cm³
- colour: colourless after drying
- consumption: ca. 0,2 - 0,7 l/m² depending on the degree of staining
- coverage: up to 25 m² / 5 l



Plastic container:

- 1 l
- 12 pcs per carton
- carton weight: 13 kg

- 5 l
- 120 pcs per pallet
- carton weight: 642 kg

Additional materials



SAND FOR SANDPITS 098



Sand for filling sandpits on playgrounds for children and home gardens. Safe, has an attestation of the National Institute of Hygiene (PZH). Ready for application.

- grain size: 0,1-0,5 mm
- consumption: depending on application

**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

DECORATIVE QUARTZ SAND 099



Sand for general use: for performing construction works, making simple building mortars, filling sandpits on playgrounds for children.

- grain size: 0,5-1,4 mm
- consumption: depending on application

**Bag:**

- 25 kg
- 48 pcs per pallet
- pallet weight: 1230 kg

AGREGAT KALETA-5

It is intended for mechanical application of gypsum, gypsum-lime, lime-cement plasters and for making self-levelling grouts after changing a screw pump and pressure pipe.

- capacity of intake hopper: 135 kg of mixture
- efficiency: 6-60 l/min. (depending on mixture and type of pump)
- max. forcing pressure: 30 atm
- mortar feeding distance: 20 m (depending on mixture and type of pump)



Price:

• [info](#)

AGREGAT KALETA-5 SUPER

It is intended for mechanical application of gypsum, gypsum-lime, lime-cement plasters and for making self-levelling grouts after changing a screw pump and pressure pipe.

- capacity of intake hopper: 135 kg of mixture
- efficiency: 6-60 l/min. (depending on mixture and type of pump)
- max. forcing pressure: 30 atm
- mortar feeding distance: 20 m (depending on mixture and type of pump)



Price:

• [info](#)

MOSAIC RENDER SAMPLE 051 *



TTTT



MMMM



DDDD



CCCC




TTDD



DDDT



DDCT




CCCC




TTTC



CCTM



DDDC



CCCT



UUUU




FFFF



BBBB




GGGG



BBBT




GGGN



FFCJ




GGCI



BDNF



CDNB




CCGD



CCGG

* The tables are for colour demonstration purposes only.


MOSAIC RENDER SAMPLE 051 *




JJJJ




IIII




AAAA



SSSS




ABIL



FFFJ



BBGI




SSSC




TTJJ



TBIJ



ASDD



CIIS



NNNN



OOOO



KKKK




PPPP



TNNO



TNNF



NNNS




TNGG




NNJJ



OGTM




BBIK




PCBG


MOSAIC RENDER SAMPLE 051 *




TTDB



UUCT



TDCG



CUMM




NNTM



UNDD




UCJO




CCUO




ZZZZ




ZZZT



ZZZC



ZCCC

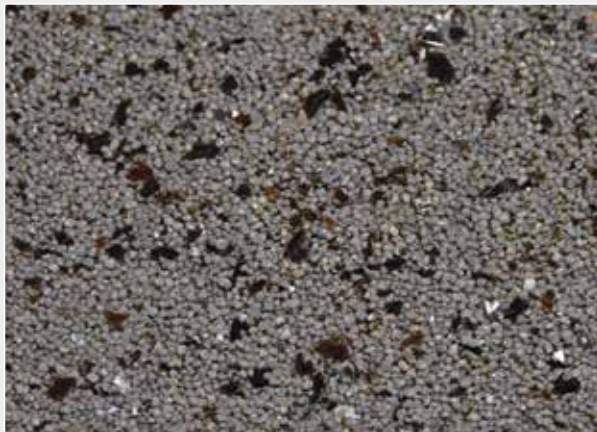

Colour: DDDD Granulation: 1,8 mm + MICA black



Colour: NNNN Granulation: 1,8 mm+ MICA silver



Colour: GGGG Granulation: 1,2 mm



Colour: GGGG Granulation: 1,8 mm











* The tables are for colour demonstration purposes only.





















ARCHITECTURAL CONCRETE 055 - MODEL STRUCTURES






































* The tables are for colour demonstration purposes only.


COLOUR CHART *Trendy!*

								
T1 80%	T2 77%	T3 71%	T4 66%	T5 56%	T6 51%	T7 45%	T8 39%	T9 34%
								
T10 76%	T11 68%	T12 60%	T13 50%	T14 44%	T15 39%	T16 35%	T17 33%	T18 30%
								
T19 77%	T20 68%	T21 60%	T22 55%	T23 51%	T24 48%	T25 43%	T26 35%	T27 30%
								
T28 76%	T29 68%	T30 59%	T31 50%	T32 42%	T33 37%	T34 34%	T35 31%	T36 28%

								
T37 75%	T38 66%	T39 57%	T40 46%	T41 39%	T42 36%	T43 34%	T44 30%	T45 27%
								
T46 75%	T47 65%	T48 56%	T49 47%	T50 42%	T51 38%	T52 35%	T53 33%	T54 27%
								
T55 72%	T56 64%	T57 55%	T58 49%	T59 43%	T60 38%	T61 33%	T62 28%	T63 26%
								
T64 80%	T65 71%	T66 61%	T67 51%	T68 42%	T69 34%	T70 30%	T71 25%	T72 23%
























								
T73 77%	T74 68%	T75 65%	T76 58%	T77 55%	T78 52%	T79 47%	T80 40%	T81 36%
								
T82 79%	T83 75%	T84 69%	T85 62%	T86 58%	T87 50%	T88 41%	T89 37%	T90 33%
								
T91 75%	T92 62%	T93 58%	T94 52%	T95 47%	T96 41%	T97 36%	T98 30%	T99 28%
								
T100 73%	T101 67%	T102 61%	T103 56%	T104 52%	T105 47%	T106 44%	T107 37%	T108 33%

								
T109 76%	T110 70%	T111 66%	T112 59%	T113 52%	T114 48%	T115 45%	T116 41%	T117 37%
								
T118 69%	T119 60%	T120 55%	T121 49%	T122 47%	T123 41%	T124 39%	T125 36%	T126 32%
								
T127 69%	T128 63%	T129 60%	T130 52%	T131 48%	T132 44%	T133 40%	T134 37%	T135 33%
								
T136 78%	T137 73%	T138 68%	T139 55%	T140 50%	T141 45%	T142 39%	T143 33%	T144 29%













								
T145 83%	T146 82%	T147 80%	T148 79%	T149 76%	T150 74%	T151 71%	T152 69%	T153 67%
								
T154 80%	T155 80%	T156 76%	T157 75%	T158 73%	T159 72%	T160 69%	T161 65%	T162 63%
								
T163 81%	T164 75%	T165 75%	T166 70%	T167 68%	T168 65%	T169 62%	T170 58%	T171 57%
								
T172 81%	T173 77%	T174 72%	T175 70%	T176 66%	T177 62%	T178 58%	T179 55%	T180 53%

COLOUR CHART *California* *























A

			
A11 20%	A12 26%	A13 32%	A14 40%
			
A21 29%	A22 29%	A23 36%	A24 40%
			
A31 26%	A32 40%	A33 56%	A34 69%
			
A41 38%	A42 53%	A43 64%	A44 67%
			
A51 33%	A52 50%	A53 41%	A54 58%
			
A61 32%	A62 41%	A63 55%	A64 55%
			
A71 60%	A72 66%	A73 75%	A74 75%
			
A81 47%	A82 62%	A83 61%	A84 74%















C

			
C11 17%	C12 28%	C13 43%	C14 59%
			
C21 31%	C22 46%	C23 61%	C24 72%
			
C31 25%	C32 24%	C33 39%	C34 43%
			
C41 27%	C42 48%	C43 52%	C44 73%
			
C51 39%	C52 53%	C53 68%	C54 70%
			
C61 42%	C62 55%	C63 68%	C64 76%
			
C71 54%	C72 56%	C73 53%	C74 68%
			
C81 42%	C82 46%	C83 58%	C84 61%

B

			
B11 21%	B12 34%	B13 44%	B14 62%
			
B21 31%	B22 31%	B23 48%	B24 66%
			
B31 36%	B32 49%	B33 47%	B34 58%
			
B41 38%	B42 42%	B43 61%	B44 72%
			
B51 40%	B52 47%	B53 53%	B54 65%
			
B61 58%	B62 67%	B63 74%	B64 78%
			
B71 72%	B72 73%	B73 78%	B74 78%
			
B81 53%	B82 69%	B83 82%	B84 76%

D

			
D11 59%	D12 69%	D13 71%	D14 80%
			
D21 45%	D22 70%	D23 78%	D24 83%
			
D31 60%	D32 72%	D33 80%	D34 80%
			
D41 54%	D42 66%	D43 76%	D44 81%
			
D51 61%	D52 73%	D53 74%	D54 85%
			
D61 59%	D62 68%	D63 74%	D64 78%
			
D71 61%	D72 64%	D73 62%	D74 70%
			
D81 48%	D82 58%	D83 58%	D84 55%

* The tables are for colour demonstration purposes only.


COLOUR CHART **Color Design** *



TIPS AND DESCRIPTIONS OF SYMBOLS:






II	Price group: I, II, III, IV	20081	The number of a colour	
A	Acrylic render AKRYTYNK 010		ACRYLIC PAINT 001	
	Silicate-silicone render SISITYNK 040		LATEX PAINT 011	
	Nano-silicone render SILIKON PROTECT 031		INTERIOR PAINT Colour 014	
	Polysilicone BIO-render BIOTYNK 042		Polysilicone facade paint BIOPAINT 008	
	Ecological thin-layer render ECO TYNK 022		ELASTIC PAINT 007	
	ARCHITECTURAL CONCRETE 055			
B	Silicate render SILIKATYNK 020		Winter silicate render SILIKATYNK-Z 021	
C	SILICONE PAINT 003		Nano-silicone facade paint NANOTECH 006	
D	SILICATE PAINT 002		Silicate-silicone paint SISI PAINT 004	
	Ecological facade paint ECO PAINT 009			









II	III	II	II	I
2000263%A	2000668%A B	2001071%A B C	2001476%A B C D	2001880%A B C D
III	II	I	I	I
2007761%A B	2008169%A B C D	2008574%A B C D	2008978%A B C D	2009382%A B C D
III	II	II	I	I
2015267%A	2015675%A B C D	2016081%A B C D	2016483%A B C D	2016885%A B C D
II	II	I	I	I
2022768%A	2023173%A	2023578%A C	2023983%A B C D	2024387%A B C D
III	II	II	I	I
2030259%A B	2030669%A B C D	2031078%A B C D	2031481%A B C D	2031884%A B C D
II	II	I	I	I
2037756%A B C	2038165%A B C D	2038570%A B C D	2038980%A B C D	2039382%A B C D
III	III	II	I	I
2040267%A	2040674%A	2041081%A C	2041484%A B C D	2041888%A B C D
III	II	II	I	I
2045245%A	2045657%A B C	2046066%A B C D	2046482%A B C D	2046883%A B C D
III	I	I	I	I
2052745%A B C	2053163%A B C D	2053570%A B C D	2053982%A B C D	2054385%A B C D
II	I	I	I	I
2060237%A C	2060651%A B C D	2061063%A B C D	2061476%A B C D	2061880%A B C D




















I	I	I	I	I
2102748%A B C	2103161%A B C D	2103570%A B C D	2103972%A B C D	2104379%A B C D
III	II	II	I	I
2110246%A	2110662%A C	2111068%A C	2111475%A C	2111882%A B C
II	II	I	I	I
2117730%A C	2118148%A B C D	2118560%A B C D	2118971%A B C D	2119380%A B C D
IV	II	II	II	I
2125239%A	2125646%A	2126052%A C	2126461%A	2126867%A
III	II	I	I	I
2132736%A	2133155%A C	2133563%A C	2133974%A B C D	2134378%A B C D
III	II	II	II	I
2140221%A C	2140635%A C	2141047%A C	2141459%A C	2141874%A B C D
III	II	I	I	I
2147733%A	2148147%A C	2148554%A B C D	2148964%A B C D	2149377%A B C D
III	III	II	I	I
2155234%A	2155647%A C	2156061%A C	2156465%A C	2156877%A B C D

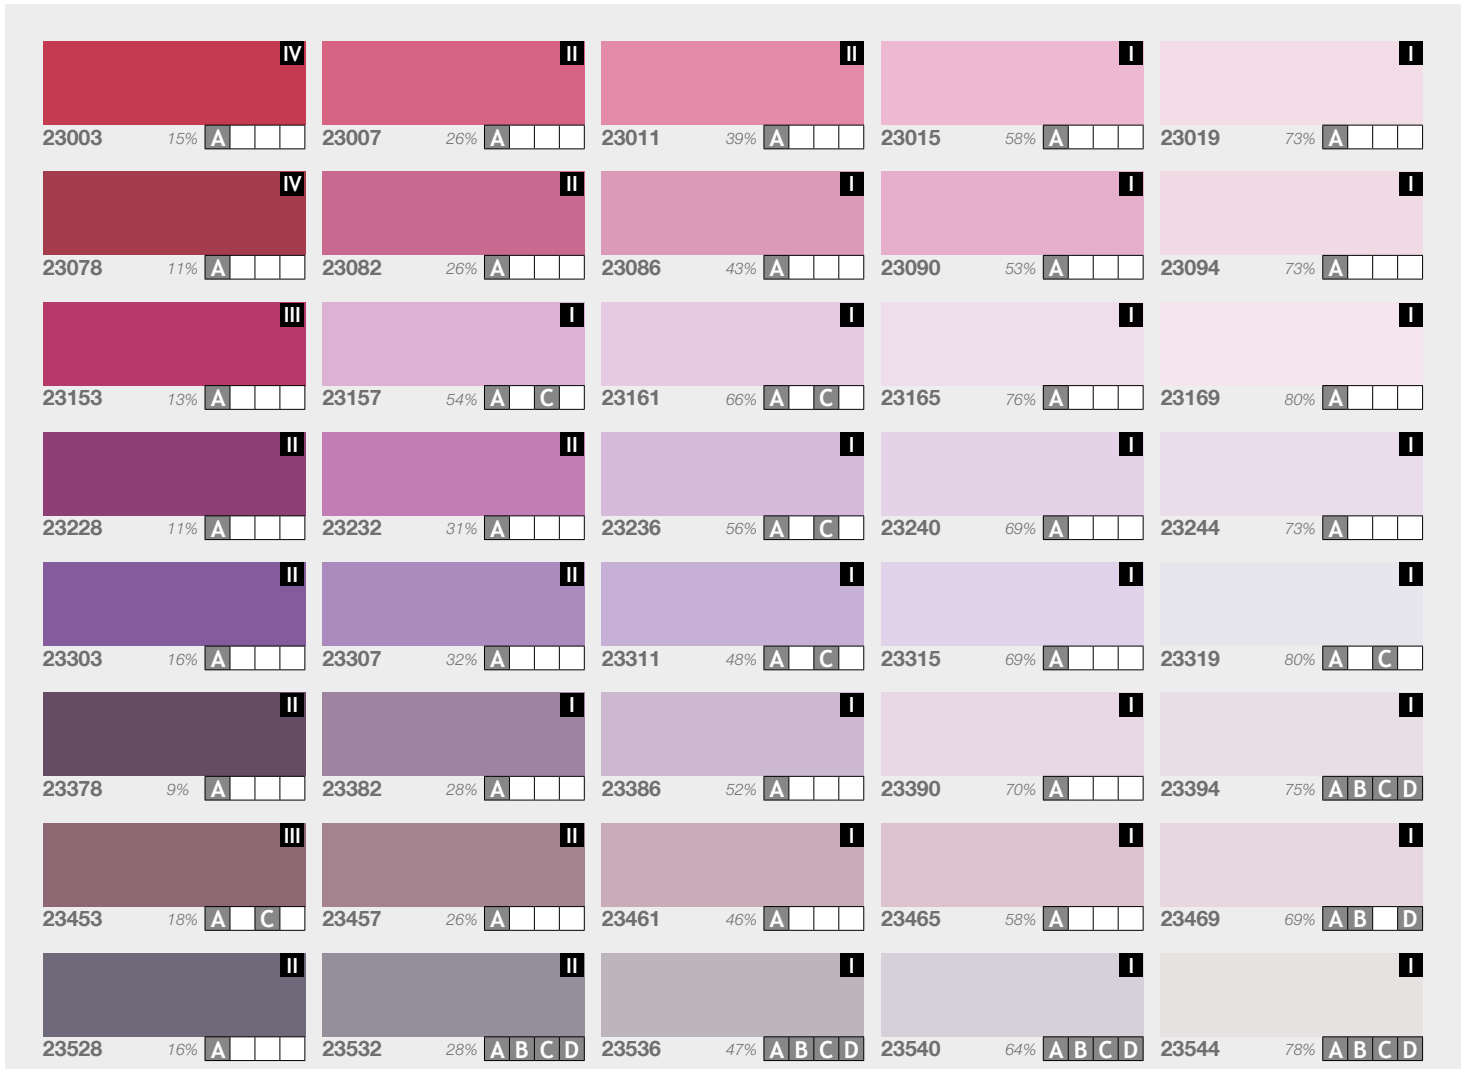

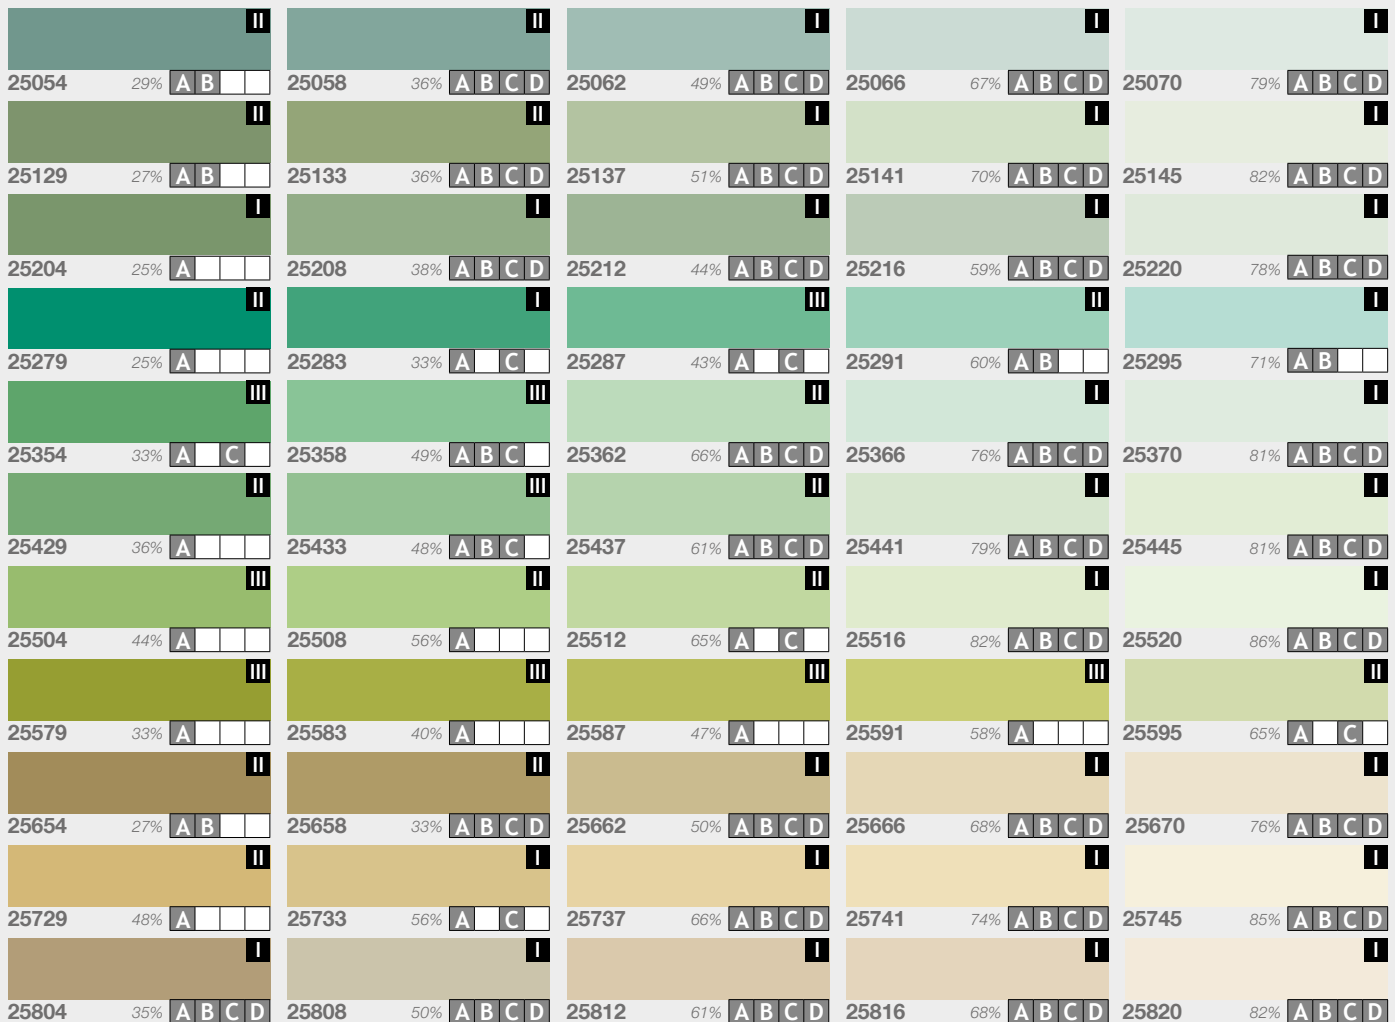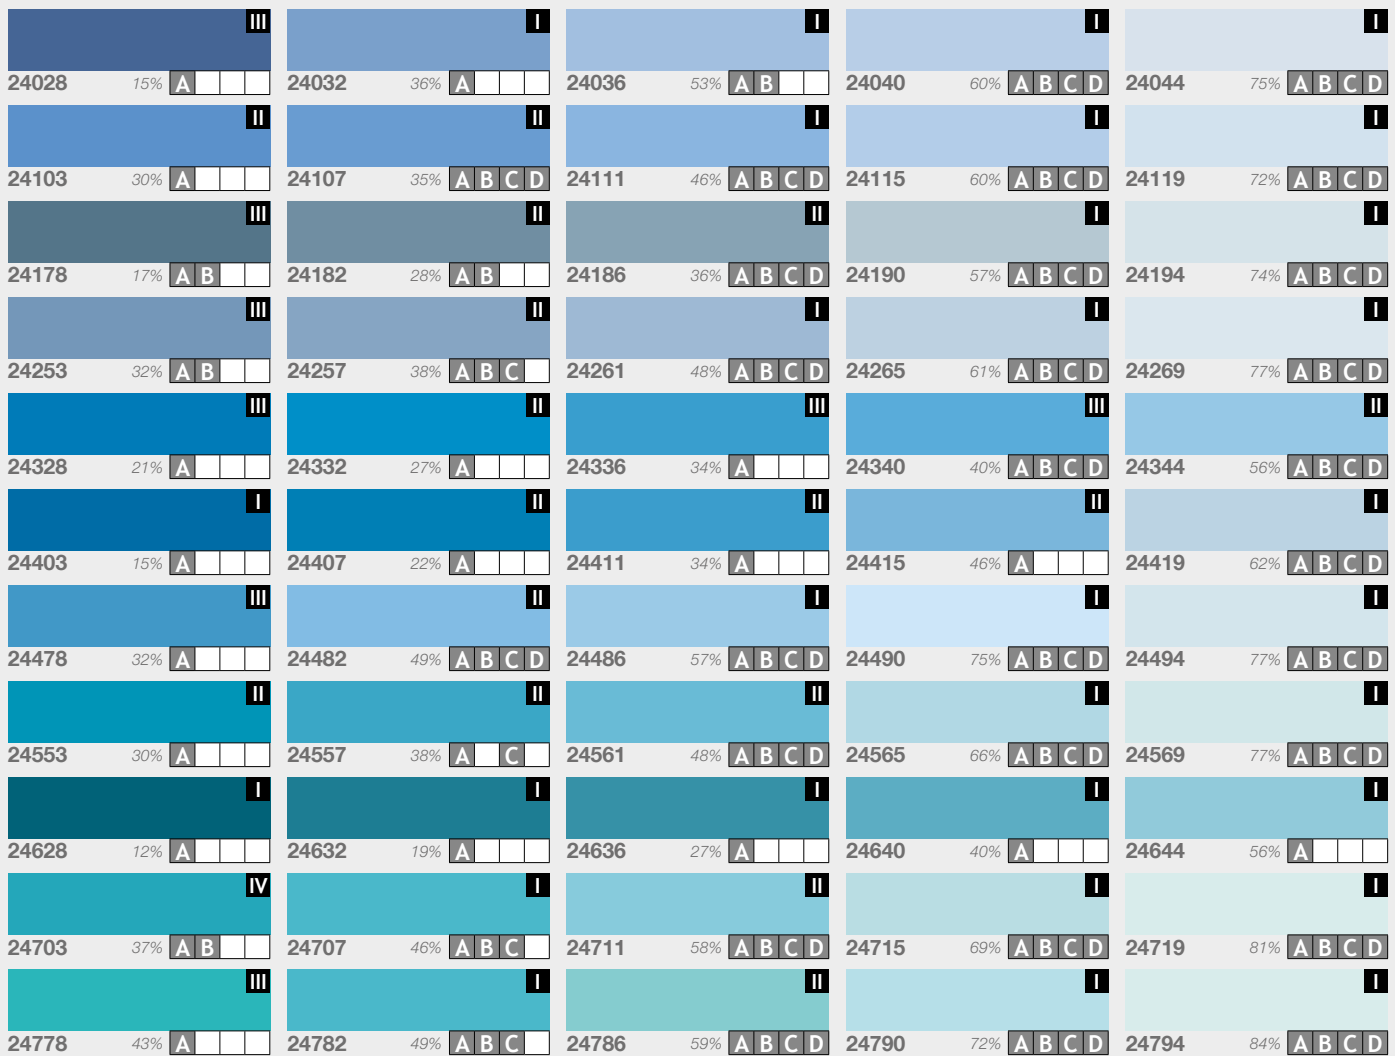









 II	 II	 I	 I	 I
26004 25% A 	26008 33% A B C 	26012 46% A B C D 	26016 51% A B C D 	26020 67% A B C D 
 III	 I	 I	 I	 I
26079 18% A B C 	26083 32% A B C D 	26087 52% A B C D 	26091 60% A B C D 	26095 77% A B C D 
 II	 I	 I	 I	 I
26154 18% A B 	26158 28% A B C 	26162 38% A B C D 	26166 46% A B C D 	26170 65% A B C D 
 I	 I	 I	 I	 I
26229 15% A 	26233 22% A B C 	26237 37% A B C D 	26241 49% A B C D 	26245 65% A B C D 
 I	 I	 I	 I	 I
26304 30% A B C D 	26308 43% A B C D 	26312 61% A B C D 	26316 67% A B C D 	26320 77% A B C D 
 I	 I	 I	 I	 I
26379 27% A B C D 	26383 36% A B C D 	26387 56% A B C D 	26391 68% A B C D 	26395 76% A B C D 
 II	 I	 I	 I	 I
26454 18% A 	26458 28% A B C 	26462 49% A B C D 	26466 60% A B C D 	26470 77% A B C D 
 II	 I	 I	 I	 I
26529 15% A 	26533 21% A B 	26537 29% A B C D 	26541 50% A B C D 	26545 75% A B C D 
 II	 I	 I	 I	 I
26604 11% A 	26608 23% A B C 	26612 37% A B C D 	26616 57% A B C D 	26620 68% A B C D 

 I	 I	 I	 I	 I
27029 14% A B 	27033 21% A B C 	27037 32% A B C D 	27041 47% A B C D 	27045 64% A B C D 
 I	 I	 I	 I	 I
27104 13% A 	27108 26% A B C D 	27112 42% A B C D 	27116 51% A B C D 	27120 69% A B C D 
 I	 I	 I	 I	 I
27179 17% A 	27183 30% A B C D 	27187 45% A B C D 	27191 54% A B C D 	27195 70% A B C D 
 II	 I	 I	 I	 I
27254 11% A 	27258 21% A 	27262 30% A 	27266 40% A B C D 	27270 64% A B C D 
 I	 I	 I	 I	 I
27329 13% A 	27333 31% A B C 	27337 44% A B C D 	27341 51% A B C D 	27345 62% A B C D 
 I	 I	 I	 I	 I
27404 14% A B 	27408 31% A B C 	27412 49% A B C D 	27416 55% A B C D 	27420 64% A B C D 
 I	 I	 I	 I	 I
27479 14% A B C 	27483 33% A B C D 	27487 51% A B C D 	27491 63% A B C D 	27495 82% A B C D 
 I	 I	 I	 I	 I
27554 26% A B C D 	27558 41% A B C D 	27562 53% A B C D 	27566 66% A B C D 	27570 76% A B C D 







 I	 I	 I	 I	 I
28010 85% A B C D 	28012 80% A B C D 	28014 84% A B C D 	28016 85% A B C D 	28018 85% A B C D 
 I	 I	 I	 I	 I
28020 84% A B C D 	28026 85% A B C D 	28028 86% A B C D 	28030 75% A B C D 	28036 80% A B C D 
 I	 I	 I	 I	 I
28038 83% A B C D 	28040 75% A B C D 	28046 80% A B C D 	28048 84% A B C D 	28050 78% A B C D 
 I	 I	 I	 I	 I
28056 82% A B C D 	28058 84% A B C D 	28060 80% A B C D 	28066 82% A B C D 	28068 84% A B C D 
 I	 I	 I	 I	 I
28070 79% A B C D 	28076 83% A B C D 	28078 84% A B C D 	28080 83% A B C D 	28086 84% A B C D 
 I				
28088 85% A B C D 				

* The tables are for colour demonstration purposes only.





COLOUR CHART NANOTECH GROUT 730, SILVER GROUT 731 *

							
1A PURE WHITE	2A WHITE	3A PLATINUM	4A SILVER	5A MANHATTAN	6A STEEL	7A GREY	8A GRAPHITE
							
9A ECRU	10A CAPPUCCINO	11A BAHAMA	12A BEIGE	13A CARAMEL	14A LIGHT BROWN	15A BROWN	16A DARK BROWN
							
17A JASMINE	18A GOLDEN SAND	19A APRICOT	20A BRICK-RED	21A OLIVE	22A GREEN	23A DARK BLUE	24A BLACK

COLOUR CHART SILICONE NANOTECH 720 *

							
							25A COLOURLESS
							
1A PURE WHITE	2A WHITE	3A PLATINUM	4A SILVER	5A MANHATTAN	6A STEEL	7A GREY	8A GRAPHITE
							
9A ECRU	10A CAPPUCCINO	11A BAHAMA	12A BEIGE	13A CARAMEL	14A LIGHT BROWN	15A BROWN	16A DARK BROWN
							
17A JASMINE	18A GOLDEN SAND	19A APRICOT	20A BRICK-RED	21A OLIVE	22A GREEN	23A DARK BLUE	24A BLACK

COLOUR CHART: POZMUR-KL NANO 130, CLINKER GROUT 701, GROUT FOR FACADE STONE 702 *

			
WHITE	LIGHT GREY	GREY	GRAPHITE
			
SAND	BROWN	BRICK-RED	BLACK

COLOR FACADE BOARDS



DARK OLIVE



LIGHT GOLD OAK



LIGHT WALNUT



DARK GOLD OAK



DARK WALNUT



MAHOGANY



WENGE



GREY

CALENDAR 2018

JANUARY tydz. 01 02 03 04 05 Pn. 1 8 15 22 29 Wt. 2 9 16 23 30 Śr. 3 10 17 24 31 Cz. 4 11 18 25 Pt. 5 12 19 26 So. 6 13 20 27 Nd. 7 14 21 28	FEBRUARY tydz. 05 06 07 08 09 Pn. 5 12 19 26 Wt. 6 13 20 27 Śr. 7 14 21 28 Cz. 1 8 15 22 Pt. 2 9 16 23 So. 3 10 17 24 Nd. 4 11 18 25	MARCH tydz. 09 10 11 12 13 Pn. 5 12 19 26 Wt. 6 13 20 27 Śr. 7 14 21 28 Cz. 1 8 15 22 29 Pt. 2 9 16 23 30 So. 3 10 17 24 31 Nd. 4 11 18 25	APRIL tydz. 13 14 15 16 17 18 Pn. 2 9 16 23 30 Wt. 3 10 17 24 Śr. 4 11 18 25 Cz. 5 12 19 26 Pt. 6 13 20 27 So. 7 14 21 28 Nd. 1 8 15 22 29
MAY tydz. 18 19 20 21 22 Pn. 7 14 21 28 Wt. 1 8 15 22 29 Śr. 2 9 16 23 30 Cz. 3 10 17 24 31 Pt. 4 11 18 25 So. 5 12 19 26 Nd. 6 13 20 27	JUNE tydz. 22 23 24 25 26 Pn. 4 11 18 25 Wt. 5 12 19 26 Śr. 6 13 20 27 Cz. 7 14 21 28 Pt. 1 8 15 22 29 So. 2 9 16 23 30 Nd. 3 10 17 24	JULY tydz. 26 27 28 29 30 31 Pn. 2 9 16 23 30 Wt. 3 10 17 24 31 Śr. 4 11 18 25 Cz. 5 12 19 26 Pt. 6 13 20 27 So. 7 14 21 28 Nd. 1 8 15 22 29	AUGUST tydz. 31 32 33 34 35 Pn. 6 13 20 27 Wt. 7 14 21 28 Śr. 1 8 15 22 29 Cz. 2 9 16 23 30 Pt. 3 10 17 24 31 So. 4 11 18 25 Nd. 5 12 19 26
SEMPTEMBER tydz. 35 36 37 38 39 Pn. 3 10 17 24 Wt. 4 11 18 25 Śr. 5 12 19 26 Cz. 6 13 20 27 Pt. 7 14 21 28 So. 1 8 15 22 29 Nd. 2 9 16 23 30	OCTOBER tydz. 40 41 42 43 44 Pn. 1 8 15 22 29 Wt. 2 9 16 23 30 Śr. 3 10 17 24 31 Cz. 4 11 18 25 Pt. 5 12 19 26 So. 6 13 20 27 Nd. 7 14 21 28	NOVEMBER tydz. 44 45 46 47 48 Pn. 5 12 19 26 Wt. 6 13 20 27 Śr. 7 14 21 28 Cz. 1 8 15 22 29 Pt. 2 9 16 23 30 So. 3 10 17 24 Nd. 4 11 18 25	DECEMBER tydz. 48 49 50 51 52 01 Pn. 3 10 17 24 31 Wt. 4 11 18 25 Śr. 5 12 19 26 Cz. 6 13 20 27 Pt. 7 14 21 28 So. 1 8 15 22 29 Nd. 2 9 16 23 30

LIST OF TABLES:

Table 1.	Properties of decorative plasters	9
Table 2.	Consumption and coverage of decorative plasters, depending on structure and granulation	9
Table 3.	Composition of thermal wall insulation systems	17
Table 4.	The scope of adhesive mortars, intended for thermal insulation systems	20
Table 5.	The scope of adhesive-reinforcing mortars, intended for thermal insulation systems	20
Table 6.	Plaster application options	25
Table 7.	Properties of outdoor paints	33
Table 8.	Properties of indoor paints	39
Table 9.	The scope of application of tile adhesives MULTI line	41
Table 10.	The scope of application of tile adhesives EXPERT line	44
Table 11.	The scope of application of tile adhesives GEL line	48
Table 12.	The average consumption of dry mortars for expansion joints in grams per 1 metre of joint length	49
Table 13.	Joint length per 1 sq. m. of surface	49
Table 14.	Application of stone adhesives	53
Table 15.	Clinker products	57
Table 16.	Properties of priming agents	61
Table 17.	Properties and application areas of waterproof insulation systems	67
Table 18.	Application scope of bituminous materials	71
Table 19.	Properties of smooth surface finish products	73
Table 20.	Properties of mortars intended for repairs in concrete	81
Table 21.	Properties of products for renovation works	85
Table 22.	Selection of products depending on the degree of salinity	85
Table 23.	Scope of subfloor applications I	91
Table 24.	Scope of subfloor applications II	91
Table 25.	Properties of mortars	99
Table 26.	Properties of winter mortars	102
Table 27.	Properties of thin-layer mortars	104
Table 28.	Properties of cement-lime plasters I	107
Table 29.	Properties of cement-lime plasters II	107
Table 30.	Properties and application scope of protective and cleaning agents	113







Poznań



Będzin



Ujazd



Rogowiec



Lubień Kujawski



Ostrołęka

Poznań

60-462, ul. Szarych Szeregów 23
 ☎ zamowienia.poznan@kreisel.pl
 ☎ + 48 61 846 79 00

Ujazd

97-225, ul. 11. listopada 29
 ☎ zamowienia.ujazd@kreisel.pl
 ☎ +48 44 726 16 00

Będzin

42-504, ul. Bory 41a
 ☎ zamowienia.bedzin@kreisel.pl
 ☎ +48 32 368 04 00

Rogowiec

97-427, ul. Zakładowa 2
 ☎ zamowienia.rogowiec@kreisel.pl
 ☎ + 48 44 735 23 38

Lubień Kujawski

87-840, Kaliska 141
 ☎ zamowienia.kaliska@kreisel.pl
 ☎ + 48 54 237 85 00

Ostrołęka

07-400, ul. Łużycka 5
 ☎ zamowienia.ostroleka@kreisel.pl
 ☎ + 48 29 646 15 00